


# USE AND CARE MANUAL

## 16 LIGHT PENDANT

Model number: 21265

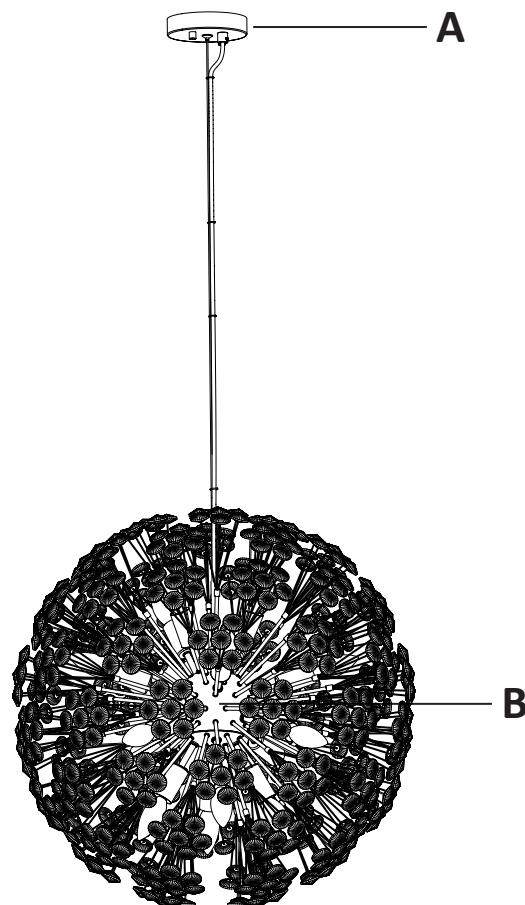

## Hardware (Parts are not to scale)

<b>H1</b> Mounting bracket (Pre-assembled to canopy assembly (A)) 1 pc	<b>H2</b> Support screw (long) (Pre-assembled to mounting bracket (H1)) 2 pcs	<b>H3</b> Hex nut (Pre-assembled to support screw (long) (H2)) 2 pcs	<b>H4</b> Outlet box screw (short) 2 pcs	<b>H5</b> Green ground screw (Pre-assembled to mounting bracket (H1)) 1 pc
<b>H6</b> Wire connector 3 pcs	<b>H7</b> Cap nut (Pre-assembled to support screw (long) (H2)) 2 pcs	<b>H8</b> Wire clip (Pre-assembled to fixture wire) 4 pcs	<b>H9</b> Plastic screw (Pre-assembled to canopy assembly (A)) 1 pc	<b>H10</b> Nipple 72+1 pcs
<b>H11</b> Crystal flower 72+1 pcs	<b>H12</b> Socket assembly (Pre-assembled to wire of fixture body (B)) 16 pcs	<b>H13</b> Tube 1 pc		

**THIS MANUAL CONTAINS IMPORTANT SAFETY INFORMATION. PLEASE READ AND KEEP FOR FUTURE REFERENCE.**

# IMPORTANT SAFETY INFORMATION

- Please read and understand this entire manual before attempting to assemble, operate or install the product.
- Turn off electricity at main fuse box (or circuit breaker box) before beginning installation by removing fuse (or switching off circuit breaker).
- Be careful not to damage or cut the wire insulation (covering) during fixture installation. Do not permit wires to contact any surface having a sharp edge. To do so may damage or cut the wire insulation, which could cause serious injury or death from electric shock.
- All electrical connections must be in agreement with local codes, ordinances or the national electric code (NEC). Contact your municipal building department to learn about your local codes, permits and/or inspections. If you do not have electrical wiring experience, refer to a do-it-yourself wiring handbook or have your fixture installed by a qualified licensed electrician.
- Risk of fire – most dwellings built before 1985 have supply wire rated for 140°F/60°C. Consult a qualified electrician before installation.
- Do not exceed the recommended wattage. Refer to the re-lamping label on the light socket for maximum wattage.
- Do not replace a bulb when electrical outlet switch is turned to the “ON” position.
- Do not immerse your lamp in water; doing so will damage the wire.
- Keep materials that burn easily away from lighted bulbs.


## PREPARATION

- Before beginning assembly, installation or operation of product, make sure all parts are present. Compare parts with package contents list and diagram on previous page. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement parts.
- Tools required for assembly (not included): flathead screwdriver, phillips screwdriver, pliers, electrical tape, wire cutters, safety glasses, ladder, wire stripper.

## INSTALLATION


### 1 Preparing the mounting bracket

- Unscrew the two cap nuts (H7) from the support screws (long) (H2). Remove the mounting bracket (H1) from the canopy assembly (A), and keep the cap nuts (H7) for later use.
- Loosen the hex nuts (H3) on the support screws (long) (H2) and adjust the support screws (long) (H2) so that they extend long enough to protrude through the canopy of the canopy assembly (A). Then secure the support screws (long) (H2) in place using the hex nuts (H3).

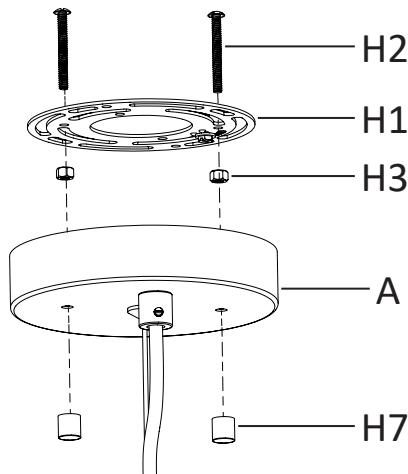

### 2 Installing the mounting bracket


- Fasten the mounting bracket (H1) onto the outlet box (not provided) using two outlet box screws (short) (H4).

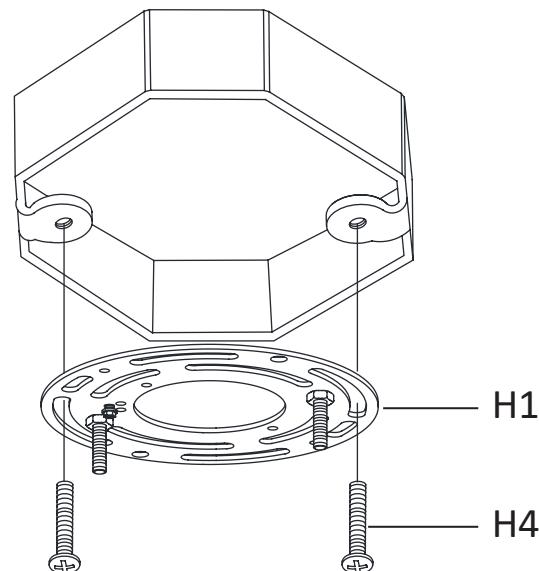

# INSTALLATION (continued)


## 3 Assembling the fixture body

- Press the wires of the socket assemblies (H12) into the hole of the fixture body (B) and tighten the socket assemblies (H12) into the fixture body (B) as shown in the diagram.
- Screw the tube (H13) onto the top of the fixture body (B).

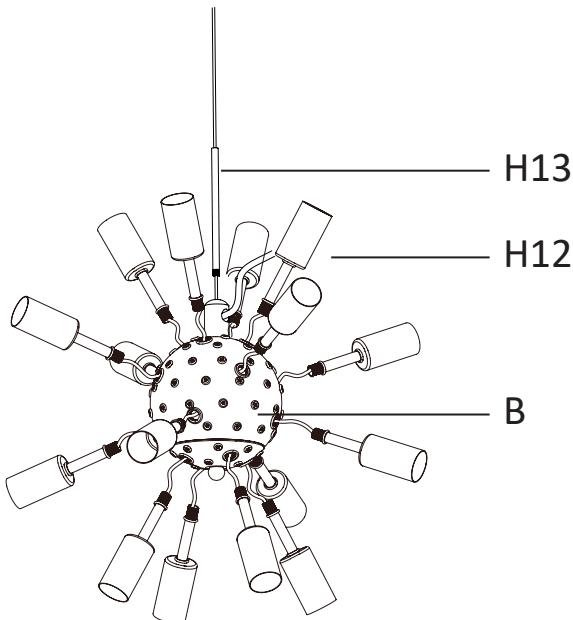


## 4 Adjusting the power cord

- Press the button under the canopy assembly (A), where the steel wire comes out to adjust the steel wires to the desired length. Release the button to hold the steel wires in position, as shown in the diagram.
- Loosen the plastic screw (H9) on the canopy assembly (A) by using a flat head screwdriver (not provided) and adjust the fixture wire to the desired length, then tighten the plastic screw (H9) back into the hole as shown in the diagram.

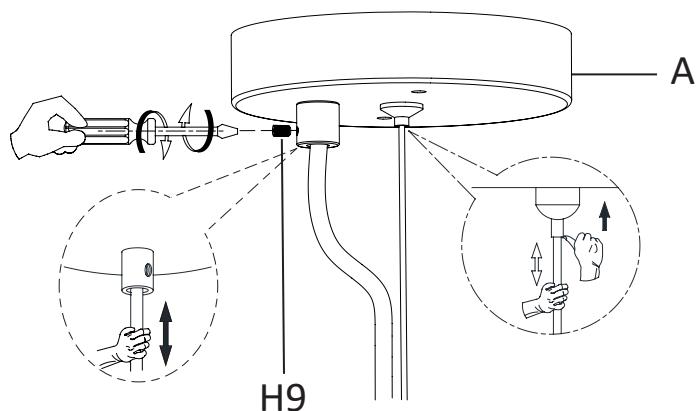

## 5 Making the electrical connections

- Strip 3/4 in. of insulation from the wire ends.
- Connect the live wire (labeled and marked "L") from the fixture to the black wire from the outlet box, then connect the neutral wire (labeled and marked "N") from the fixture to the white wire from the outlet box.
- Connect the bare copper ground wire from the canopy assembly (A) to the green ground wire from the fixture (labeled and marked "G") and the ground wire from the outlet box. The bare copper wire from the canopy must loop one turn the head of the green ground screw (H5) on the mounting bracket (H1) before it is connected to the ground conductor of the supply circuit.
- Cover the wires with wire connectors (H6). Tape the wire connectors (H6) and wires together, and carefully position all wires inside the outlet box.

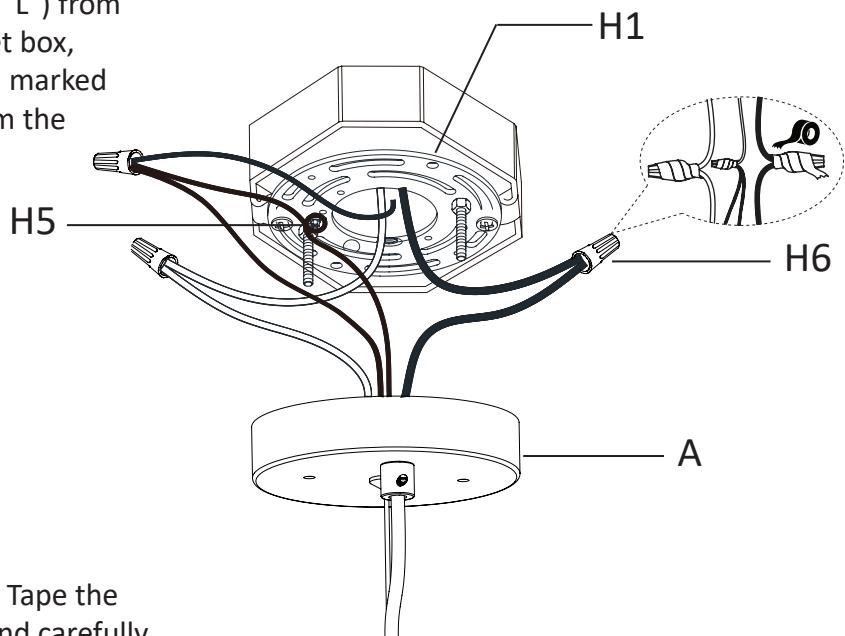


**Note:** Do not let go of the canopy assembly (A) before the canopy assembly (A) installed on the mounting bracket (H1).

# INSTALLATION (continued)

## 6 Installing the canopy assembly to the outlet box

- Place the canopy assembly (A) over the outlet box, and ensure the heads of the support screws (long) (H2) come through the holes of the canopy assembly (A).
- Tighten the cap nuts (H7) onto the protruding support screws (long) (H2) on the mounting bracket (H1) until the canopy assembly (A) is held firmly against the ceiling.


**Note:** Do not let go of the canopy assembly (A) before the canopy assembly (A) installed on the mounting bracket (H1).

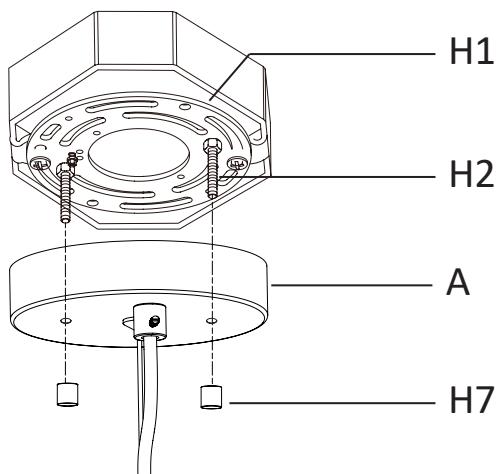

## 8 Installing the light bulb


- Install the light bulbs (not provided) into the socket. Use sixteen **MAX 40 W candelabra base (E12) type "B" bulbs** (recommended).

**Note:** You can also use sixteen **MAX 9W candelabra base (E12) self-ballasted LED bulb**. Do not exceed the recommended wattage.

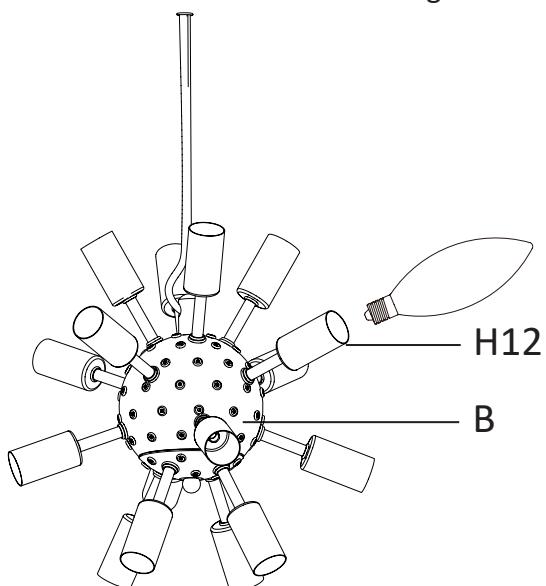


## 7 Adjusting the wire clip

- Adjust the wire clip (H8) onto the steel wire as shown in the diagram.

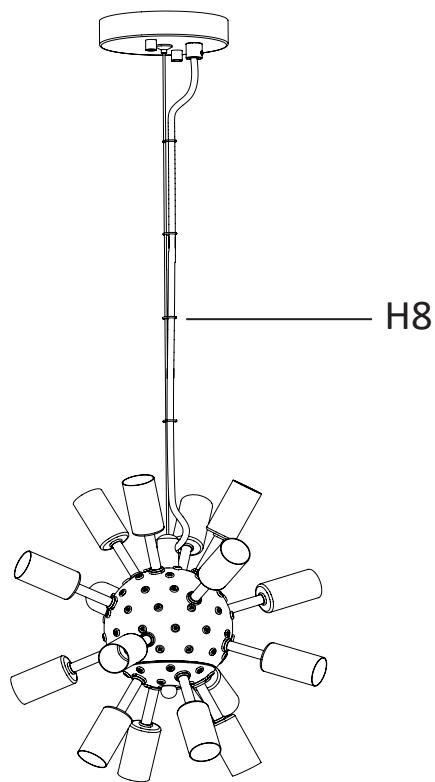

## 9 Assembling the crystal flower

- Screw the short screw of the nipple (H10) into the crystal flower (H11).
- Screw the long screw of the nipples (H10) into the fixture body (B).

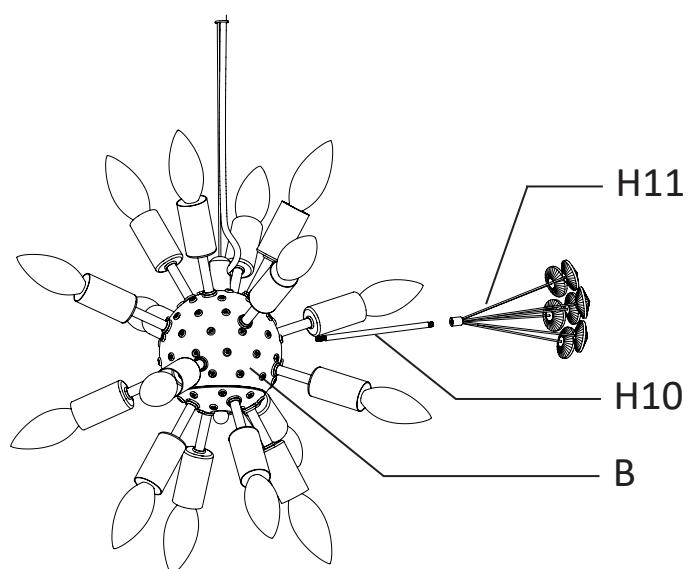

---

## CLEANING

- Do not use any cleaners with chemicals, solvents, or harsh abrasives. Use only a dry, soft cloth to dust or wipe carefully.
- To clean the fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box. Use a dry or slightly dampened, clean cloth to wipe the exterior surface of the fixture.

---

## TROUBLESHOOTING

- The light does not come on at all:
  - a) Check whether the bulbs were burned out.
  - b) Make sure the wall switch is on.
  - c) Make sure the wiring is correct.
  - d) Make sure the circuit breaker is set in the “ON” position.
- Fuse blows or circuit trips when light is turned on.
  - a) Check for crossed wires, ensure wiring is correct.