

Features

- Single-function showerhead with Katalyst[™] Spray technology.
- Single-function showerhead with 66 nozzle 5-15/16" (15.1 cm) diameter sprayface.
- Optimized sprayface for maximum performance.
- MasterClean[™] spray nozzles to prohibit mineral build-up for easy cleaning.
- 2.5 gallons (9.5 L) per minute flow rate.

Installation

• 1/2" - 14 NPT connection.

Recommended Accessories

K-7397 Shower Arm and Flange



Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|---------------|------|--------------------------|
| | CP | Polished Chrome |
| | SN | Vibrant® Polished Nickel |
| in the second | BN | Vibrant® Brushed Nickel |
| | BV | Vibrant® Brushed Bronze |
| | 2BZ | Oil-Rubbed Bronze |




Bancroft®

Single-function Showerhead K-10590-AK

KOHLER. Faucets

Bancroft® Single-function Showerhead K-10590-AK

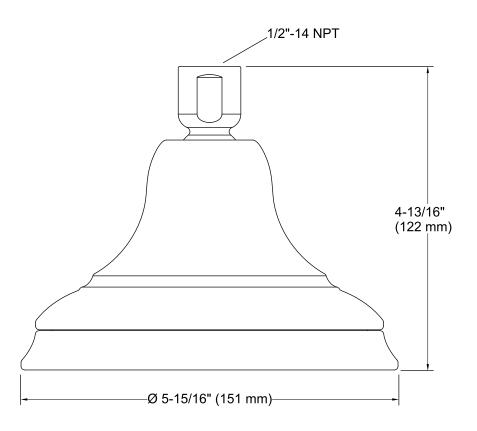

Technical Information

All product dimensions are nominal.

Showerhead:

Rated maximum flow: 2.5 gal/min (9.5 l/min)

Notes

Install this product according to the installation guide.

