



A KOHLER COMPANY

**OC-S-63**

**63" ADA Shower with Backer Boards  
62070106**



**Features**

- Modular design allows it to be moved around corners and through doorways with ease.
- Durable swirl gloss finish.
- Wall surround includes backer boards for future grab bar installation.
- 1/2" (13 mm) threshold.
- 63-1/2" (1613 mm) x 40-5/8" (1032 mm) x 73-1/4" (1861 mm) rough-in, including flange.
- 63-1/4" (1607 mm) x 39-3/8" (1000 mm) x 72" (1829 mm) complete unit finished dimensions.

**Material**

- Compression molded from our exclusive Vikrell® material.

**Installation**

- Tongue-and-groove four piece modular design allows for easy snap together installation.
- Caulk required for proper installation.

**Components**

Product includes:

- 62055106 39" Shower End Wall Set with Backer Boards
- 62061100 63" Shower Base
- 62062106 63" Shower Back Wall with Backer Boards



**ADA**

**Codes/Standards**

- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662
- Greenguard UL 2818 - Gold
- ADA

**STERLING® Warranty - Fixtures Made of Solid Vikrell Material**

See website for detailed warranty information.

**Available Color/Finishes**

*Color tiles intended for reference only.*


Color	Code	Description
	0	White
	96	Biscuit

USA/Canada: 1-800-STERLING (1-800-783-7546)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.sterlingplumbing.com](http://www.sterlingplumbing.com).

11-13-2015 05:25

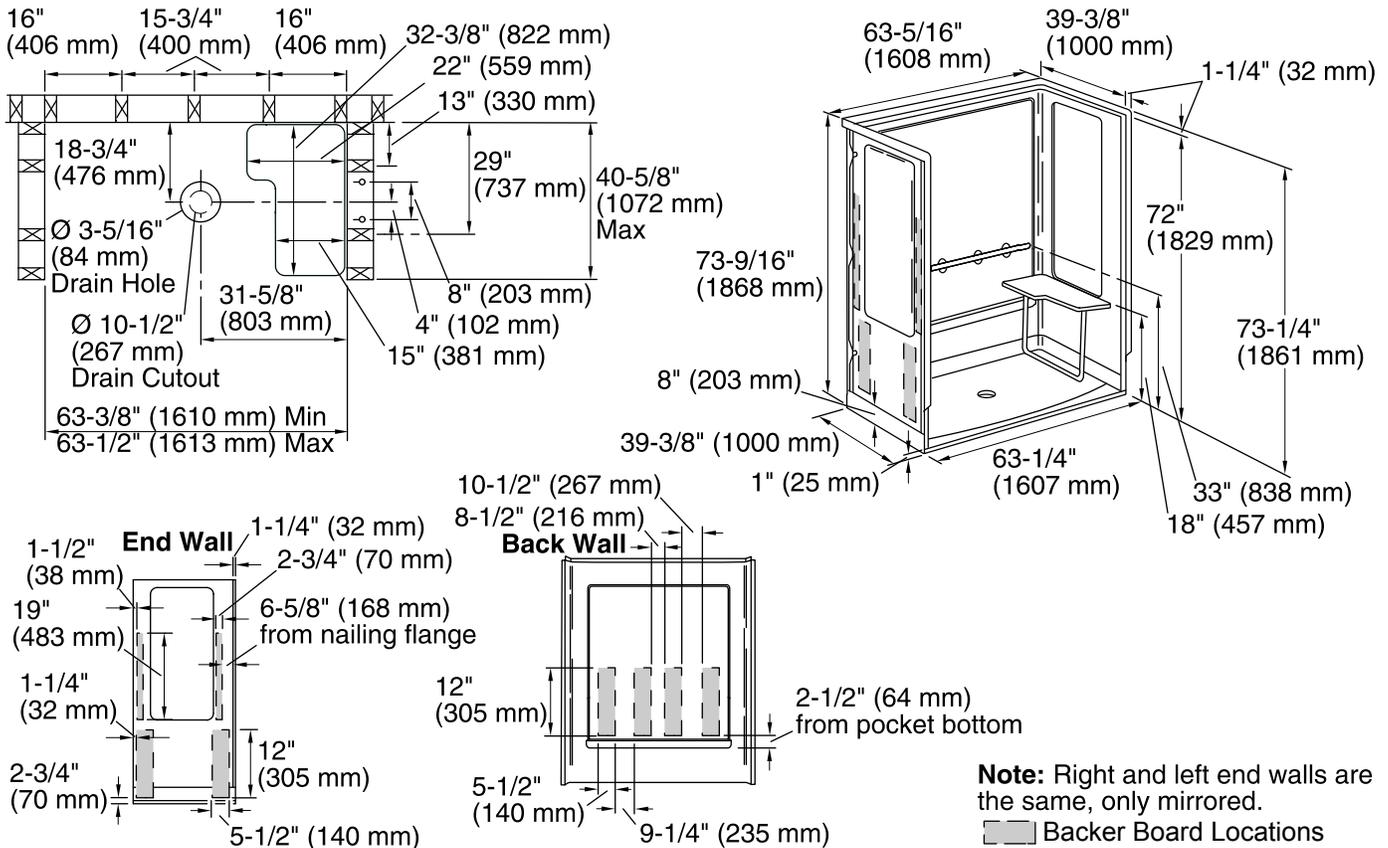

### Technical Information

All product dimensions are nominal.

Installation: 3-Wall Alcove

Drain location: Center

### Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

Install this product according to the installation guide.

Drain cutout in subfloor to be 10-1/2" (267 mm) per rough-in illustration as shown to allow the backside of the drain to sit below the subfloor surface.

Studs should be positioned as shown.

Backer boards and fasteners protrude beyond the back wall 1-1/2" (38 mm). If installing this product against wall board, 1-1/2" (38 mm) furring strips installed over the wall board are recommended. The stud pocket depth of 40-5/8" (1032 mm) will need to be increased by the combined thickness of the wall board and furring strips.

Attach grab bars at the specified backer board locations only.

1/2" minimum finished floor thickness required.