

ASSEMBLY INSTRUCTIONS



CAUTION

◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver



Flat blade screwdriver




Pliers




Wire strippers


HARDWARE INCLUDED




Fixture




Stem A



Iron Rack A




Iron Rack B



Decorative Screws




Screws




Phillips Screwdriver




Ball Nuts A




Stems (B~E)



Swivels



Ceiling Plate



Baseplate



Lanyards



Washers



Decorative Nuts



Monuting unit



Ball Nuts B




Mounting Screws



Wire Nuts

*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


EXPLODED PARTS

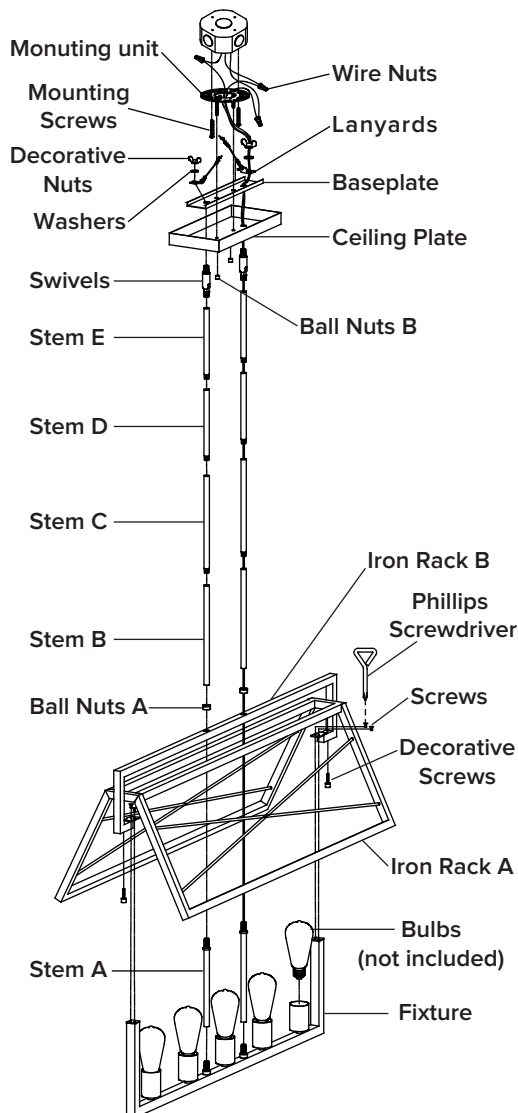

INSTALLATION


STEP 1

Weave the fixture wire and fixture ground wire through the **stem A**. Screw the **stem A** into the **fixture**.

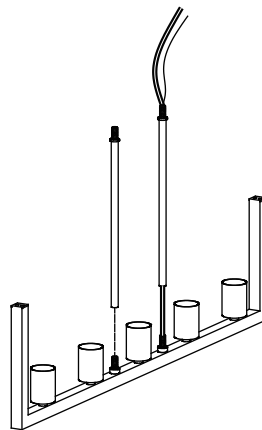


STEP 2

Attach the **iron rack B** onto **iron rack A** using **decorative screws**.

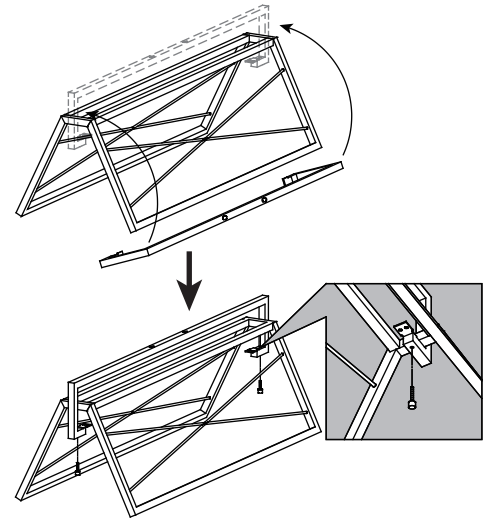

STEP 3


Weave the fixture wire and fixture ground wire through the **iron rack B** and **ball nuts A**. Attach the fixture onto **iron rack B** using **ball nuts A** and **screws**.

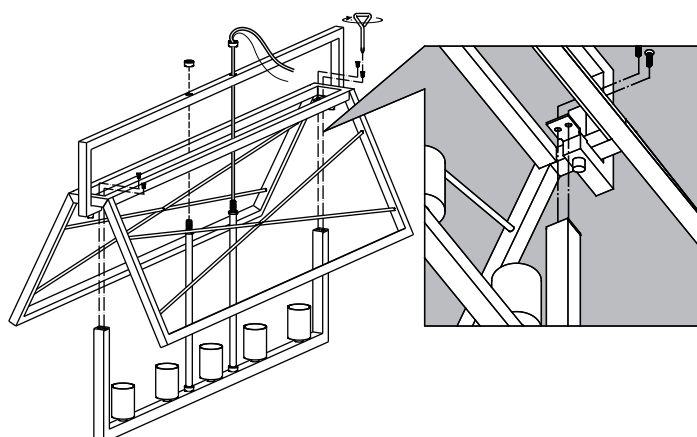

ASSEMBLY INSTRUCTIONS (INSTALLATION)


STEP 4

Unscrew the **ball nuts B** from the **mounting unit**. Use the **mounting screws** to attach the **mounting unit** to the junction box.




STEP 5

Disassemble the **swivels** under the **Ceiling Plate** by unscrewing **decorative nuts**. Keep the **Baseplate**, **washers** and **lanyards** for later use.

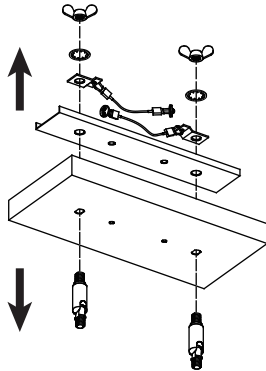

STEP 6


Weave the fixture wire and fixture ground wire through the **stems (B~E)** and **swivels**. Install **swivels** and **stems (B~E)** into the **fixture**. Install stems based on the desired length of the item on the fixture.

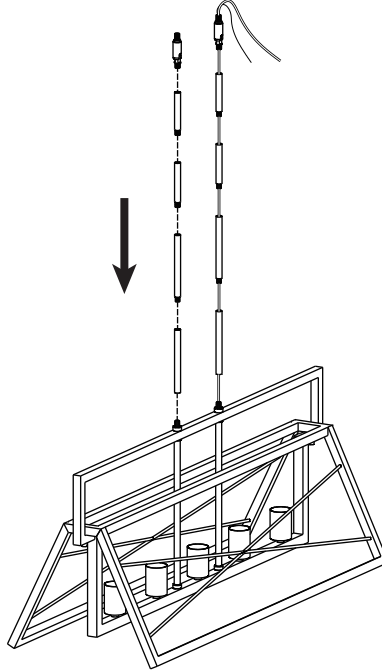

STEP 7




Weave the fixture wire and fixture ground wire through the **ceiling plate**, **baseplate**, **lanyards**, **washers** and **decorative nuts**.

Install **baseplate**, **lanyards** and **swivels** into the **ceiling plate**, and secure with **washer** and **decorative nuts**.

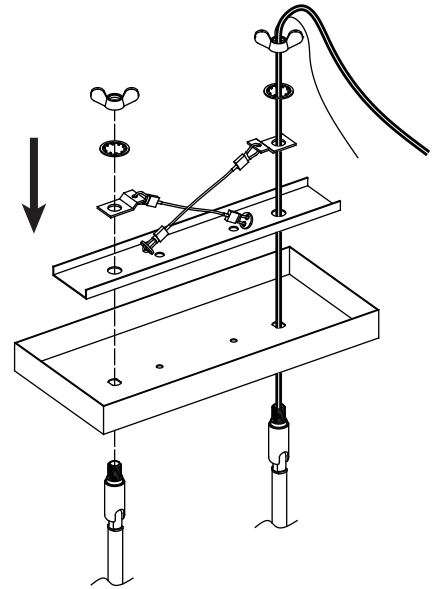


STEP 8

Attach the **lanyards** on to the **mounting unit**. Make the electrical connection from the junction box to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape.

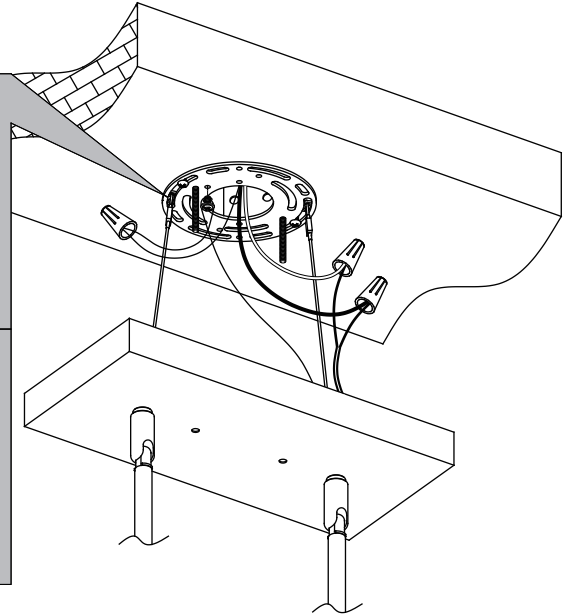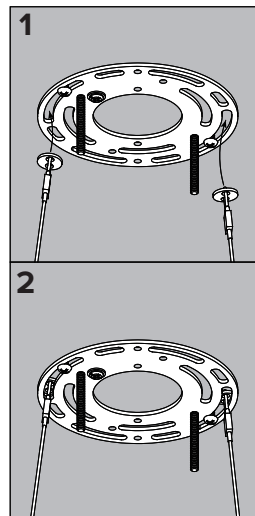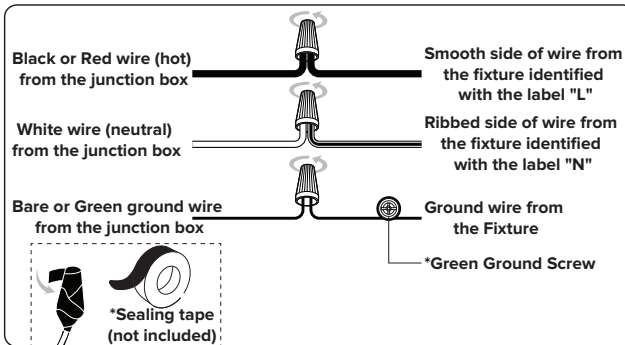

STEP 9

Secure the **canopy** to the **mounting unit** with the **ball nuts B**.

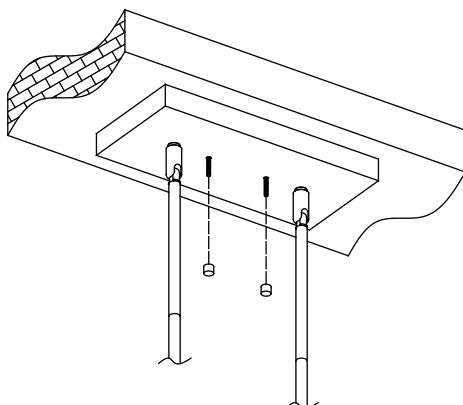

STEP 10

Install bulb (not included).

