# SPEAKMAN<sup>®</sup> S-2292

### Commercial Showerhead

### FEATURES:

- 1¾ in. brass shank
- Spray adjusting T-handle
- Brass ball swivel joint
- Flow control device reduces flow to 2.5 gpm (9.46 L/min) flow rate

#### FINISH:



#### COMPLIANCE:

• ASME A112.18.1/CSA B125.1 standard

#### WARRANTY:

• 5 year limited






Architect/Engineer Approval Space:

# **SPEAKMAN<sup>®</sup>**

DIMENSIONS: NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. Unless otherwise specified, all inlets and outlets are 1/2" female NPT threads.

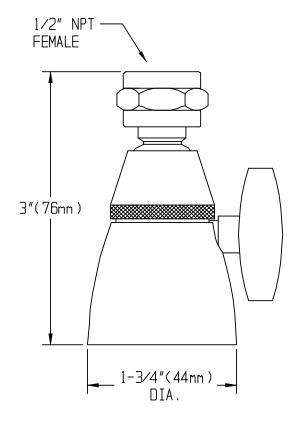

Architect/Engineer Approval Space: