


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

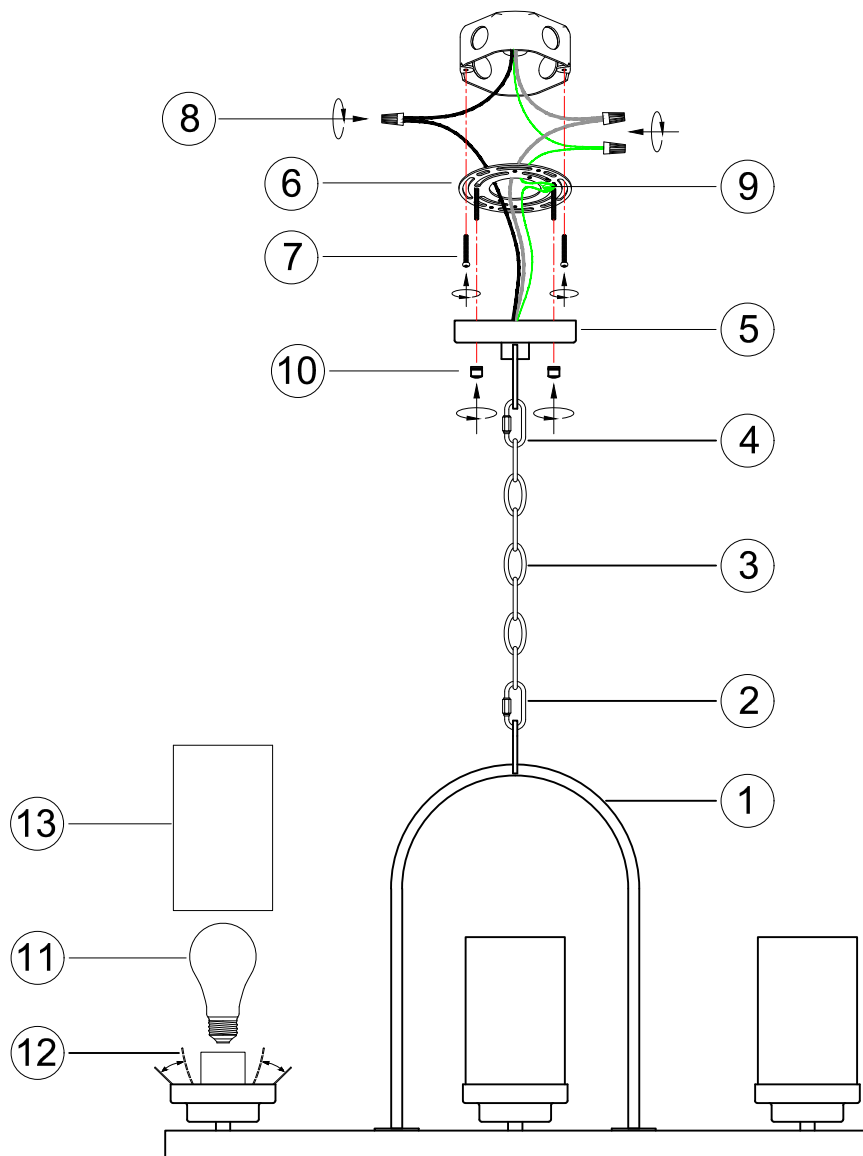

## Before You Begin:

- Ensure power is turned off at the circuit breaker before installation.
- Read all instructions carefully.
- Installation should be performed by a qualified electrician if you are unfamiliar with wiring.

## Step-by-Step Installation:

- 1-5. Use quick links and the chain of the desired length to connect the fixture frame and the canopy.
- 6-7. Secure the mounting plate to the junction box using the provided screws.
8. Remove the power cord from the junction box and connect it using connectors. Follow these steps:
  - Connect the white wire (-) from the fixture to the white wire (-) inside the junction box.
  - Connect the black wire (+) from the fixture to the black wire (+) inside the junction box.
9. Attach the fixture's ground wire to the mounting plate using the green grounding screw, then connect it to the box's ground wire using a connector. And carefully tuck all wires back into the electrical box.
10. Secure the canopy (5) to the junction box using the decorative finial (10).
11. Install the light source (Bulbs Not Included).
- 12-13. After tightening the spring clip, place the marble shade into the fixture base.

## Safety Instructions:

**To avoid fire, shock, and serious personal injury, follow all instructions carefully.**

1. Do not install or use the light fixture if any part is missing or damaged.
2. To avoid possible electrical shock be sure electricity is turned off at the main fuse or circuit breaker box before wiring.
3. Make certain no bare wires are exposed outside the wire connectors.
4. All wiring must conform to national and local electrical codes.
5. Follow the recommended instructions for the proper method of wiring your new light fixture. If you feel you do not have enough electrical wiring knowledge or experience, have your light fixture installed by a licensed electrician. Any electrical work not described in this manual should be performed by a licensed electrician.