




For V-Hook/Chain Mounting (purchase separately)

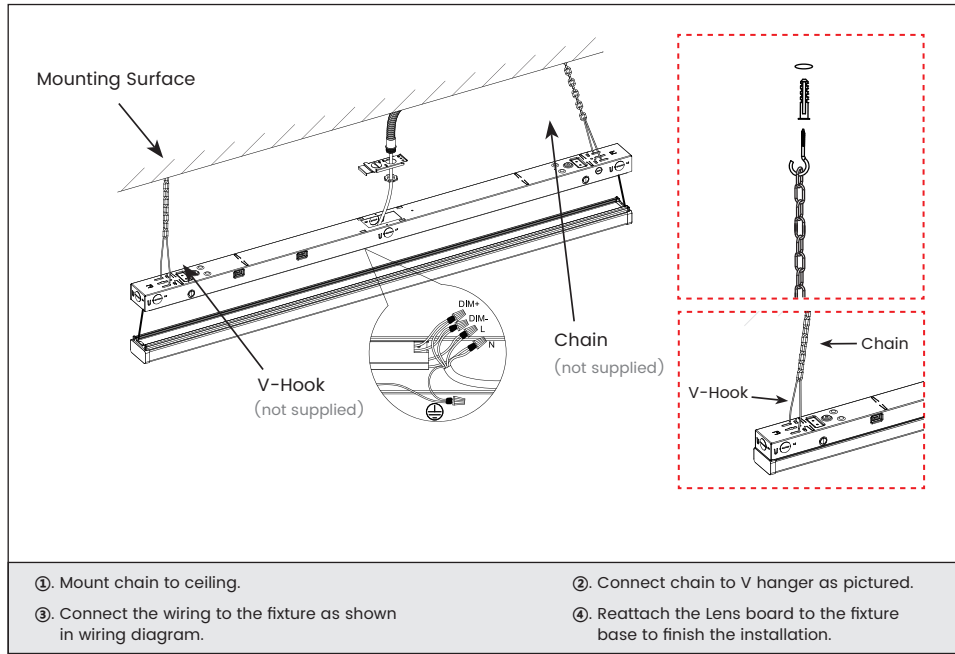

For V-Hook/Suspension Cables (purchase separately)

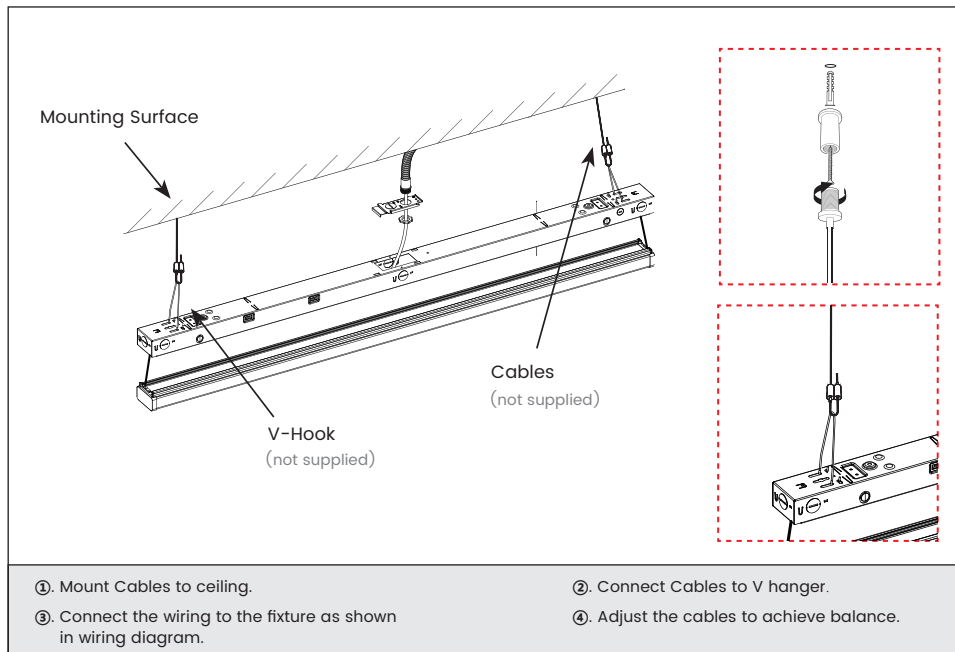

LED LINEAR STRIP LIGHT INSTALLATION INSTRUCTIONS

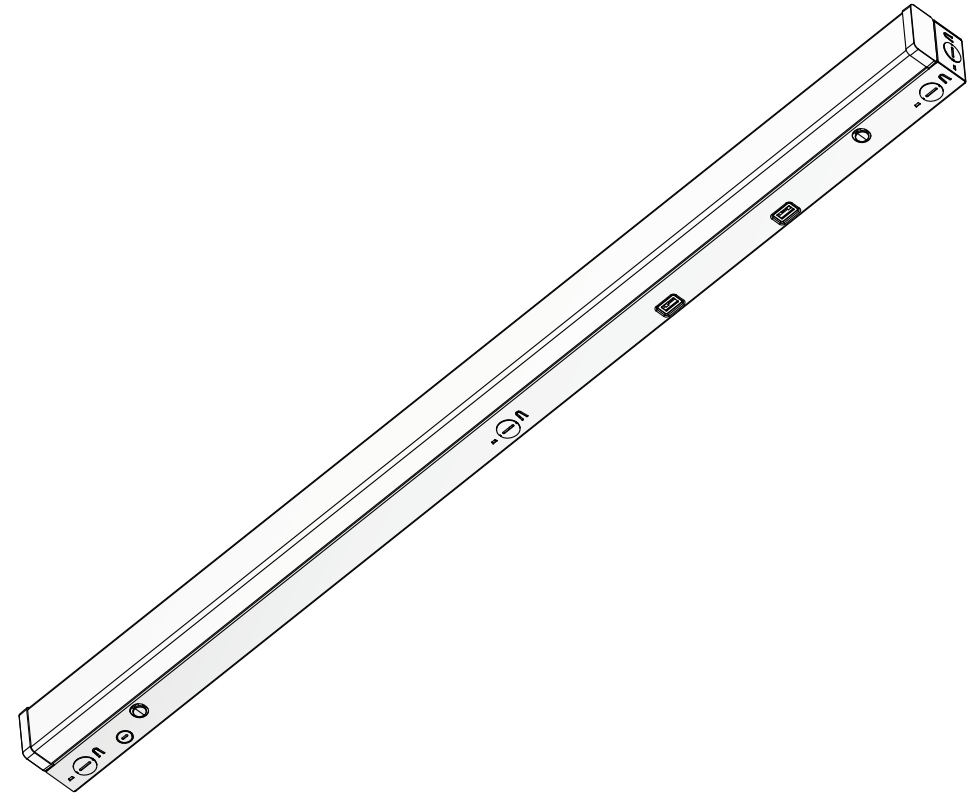

SAFETY INSTRUCTION :

Basic safety precautions should always be followed when installing,including the following:

- 1. Read instructions carefully before installing.
- 2. This Strip Light requires professional installation and maintenance.
- 3. Disconnect the power supply before installing or maintenance.
- 4. Make sure the wires have been properly connected before powering on the device.
- 5. Ensure the product has enough space for heat dissipation.
- 6. Ensure the luminaries are never covered by any heat insulation mat or slim layer material at anytime.
- 7. Suitable for damp locations.
- 8. Ambient Temperature: -20℃ to 45℃ , Aviod direct sunlight.
- 9. Storage Conditions: Cool & Dry conditions.

INSTALLATION PROCEDURE :

WARNING :

1. SWITCH OFF BEFORE INSTALLATION.

2. SWITCH ON ONLY AFTER COMPLETE INSTALLATION AND EXAMINATION OF THE CIRCUIT.

CAUTION :

MAKE SURE THAT THE MOUNTING SURFACE OR STRUCTURAL MEMBER USED FOR INSTALLATION CAN SUPPORT THE WEIGHT OF STRIP LIGHT.

Package Contents	WIRE DIAGRAM
X1 for 4FT & 8FT Cover Plates X2 for 4FT & 8FT Screw X3 for 4FT & 8FT Wire Cap X2 for 4FT X3 for 8FT Screw X2 for 4FT X3 for 8FT Plastic Anchor	FIXTURE Pink(Dim-) Purple(Dim+) Black(Line) White(Neutral) Green(Gnd) Dimming wire to 0-10V CCT & POWER SWITCH For the product with Slide Switch of CCT or power selection,please select the CCT or power needed before installation. (Ignore these steps if without the fuction) Slide switch for power selection Slide switch for CCT selection

For Surface Mounting

1

Remove the wiring cover from the light fixture by sliding it in the direction of the arrow.

2

Feed supply wires through Wire Access Hole. Secure the fixture to the ceiling with the provided plastic sleeve and screws.

Attach both Cover Plates to the Fixture Housing by sliding in the direction of arrows.

3

4

Reattach the Lens board to the fixture base to finish the installation.