

INSTALLATION INSTRUCTIONS

VOLT® LOW VOLTAGE LANDSCAPE LIGHTING

ITEM: AZPL-PLKIT2

1-813-978-3700 • Mon-Fri 8am-8pm • Sat-Sun 10am - 6pm (EST)

**IMPORTANT: PLEASE READ BEFORE INSTALLATION**

This fixture is intended for installation in accordance with local codes and the National Electric Code (NEC). Failure to adhere to these codes and instructions may result in serious injury, property damage and void the warranty.

These instructions do not intend to cover all variations in installation, operation maintenance or mounting situation.

1. Make sure that the power is turned OFF before installing or servicing this fixture.
2. This fixture is perfect for placing in water fountains, water falls, ponds, pools, etc.
3. This fixture is intended to be used only with a power supply (transformer) rated maximum of 300 watts (25 AMPS) at 12 volts ~ 22 volts.
4. Underground Low Energy Cable must not be buried over 6" (15.2 cm) in order to connect to the main low voltage cable.
5. Wiring connections must be made with wire connectors that is suitable for outdoor use.
6. Position the wire connector so that it is located within 6 inches (15.2 cm) from a building structure, a luminaire, or fitting.

IMPORTANT SAFETY INFORMATION**LIT FIXTURE IS HOT!**

WARNING – To reduce the risk of FIRE OR INJURY TO PERSONS.


1. Turn off/unplug and allow to cool before reducing lamp.
2. Lamp gets HOT quickly!
3. Do not touch the hot lens, guard or cowl.
4. Keep lamp away from materials that may burn.
5. Do not touch lamp at any time.
6. Use a soft cloth.
7. Oil from skin may damage lamp.

SAVE THESE INSTRUCTIONS


PACKAGE CONTENTS

- A. (1) Pagoda Top
- B. (1) Stem
- C. (1) G4 Bulb
- D. (1) Stake

PRODUCT DIMENSIONS

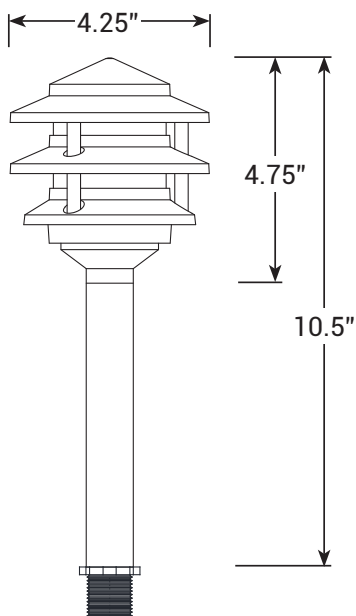


1 REMOVE THE TOP

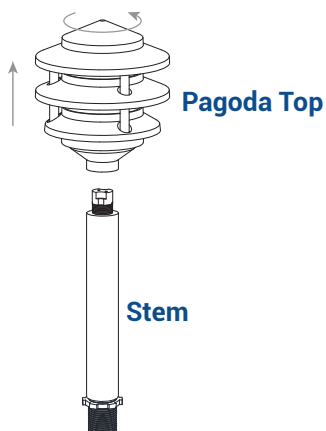

Twist the pagoda top and remove it from the stem.

2 INSTALL G4 BULB




Insert G4 bulb with correct wattage and type marked on fixture label.

CAUTION: Do not exceed maximum wattage marked on luminaire label.


NOTE: DO NOT touch G4 bulb with bare hands. Use soft cloth to handle the bulb.

3 INSTALL THE TOP

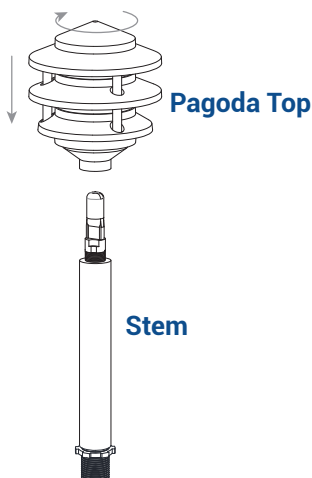

Thread the pagoda top back onto the stem.


4 INSTALL STAKE

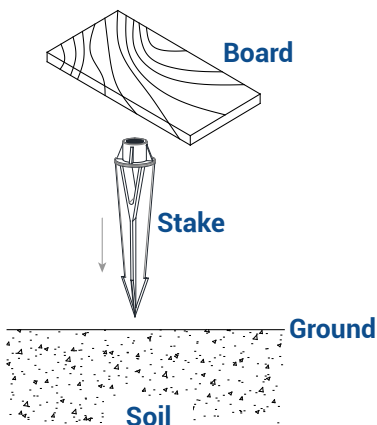

Determine your desired location for mounting the transformer. Hammer the stake into the ground until flange of stake is flush to grade. To avoid damage to the stake, place a board on top of the stake while hammering.


Note: If the ground is hard and the stake is difficult to install, make a crosscut in the ground using a flat shovel.

5 INSTALL STEM TO STAKE

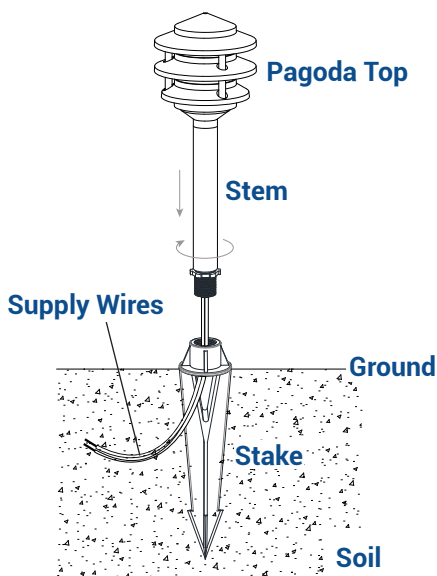

Pass supply wires through the center of the stake and thread the stem onto the stake. Hand tighten.

6 WIRE CONNECTIONS

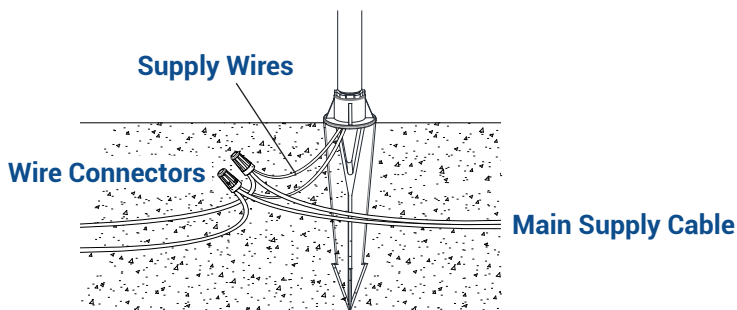

Strip two leads from fixture supply wires. Using two UL listed wire connectors (not provided), connect leads from fixture supply wires to main supply cable leads.

INSTALL/REPLACE G4 BULB

Please refer Step 1 - Step 2 to expose the G4 bulb and replace it with correct wattage and type marked on fixture label. Then reinstall the pagoda top.

IMPORTANT: G4 bulb must be protected from moisture and dust at all times. Always re-install pagoda top when moved.



1-813-978-3700 • Mon-Fri 8am-8pm • Sat-Sun 10am - 6pm (EST)

Specifications and product details subject to change without notice.
© Copyright 2024, VOLT® Lighting, Lutz FL USA 33549 • All rights reserved.
customersupport@voltlighting.com • www.voltlighting.com