



# 15" Marvel Clear Ice Machine with Arctic White Illuminice™ Lighting

Model # ML15CL & ML15CP

## Performance

- The quietest ice machine you can buy
- New energy-saving options conserve water and energy
- Engineered to consistently produce pure, clear ice with unrivaled clarity, immediate cooling and slower melt
- Its uniform size and compact density prove to be the optimal shape to provide faster cooling, while taking up less space in your glass
- Produces up to 39 pounds of clear ice daily, the equivalent of nearly eight convenience-store bags of ice
- Streamlined componentry and single-connection water fitting for simple installation

## Storage Capabilities

- Large-capacity bin stores 35 pounds of clear ice, while preserving quality and assuring fresh ice production
- Easy-to-clean, hygienic interior surface

## Touchpad Controls

- Marvel Intuit™ Integrated Controls feature all-new settings for ultimate programmability
- Eco Ice™ mode moderates ice production to conservative usage, saving 25% water (91 gallons monthly) and 25% energy (\$45 annually)\*\*
- Delay Start/Vacation option automatically postpones operation by 1/4/6/8 (hour or day) intervals, preventing wasteful water use
- Audible alerts and programmed cleaning reminders

## Aesthetics

- New Illuminice™ feature projects arctic white LED light through clear ice for a dazzling illumination effect
- First-ever glass door model with white interior adds drama to entertaining at home
- Easy-to-install panel-ready option includes soft-close integrated hinge
- Finish options: stainless steel, black or overlay panel

## Additional Convenience

- Close Door Assist System™ prevents energy loss by automatically drawing door to a gentle close
- Black toe kick adjustable to 4" with leveling legs
- 1-year parts and labor warranty, 5-year sealed system parts warranty (see owner's guide for details)




## Ordering Options

Gravity Drain Applications	
Solid Stainless Steel Door, Right Hinge	ML15CLS1RS
Solid Stainless Steel Door, Left Hinge	ML15CLS1LS
Stainless Frame, Glass Door, Right Hinge	ML15CLG1RS
Stainless Frame, Glass Door, Left Hinge	ML15CLG1LS
Solid Smooth Black Door, Right Hinge	ML15CLS1RB
Solid Smooth Black Door, Left Hinge	ML15CLS1LB
Panel-Ready Solid Overlay Door, Integrated Right Hinge*	ML15CLP2RP
Panel-Ready Solid Overlay Door, Integrated Left Hinge*	ML15CLP2LP
Factory Installed Pump	
Solid Stainless Door, Right Hinge	ML15CPS1RS
Solid Stainless Door, Left Hinge	ML15CPS1LS
Stainless Frame, Glass Door, Right Hinge	ML15CPG1RS
Stainless Frame, Glass Door, Left Hinge	ML15CPG1LS
Solid Smooth Black Door, Right Hinge	ML15CPS1RB
Solid Smooth Black Door, Left Hinge	ML15CPS1LB
Panel-Ready Solid Overlay Door, Integrated Right Hinge*	ML15CPP2RP
Panel-Ready Solid Overlay Door, Integrated Left Hinge*	ML15CPP2LP


\*Easy installation! No panel kit required. Consult your cabinet maker for overlay panel and handle options.



## Finish Options

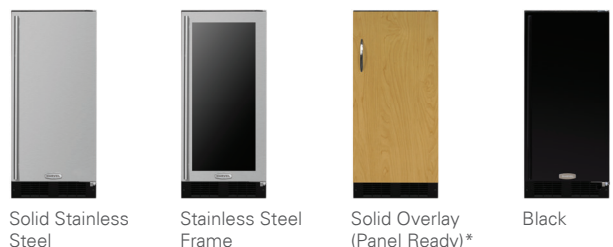

## Product Dimensions

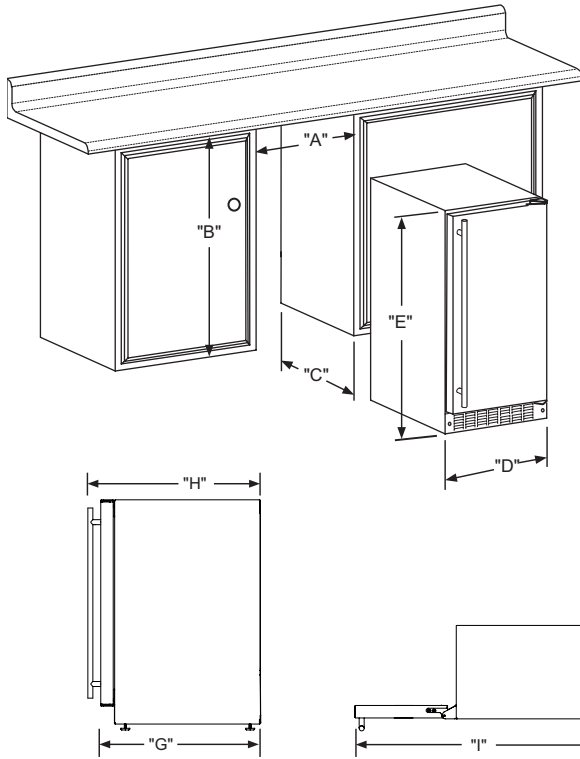

## Rough-In Dimensions

A. Rough-In Width	15"
B. Rough-In Height	34" to 35"
C. Rough-In Depth	24"


## Product Dimensions

D. Width	14 7/8"	
E. Height	33 3/4" to 34 3/4"	
G. Depth to Front of Door	Solid Door	23 5/8"
	Overlay Door	22 15/16"
H. Depth to Handle	25 9/16' (Stainless Steel)	
I. Depth with door at 90°	Solid Door	37 13/32"
	Overlay Door	38 5/8"

## Product Features


Interior Cabinet Finish	White
Capacity	35 lbs of Ice Storage
Shelving System	NA
Shelf Fronts	NA
Other Storage	Ice Bin
Interior Lighting	Illuminice™ White LED
Toe Grill Finish	Black
Hinge	Classic Hinge
Handle	Slim Designer Handle (Panel Overlay Does Not Include Handle)
Control Type	Intuit™
Temperature Range	NA
Lock	No
Electrical Requirements	120V / 60Hz / 15A
Length of Power Cord	6'
Shipping Weight	127 lbs
Finishes	Stainless Steel, Overlay, Black
Vacation Mode	Yes
Agency Approvals	CSA

## Panel Overlay Dimensions (Frame Door)

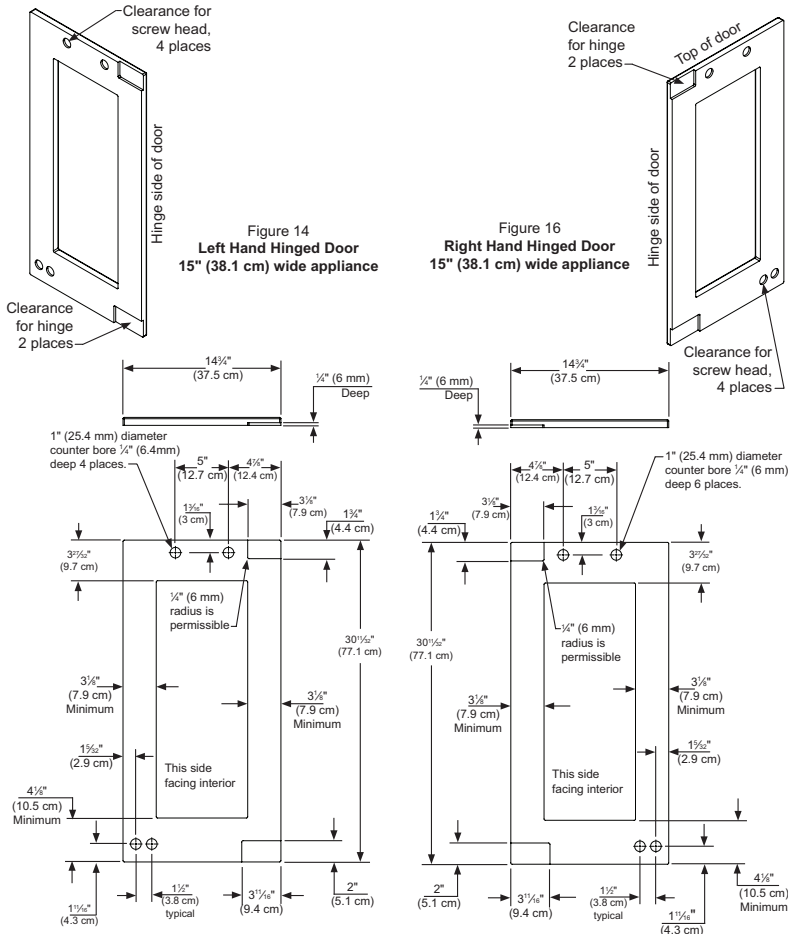


For comprehensive installation instructions, please visit [www.marvelrefrigeration.com](http://www.marvelrefrigeration.com) to access the owner's guide.


Panel Overlay Dimensions (Solid Door)

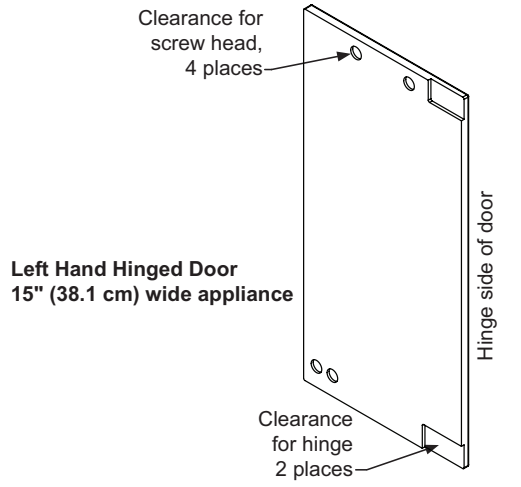


**Left Hand Hinged Door**  
15" (38.1 cm) wide appliance

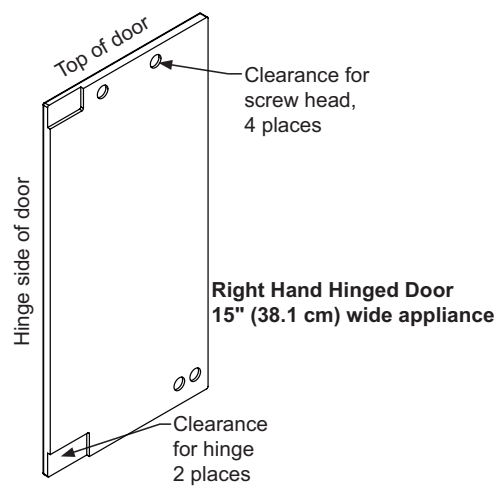

**Right Hand Hinged Door**  
15" (38.1 cm) wide appliance

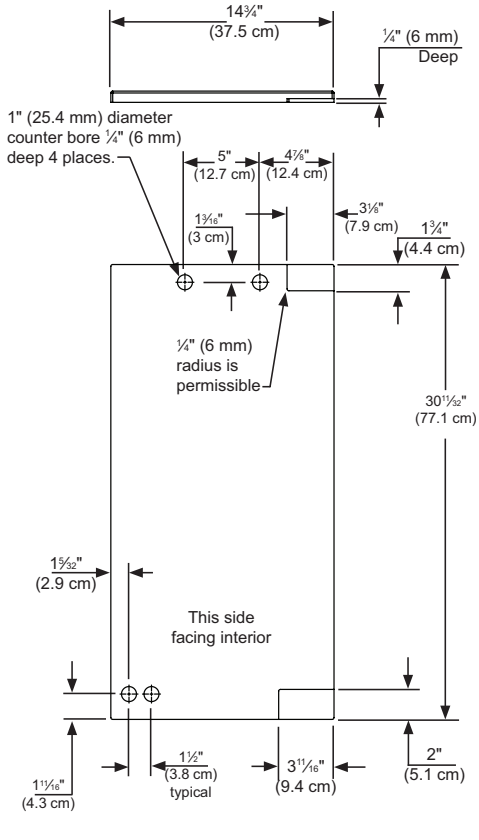

**Left Hand Hinged Door**  
15" (38.1 cm) wide appliance

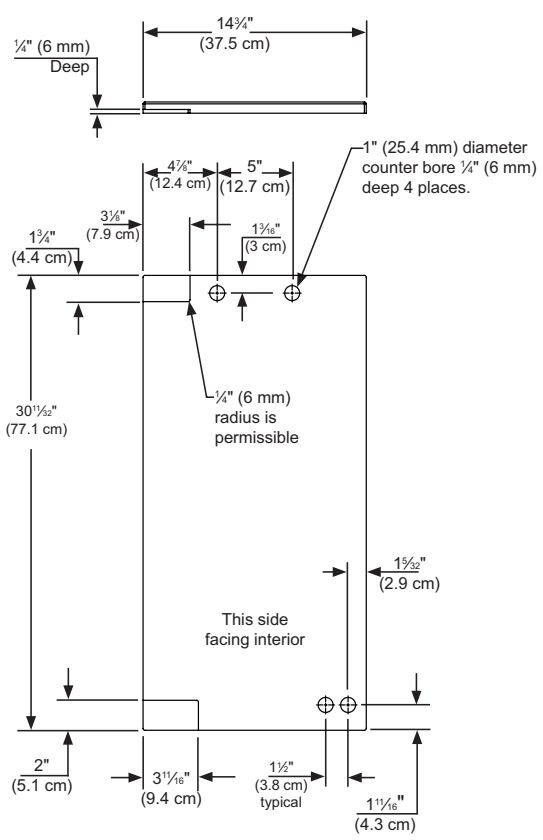

**Right Hand Hinged Door**  
15" (38.1 cm) wide appliance

For comprehensive installation instructions, please visit [www.marvelrefrigeration.com](http://www.marvelrefrigeration.com) to access the owner's guide.