

Assembly Instruction Sheet #IS-1094W11-3 For Style 1094W11-3

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Light Source: (3) G9 40W Maximum(Not Include).

Estimated Assembly Time: 15-30 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

⚠ Warnings and Cautions


Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture.


We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents

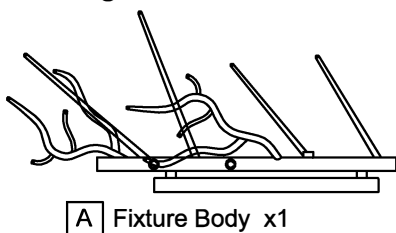

A Fixture Body x1



B Glass drop x24

Hardware Contents

PART	DESCRIPTION	QUANTITY
AA	Cap nut	2pcs
BB	Wire nut	2pcs
CC	Outlet Box Screw	2pcs
DD	Mounting Screw	2pcs
EE	Mounting bracket	1pcs

AA



BB




CC



DD



EE



STEP 2 – Attach Mounting bracket to Outlet Box

A. Pass the supply wires through the Mounting bracket (EE).

Attach the Mounting bracket (EE) to the Outlet Box

with the head of the Green Ground Screw facing you.

Secure it with Outlet Box

Screws .

Tighten until snug.

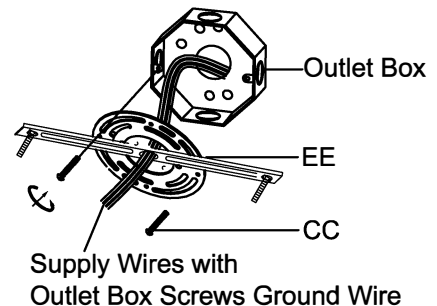


Figure 2

STEP 3 – Fit Backplate to Mounting bracket Assembly

A. Fit the backplate to Mounting Screws (DD) and secure

with Cap nut (AA). Note: The backplate should be snug against the ceiling and the Cap nut (AA).

If not, adjust the length of the

Mounting Screws (DD) by

unscrewing the Hex Nut

and Lock Washer and

then screwing Mounting

Screws (DD) in or

out of the

Mounting bracket

(EE) until the

correct length is achieved.

Once the backplate is

secure, remove the Cap nut

(AA) and backplate

and proceed to Step 4

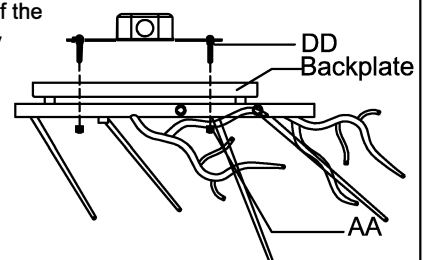


Figure 3

STEP 1 – Attach Mounting Screws, Lock Washers and Hex Nuts to Mounting bracket.

A. Line up a set of holes on the

Mounting bracket (EE)

and Holes on the Backplate.

Thread Mounting Screws (DD)

into the holes on the

Mounting bracket (EE).

Pass Lock

Washers and

thread Hex

Nuts onto the

Mounting

Screws (DD) .

Hand tighten

until snug.

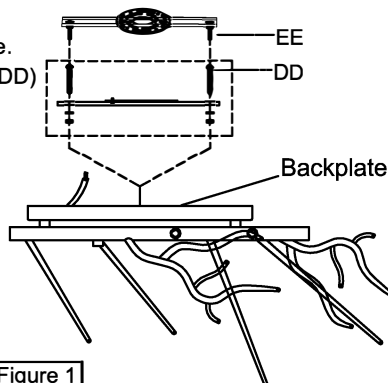


Figure 1

STEP 4 - Wire Connections

- A. Use standard wire connectors to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

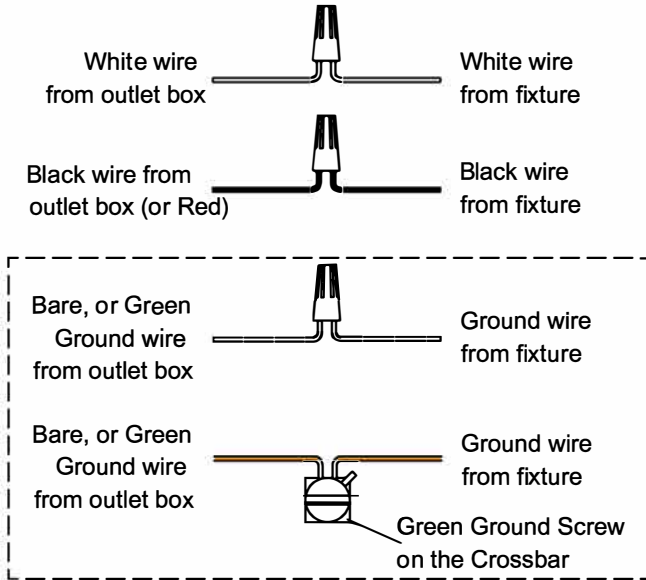


Figure 4

STEP 5 - Install Backplate to Ceiling

- A. Carefully tuck all wires into the outlet box and position the backplate of the Fixture Body (A) over the outlet box. Align the holes in the backplate with the Mounting Screws (DD). Secure with Cap nut (AA) and hand tighten until snug.


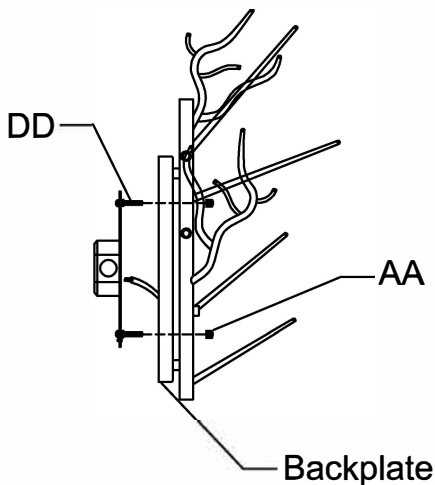


Figure 5

STEP 6 - Install Glass drop and Bulbs.

- A. Install bulbs onto sockets and push snug into place.
- B. Please put the Glass drop (B) to the Fixture Body (A).

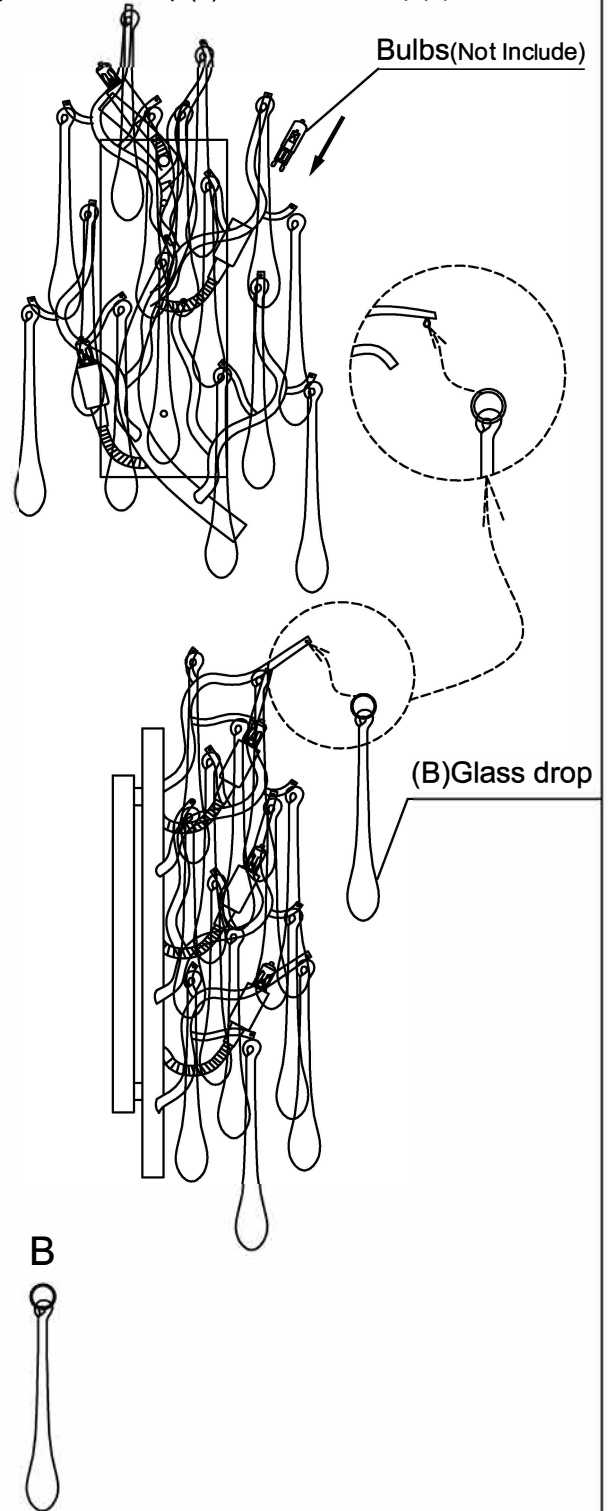

24PCS

Figure 6