

**AXIS™ 32" SQUARE SHOWER
BASE AND DRAIN**

□ **3232S-ST3 SQUARE SHOWER BASE**

Product Features:

- Durable acrylic construction with fiberglass reinforcement for lasting beauty
- Accessible, low, single threshold design for easy entry and exit
- Center drain location
- Shower drain with stainless steel drain cover included
- Integral water retention flanges to prevent behind-the-wall leaks and makes tiling easier
- Limited Lifetime Warranty



Nominal Dimensions:

32-3/4" x 32-3/4" x 3-1/4"
(832 x 832 x 82mm)

Compliance Certifications -

Meets or Exceeds the Following Specifications:


- CSA B45.5 / IAPMO Z124

SEE REVERSE SIDE FOR ROUGHING-IN
DIMENSIONS AND PRODUCT SPECIFICATIONS

NOTES:

**REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH SHOWER
BASE FOR ADDITIONAL INFORMATION.**

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard CSA B45.5 / IAPMO Z124. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

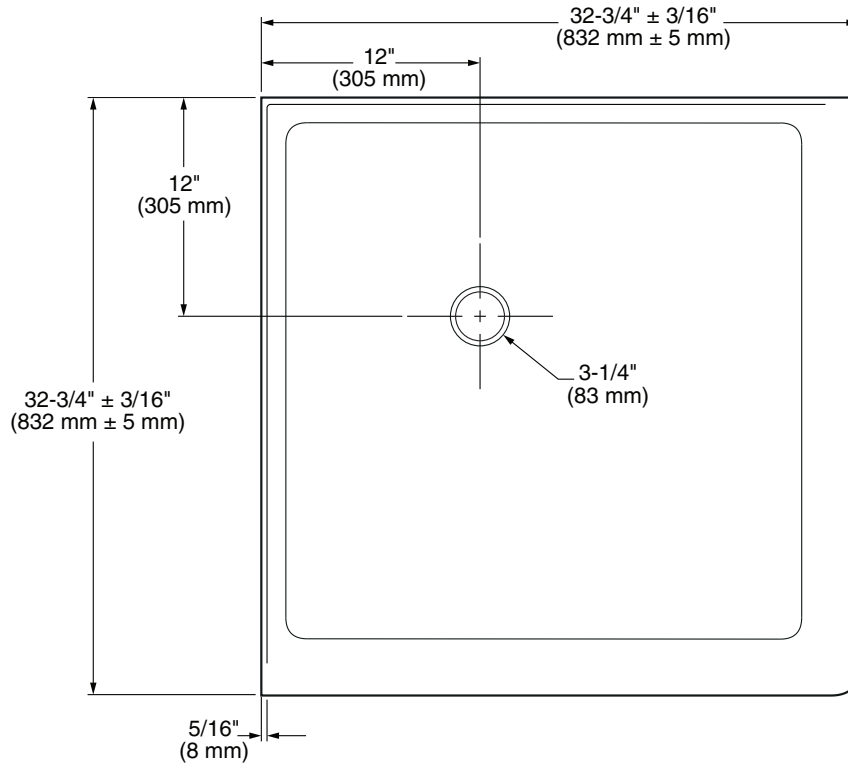

GENERAL SPECIFICATIONS FOR 3232S-ST3 SHOWER BASE

INSTALLED SIZE _____ $32\frac{3}{4} \times 32\frac{3}{4} \times 3\frac{1}{4}$ IN.
 (832mm x 832mm x 82mm)
 WEIGHT _____ 30 LBS. (14 Kg.)
 WEIGHT w/WATER _____ 80 LBS. (36 Kg.)
 SHOWER WELL AT SUMP _____ $26\frac{5}{8} \times 26\frac{5}{8}$ IN. (676mm x 676mm)
 SHOWER WELL AT RIM _____ $28\frac{1}{4} \times 28\frac{1}{4}$ IN. (718mm x 718mm)
 FLOOR LOADING _____ 10 LBS./SQ. FT. (52 Kgs/Sq. m.)
 (PROJECTED AREA)