

**AXIS™ 38" CURVED SHOWER
BASE AND DRAIN**

❑ **3838A-ST3 CURVED SHOWER BASE**

Product Features:

- Durable acrylic construction with fiberglass reinforcement for lasting beauty
- Accessible, low, single threshold design for easy entry and exit
- Curved design for more comfortable floor space
- Center drain location
- Shower drain with stainless steel drain cover included
- Integral water retention flanges to prevent behind-the-wall leaks and makes tiling easier
- Limited Lifetime Warranty



Nominal Dimensions:

38" x 38" x 3-1/4"
(965 x 965 x 82mm)

Compliance Certifications -

Meets or Exceeds the Following Specifications:


- CSA B45.5 / IAPMO Z124

SEE REVERSE SIDE FOR ROUGHING-IN
DIMENSIONS AND PRODUCT SPECIFICATIONS

NOTES:

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH SHOWER
BASE FOR ADDITIONAL INFORMATION.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the
range of tolerances established by ANSI Standard CSA B45.5 / IAPMO Z124.
These measurements are subject to change or cancellation. No responsibility
is assumed for use of superseded or voided pages.

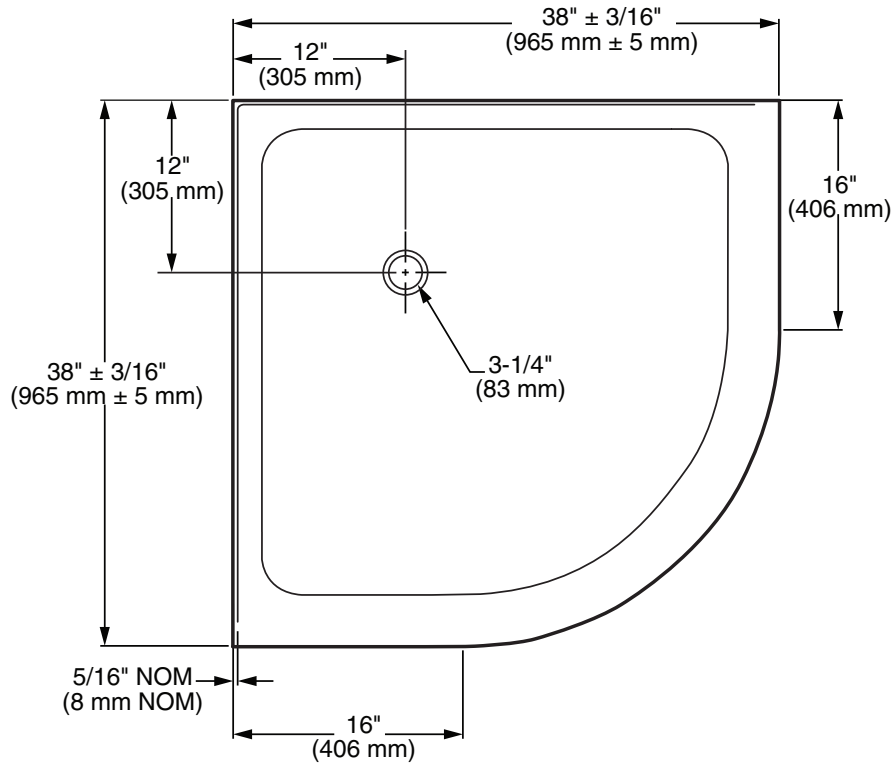

GENERAL SPECIFICATIONS FOR 3838A-ST3 SHOWER BASE

INSTALLED SIZE	_____	38 x 38 x 3-1/4 IN.
		(965mm x 965mm x 82mm)
WEIGHT	_____	35.5 LBS. (16 Kg.)
WEIGHT w/WATER	_____	95 LBS. (43 Kg.)
SHOWER WELL AT SUMP	_____	30-7/8 x 30-7/8 IN. (784mm x 784mm)
SHOWER WELL AT RIM	_____	32-3/8 x 32-3/8 IN. (822mm x 822mm)
FLOOR LOADING	_____	10 LBS./SQ. FT. (50 Kgs/Sq. m.)
		(PROJECTED AREA)