


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

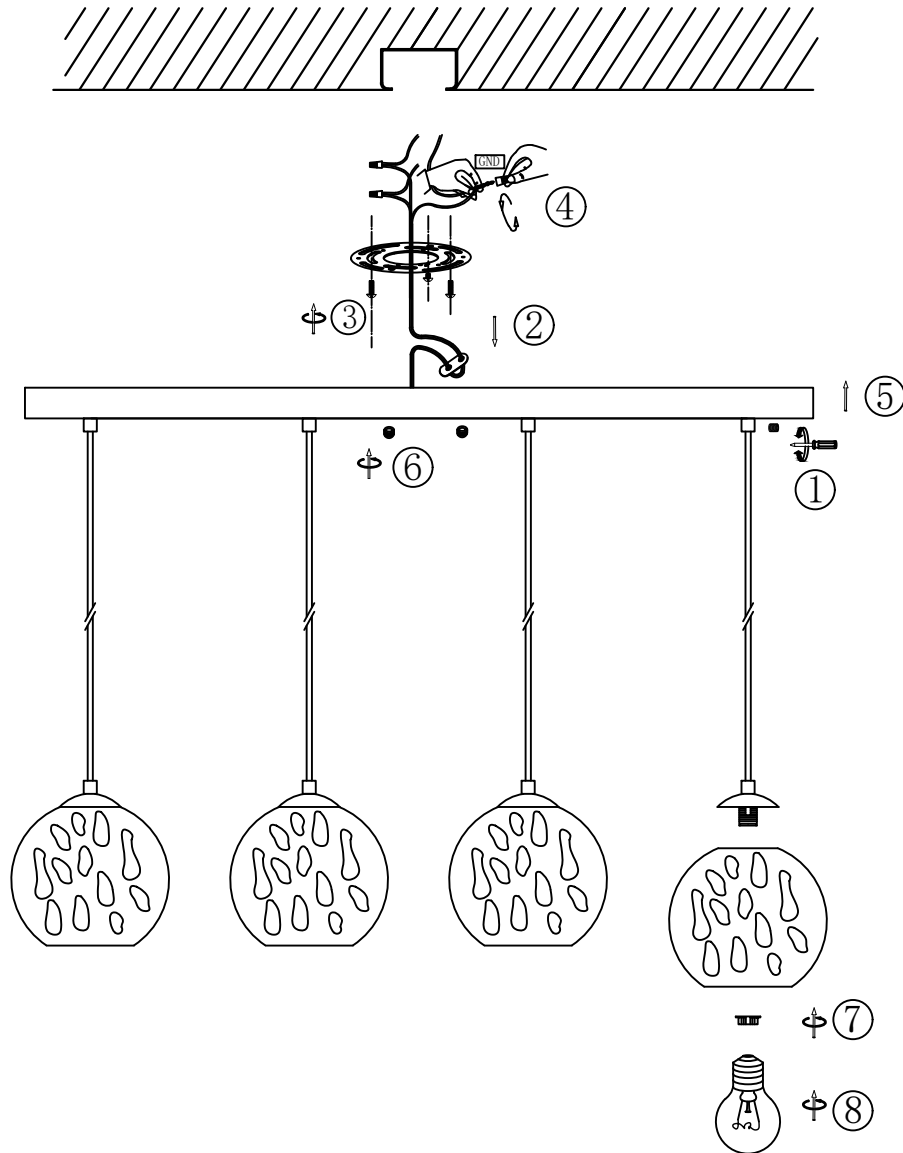

## Before You Begin:

- Ensure power is turned off at the circuit breaker before installation.
- Read all instructions carefully.
- Installation should be performed by a qualified electrician if you are unfamiliar with wiring.

## Step-by-Step Installation:

1. Loosen the set screws, and adjust the suspension wires to the desired height. Tighten the screws to secure.
2. Slide the position of the figure-8 adjuster until it rests flush against the canopy.
3. Secure the mounting plate to the ceiling junction box using the provided screws.
4. Connect Electrical Wires
  - Use wire connectors to connect the black (hot) wire to the black wire, the white (neutral) wire to the white wire, and the ground wire to the grounding terminal.
  - Ensure no exposed conductors remain outside wire connectors or outside the junction box.
5. Position the fixture body upward, and align it with the mounting plate.
6. Secure the canopy to the mounting plate by tightening the decorative finial nuts.
7. Attach the glass lampshades to the light holders, and secure it by tightening the retaining rings.
8. Screw the bulbs into the light holders as indicated on the diagram. (Bulbs Not Included)

## Safety Instructions:

**To avoid fire, shock, and serious personal injury, follow all instructions carefully.**

1. Do not install or use the light fixture if any part is missing or damaged.
2. To avoid possible electrical shock be sure electricity is turned off at the main fuse or circuit breaker box before wiring.
3. Make certain no bare wires are exposed outside the wire connectors.
4. All wiring must conform to national and local electrical codes.
5. Follow the recommended instructions for the proper method of wiring your new light fixture. If you feel you do not have enough electrical wiring knowledge or experience, have your light fixture installed by a licensed electrician. Any electrical work not described in this manual should be performed by a licensed electrician.