

## QUICK REFERENCE GUIDE

OR30SDPWIX1

# 30" INDUCTION RANGE



Combining the best of both worlds, the Fisher & Paykel 30" Induction Range gives you the cooking benefits of an easy to clean, four zone induction cooktop with the flexibility of a large self-cleaning electric oven. This range is designed to complement the Fisher & Paykel built-in product series with clean lines of black glass and stainless steel.



### A PEACE OF MIND SALE

24 Hours 7 Days a Week Customer Support

T 1.888.936.7872 W [fisherpaykel.com](http://fisherpaykel.com)

## FEATURES & BENEFITS

<b>Perfect Results</b>	Professional performance is delivered by eight oven functions — perfect for any culinary requirements. The cooktop's PowerBoost function delivers 3700 watts of instant, intense heat when you need it and there is also a gentle heat setting for slow, continuous simmering.
<b>Sized to Suit</b>	This 30" range is spacious with 3.6 cu. ft. of total capacity. A five position shelving system allows ample space for larger meals.
<b>Designed to Match</b>	Induction cooking is popular with those who love visual simplicity. This Range is designed to complement the Fisher & Paykel kitchen product family with clean lines of black glass and stainless steel.
<b>Easy Cleaning</b>	Cleaning is made simple with the flat surface of the induction cooktop; the self-cleaning oven function and easily removable oven door.
<b>Precise Control</b>	Benefits of induction include fast heat-up times, immediate response and precision cooking; cooler temperatures on the glass; and greater energy efficiency than that of either gas or electric.
<b>Safe and Sound</b>	A triple glazed door makes the oven safe to touch; the door and oven cooling system keep heat away from cabinetry; while the cooktop has a the pan detection system that alerts you if the cooktop is left on with no pan in place.
<b>Oven functions</b>	Bake, Convection Bake, Broil, Convection Broil, Fan Forced, Defrost, Warm, Self-clean.

<b>SKU</b>	88660
<b>UPC</b>	822843886609

## SPECIFICATIONS

<b>Finish</b>	Stainless steel with black reflective glass
<b>Dimensions</b>	H35 21/32 - 36 11/32" x W29 7/8" x D24 7/32"
<b>Total capacity</b>	3.6 cu. ft.
<b>Shelf positions</b>	5
<b>Cooktop</b>	4 Induction zones
<b>Oven functions</b>	7 + Self-clean
<b>Zone ratings</b>	
2300W (3700W)	●
1400W (2500W)	●
1850W (1800W)	2
PowerBoost	Up to 3700W (zone dependent)
<b>Performance</b>	
Broil	2,850W
Bake	2,950W
Convection Bake	2,450W
Warming drawer	500W
Induction cooking technology	●
Combined warming/storage drawer	●
<b>Cleaning</b>	
Self-clean	●
<b>Safety</b>	
Glazed door	CoolTouch triple glazed door
Door and cavity cooling system	●
<b>Controls</b>	
Electronic clock	●
Automatic cooking/minute timer	●
Indicator light	●
<b>Power requirements</b>	
Supply voltage	240 - 208/120V
Supply frequency	60Hz
AMP draw	46A (240V) 48.84A (208V)
<b>Warranty</b>	2 years

For full specifications visit [fisherpaykel.com](http://fisherpaykel.com)


**Fisher & Paykel**

**DATA SHEET**

**30" INDUCTION RANGE**

Model no:

**OR30SDPWIX1**

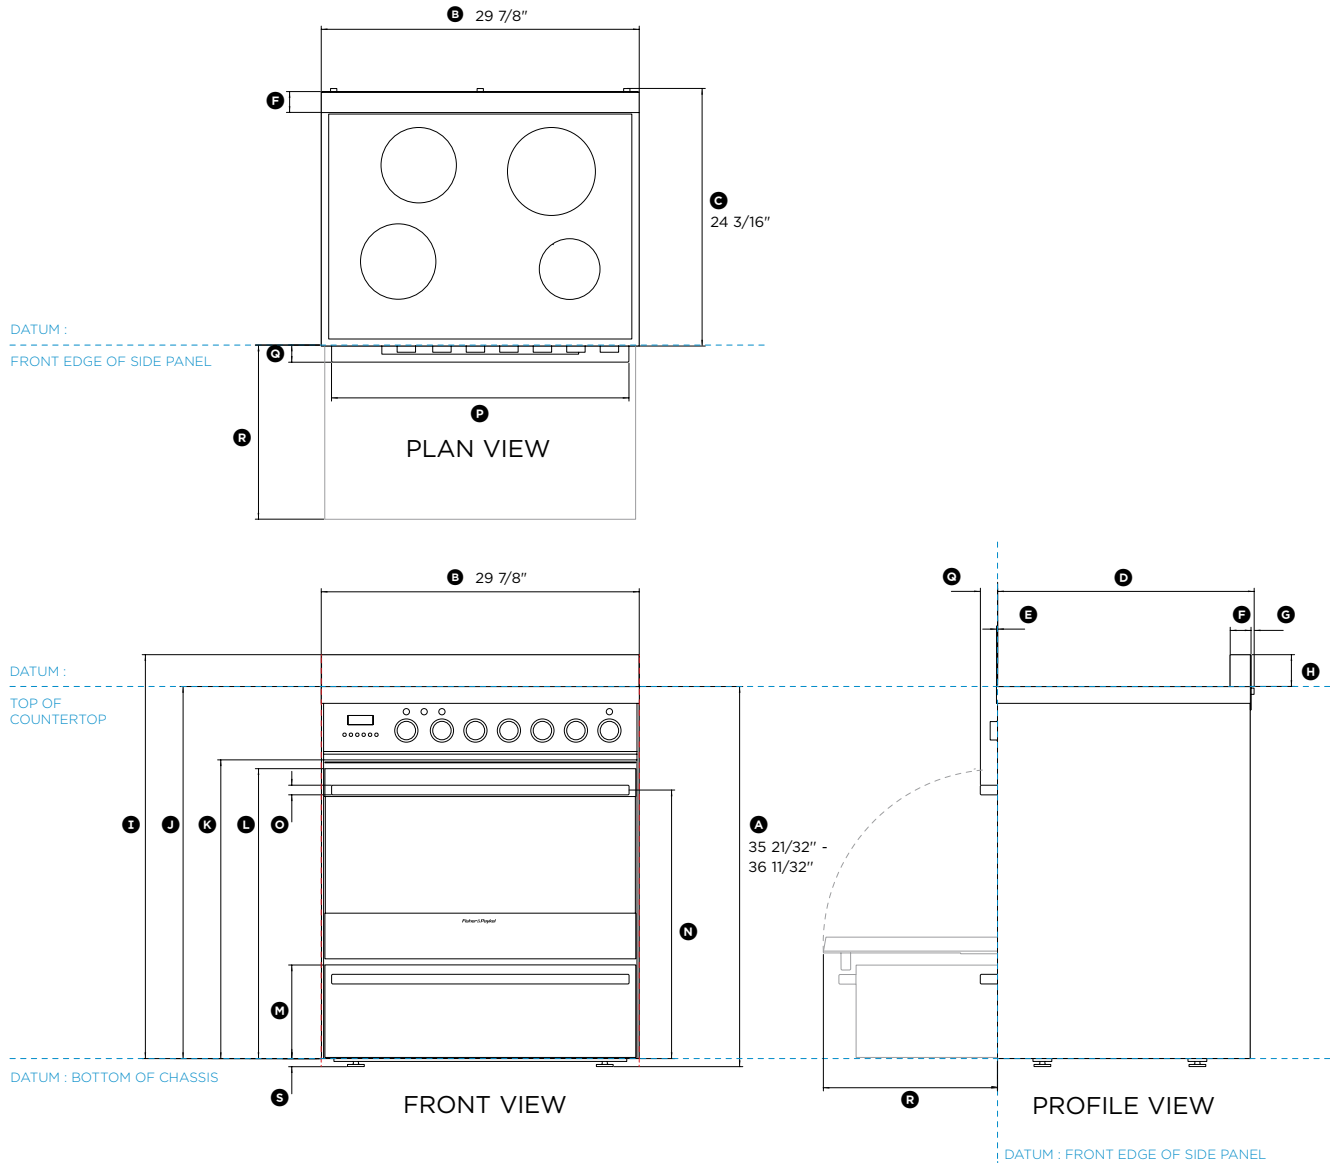

Dimensions	In
Ⓐ Overall height of range (from floor to cooktop trim, excluding grates and backguard)	35 21/32" - 36 11/32"
Ⓑ Overall width of range	29 7/8"
Ⓒ Overall depth of range (excludes handle and dials)	24 3/16"
Ⓓ Depth from rear of chassis to front datum	24 1/8"
Ⓔ Depth of cooktop trim to front datum	3/32"
Ⓕ Depth of backguard	1 15/16"
Ⓖ Depth of spacers	5/16"
Ⓜ Height of backguard from countertop datum	3"
Ⓢ Height from bottom of chassis to top of backguard	37 31/32"
Ⓣ Height from bottom of chassis to countertop datum	34 31/32"
Ⓤ Height from bottom of chassis to bottom of control panel	28 1/16"
Ⓦ Height from bottom of chassis to top of oven door	27 1/4"
Ⓧ Height from bottom of chassis to top of storage drawer	8 13/16"
Ⓨ Height from bottom of chassis to door handle centerline	25 1/4"
Ⓩ Thickness of handle	29/32"
ⓐ Width of handle	27 15/16"
ⓑ Depth of handle to front datum	1 5/8"
ⓓ Depth of open door to front datum	16 5/16"
ⓔ Height of adjustable levelling feet	1 1/16" - 1 3/8"

Minimum Clearances*	in
Overall width of cavity	min 29 7/8"
Overall depth of cavity	max 24 1/8"
Overall height of cavity	35 21/32" - 36 11/32"

\* Refer to installation documents for additional cabinetry clearances.

INDICATES PRODUCT DATUM -----  
INDICATES CLEARANCES - - - - -

DATE: **03.08.2015**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (3/32"). Please read the installation manual for detailed information on installing the product. [www.fisherpaykel.com](http://www.fisherpaykel.com)