QUICK REFERENCE GUIDE

OR30SDBMX1

30" GAS RANGE



This 30" Gas Range gives you the flexibility to prepare several courses simultaneously with a large gas oven and four burner gas cooktop. The cooktop is made from a single piece of stainless steel for easy cleaning. The unique design and clean lines in black glass and stainless steel complement the style of any kitchen.



A PEACE OF MIND SALE

24 Hours 7 Days a Week Customer Support
T 1.888.936.7872 W fisherpaykel.com

FEATURES & BENEFITS

Perfect Results	Professional performance is delivered by powerful
	gas burners on the cooktop and three oven
	functions, bake, fan bake and broil.
Sized to Suit	This 30" range is spacious with 3.6 cu. ft. of total
	capacity. A four position shelving system allows
	ample space for larger meals.
Designed to Match	This Range is designed to complement the Fisher &
	Paykel kitchen product family with clean lines of
	black glass and stainless steel.
Easy Cleaning	The gas cooktop is made from a single piece of
	stainless steel that contains spills to be simply wiped
	away, while the easily removable oven door and
	runners make cleaning easy.
Precise Control	Generous stainless steel control dials with a simple,
	functional interface are positioned on a full stainless
	steel control panel for precise control over cooking
	temperatures.
Safe and Sound	A CoolTouch door and built-in cooling system ensure
	the oven door is safe to touch externally. Streamlined
	cast iron trivets on the cooktop let you slide pots and
	pans without lifting them
Oven functions	Bake, Fan Bake, Broil.

SKU	88662
UPC	822843886623


SPECIFICATIONS

Finish	Stainless steel with black reflective glass	
Dimensions	H35 21/32 - 36 11/32" x W29 7/8" x D24 7/32"	
Total capacity	3.6 cu. ft.	
Shelf positions	5	
Cooktop	4 Gas burners	
Oven functions	3 + light	
Burner ratings		
Semi-rapid	8,000 BTU (2)	
Dual wok burner	17,000 BTU (2)	
Performance		
Broil	11,000 BTU	
Oven	14,000 BTU	
Electronic ignition	•	
LPG/Natural gas compatible	•	
Storage drawer	•	
Lights	2 (Rear)	
Cleaning		
Acid resistant graphite enamel	•	
Safety		
Glazed door	CoolTouch triple glazed door	
Door and cavity cooling system	•	
Flame failure	•	
Controls		
Turned stainless steel dials	•	
Electronic clock	•	
Indicator light	•	
Power requirements		
Supply voltage	120V	
Supply frequency	60Hz	
AMP draw	0.92A	
Warranty	2 years	

For full specifications visit fisherpaykel.com



DATA SHEET

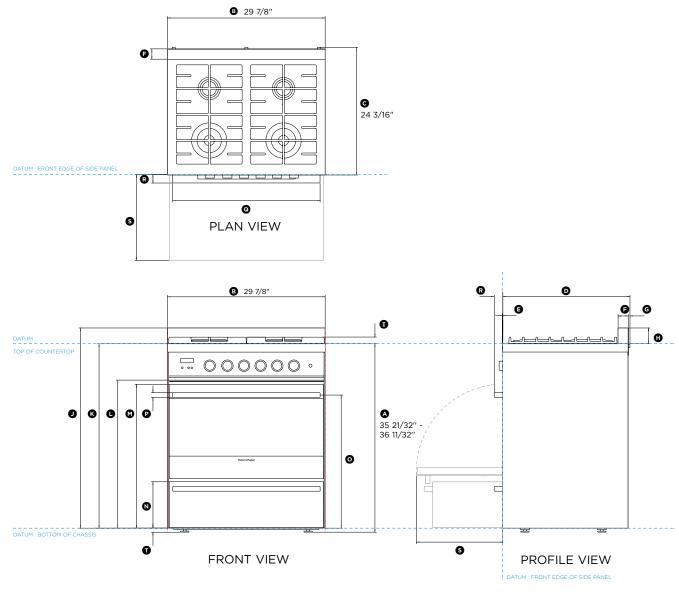

30" GAS RANGE

Model no:

OR30SDBMX1

Dimensions	In
Overall height of range (from floor to cooktop trim, excluding grates and backguard)	35 21/32" - 36 11/32"
Overall width of range	29 7/8"
© Overall depth of range (excludes handle and dials)	24 3/16"
Depth from rear of chassis to front datum	24 1/8"
© Depth of cooktop trim to front datum	3/32"
Depth of backguard	1 15/16"
© Depth of spacers	5/16"
Height of backguard from countertop datum	3"
Height from countertop datum to top of grates	1 1/4"
Height from bottom of chassis to top of backguard	37 31/32"
Height from bottom of chassis to countertop datum	34 31/32"
© Height from bottom of chassis to bottom of control panel	28 1/16"
Height from bottom of chassis to top of oven door	27 1/4"
N Height from bottom of chassis to top of storage drawer	8 13/16"
Height from bottom of chassis to door handle centerline	25 1/4"
Thickness of handle	29/32"
Width of handle	27 15/16"
® Depth of handle to front datum	1 5/8"
Depth of open door to front datum	16 5/16"
Height of adjustable levelling feet	11/16"

Minimum Clearances*	in
Overall width of cavity	min 29 7/8"
Overall depth of cavity	max 24 1/8"
Overall height of cavity	35 21/32" - 36 11/32"

^{*} Refer to installation documents for additional cabinetry clearances.

INDICATES PRODUCT DATUM ------INDICATES CLEARANCES ------

DATE: 03.08.2015

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ± 2 mm (3/32"). Please read the installation manual for detailed information on installing the product. www.fisherpaykel.com

