

QUICK REFERENCE GUIDE

HC30DTX1

30" VENTILATION HOOD WALL MOUNTED



This ventilation hood has a selection of fan speeds and clever features that quietly and efficiently remove steam, smoke and lingering smells. The soft touch control panel responds to the touch of your finger. Halogen lights provide superb illumination over the entire cooking surface.



A PEACE OF MIND SALE

24 Hours 7 Days a Week Customer Support

T 1.888.936.7872 W fisherpaykel.com

FEATURES & BENEFITS

Designed to match	This ventilation hood is finished in stainless steel that blends elegant, minimalist aesthetic and is designed for durability. The stainless steel ventilation hood matches the rest of Fisher & Paykel's family of appliances.
Effective and quiet	This ventilation hood has noise levels from as low as 48dBA on speed 1 to a maximum sound level of 67dBA on speed 4. With a maximum air speed of 615 CFM, the high volumetric flow rate provides effective extraction of grease and cooking smells.
Dishwasher Safe Aluminum Filters	Consisting of layers of aluminum mesh that trap grease particles, but let air through. The filters will protect your ventilation hood and kitchen from grease build-up.
Ducted (Recirculated Options Available)	The product comes ready to be installed into a ducted installation. Ducted ventilation hoods are more efficient at removing steam, grease and smells.

SKU Code	88663
UPC Code	822843886630

SPECIFICATIONS

Finish	Stainless steel
Dimensions	H23 3/4" - 41 1/16" x W29 23/32" x D19 11/16"
Fan ratings	
Max air movement	615 CFM
Max sound level	67dBA
Performance	
Surface extraction	●
Fan speeds	4
Controls	
Soft-touch buttons	●
Timer function	●
Intensive speed	●
Angled halogen lights	2 x 50W
Cleaning	
Dishwasher safe aluminum mesh filters	2
Installation	
Two-piece height adjustable flue	●
Air outlet	6"
Ducted - top extraction	●
Recirculation - top extraction (optional)	●
Power requirements	
Supply voltage	120V
Supply frequency	60Hz
AMP draw	5.2A
Accessories	
Ducting solution	●
Recirculation diverter	●
Recirculation carbon filter	●
Warranty	2 years

For full specifications visit fisherpaykel.com

Fisher & Paykel


DATA SHEET

30" WALL MOUNTED VENTILATION HOOD


Model no:

HC30DTX1

Product Dimensions	in
Ⓐ Maximum height of rangehood	41 1/16"
Ⓑ Minimum overall height - recirculating	26 31/32"
Ⓒ Minimum overall height - ducted	25 13/32"
Ⓓ Overall width of rangehood	29 23/32"
Ⓔ Overall depth of rangehood	19 11/16"
Ⓕ Height of canopy	2 1/8"
Ⓖ Width of chimney	12 19/32"
Ⓗ Depth of chimney	11 15/32"
Ⓘ Ducting outlet diameter	5 15/16"
Ⓚ Distance from centre of ducting outlet to back of product	3 9/32"
Ⓛ Height from datum to top of lower chimney section	23 3/4"

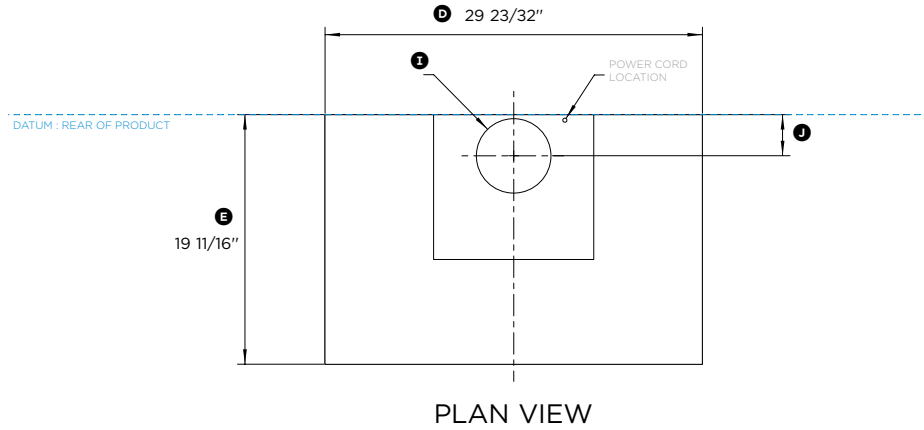

PLAN VIEW

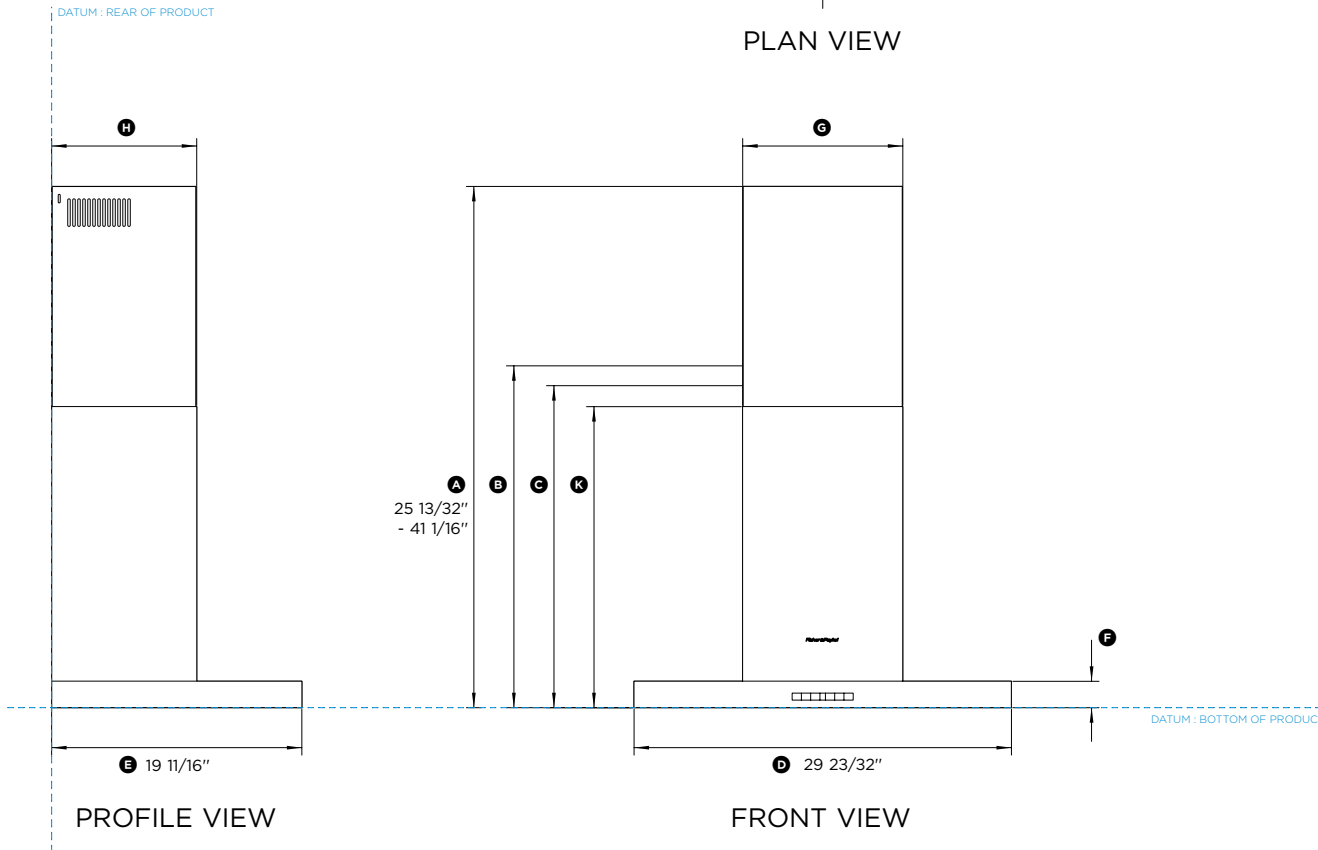

PROFILE VIEW

FRONT VIEW

INDICATES PRODUCT DATUM -----

DATE: **03.09.2015**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (3/32"). Please read the installation manual for detailed information on installing the product. www.fisherpaykel.com