# KitchenAid<sup>®</sup> Side by Side Refrigerator

### **PRODUCT MODEL NUMBERS**

KSSC36FT	KSSC48QV	KSSS36FT
KSSC36QT	KSSO36FT	KSSS36QT
KSSC42FT	KSSO36QT	KSSS42FT
KSSC42QT	KSSO42FT	KSSS42QT
KSSC42QV	KSSO42QT	KSSS48FT
KSSC48FT	KSSO48FT	KSSS48QT
KSSC48FT KSSC48QT	KSSO48FT KSSO48QT	KSSS48QT


**Electrical:** A 115 Volt, 60 Hz., AC only 15- or 20amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water Supply: A cold water supply with water pressure of between 30 and 120 psi (207 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).


Do not install the refrigerator near an oven, radiator, or other heat source, nor in a location where the temperature will fall below 55°F (13°C).

## CABINET OPENING DIMENSIONS

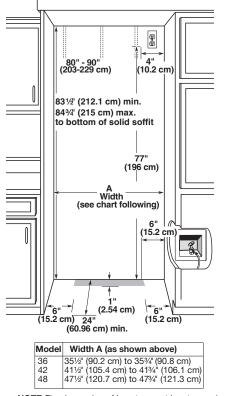


**NOTE:**Flooring under refrigerator must be at same level as the room. Face of cabinetry must be plumb.


## PRODUCT DIMENSIONS

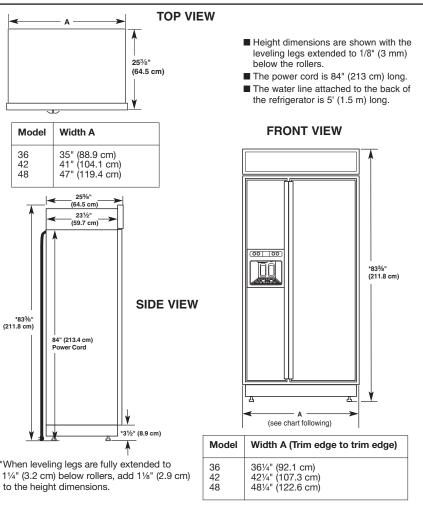


### DOOR SWING DIMENSIONS



42" (106.7 cm) Models



48" (121.9 cm) Models



Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice. Ref. W10379133 4/04/11