




Undercounter Refrigerator

PRODUCT MODEL NUMBERS

MURM24FW


Electrical: A 115 Volt, 60 Hz., AC only 15 or 20 amp fused (or circuit breaker), grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

OVERALL DIMENSIONS

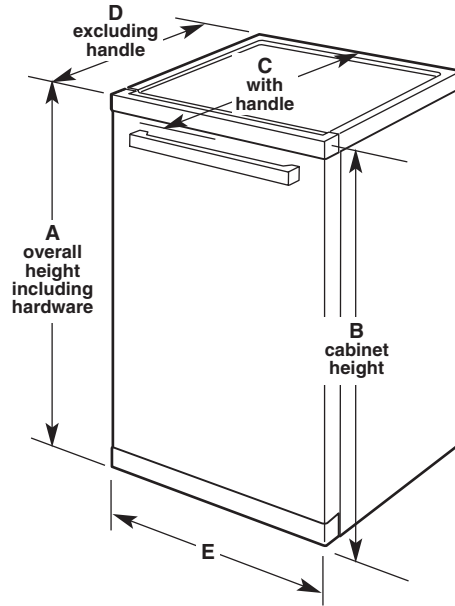

Model	Maximum Height "A"	Minimum Height "B"	Depth - With Handles "C"	Depth - Without Handles "D"	Width - Cabinet "E"
MURM24FW	35 1/8" (89.2 cm)	34 3/8" (87.3 cm)	26 7/8" (68.3 cm)	24 3/8" (61.9 cm)	23 3/4" (60.3 cm)

LOCATION REQUIREMENTS

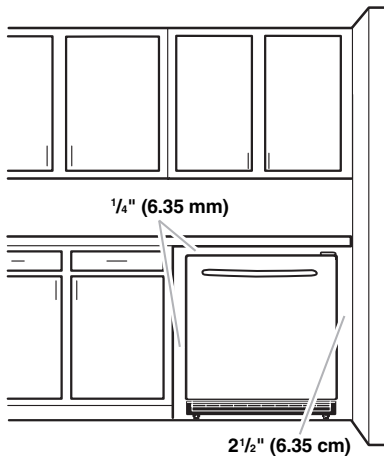

If your refrigerator is to be built-in, to ensure proper ventilation for your refrigerator, allow for 1/4" in. (6.35 mm) space on each side and at the top. When installing your refrigerator next to a fixed wall and the hinge side is next to the wall, leave 2 1/2" (6.35 cm) minimum to allow for the door to swing open. To open door wider, leave more space.

NOTE: Do not install the refrigerator near an oven, radiator, or other heat source, nor in a location where the temperature will fall below 55°F (13°C).

For best performance, do not install the refrigerator behind a cabinet door or block the base grille.