

INSTALLATION INSTRUCTIONS

Model # 72791-143-L

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARING FOR INSTALLATION (Fig. 1)

1. Shut off power at the circuit breaker and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Thread two screws (C) into the pre-drilled holes in the mounting plate (B) spaced the same distance apart as the holes in the back plate and then secure with nuts. The length of screws (C) into mounting plate (B) may be adjusted if necessary.
4. Attach mounting plate (B) using outlet box screws (F) to outlet box (A) (not supplied). The side of the mounting plate marked "GND" must face out (Fig 1).

CONNECTING THE WIRES (Fig. 2)

5. Connect the electrical wires as shown in Fig.2. Making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (B) using the green screw (D) provided.

FINISHING THE INSTALLATION (Fig. 1)

6. Slide back plate over screws (C) and secure with cap nuts (H) (Fig 1).
7. To prevent moisture from entering the outlet box (A) (not supplied) and causing a short, use clear silicone sealant to outline the outside of fixture back plate where it meets the wall leaving a space at bottom to allow moisture a means to escape (Fig. 3)
8. **LED information (1 x AC LED 8W included.) (DO NOT EXCEED THE MAXIMUM WATTAGE RATING) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Replacing LED module (Fig.4)

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig.4).

- a. Shut off power. Remove Glass (R), loosen screws (I) and plastic washer (P), then remove glass panel (J).
- b. Loosen screws (Q) and rubber washer (K) on the LED module.
- c. Loosen screws (M) and separate the top cover (O) from the fixture frame (N), then disconnect the plug on the wires. Carefully remove LED module (L).
- d. Reverse steps a-c for installing the new LED module.

Note: The LED module should be provided by a specified supplier.

Your installation is now complete. Return power to the outlet box and test the fixture.

american
lighting
association



"CAUTION-RISK OF FIRE CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR"

ATTENTION - RISQUE D'INCENDIE. CONSULTER UN ÉLECTRICIEN QUALIFIÉ POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DÉRIVATION SONT ADÉQUATS.

Fig.1

Mounting plate (1) (Part#A-020)
LED module (1) (Part# L-MD-C1402-8W)
Ground screw (1)
Mounting screws (2)

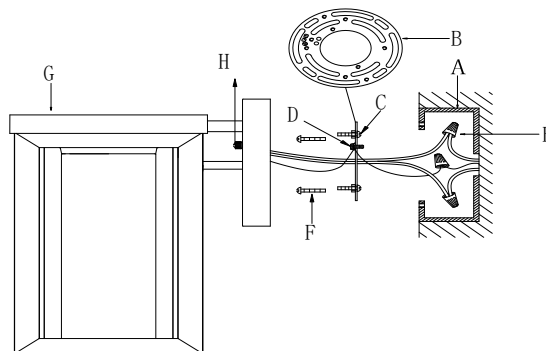


Fig.2

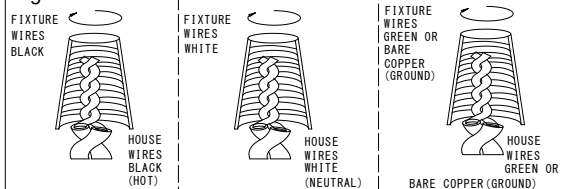


Fig. 3

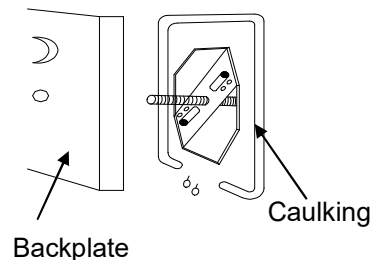


Fig. 4

