


Product Dimensions

30" (76.2 cm) Cooktops

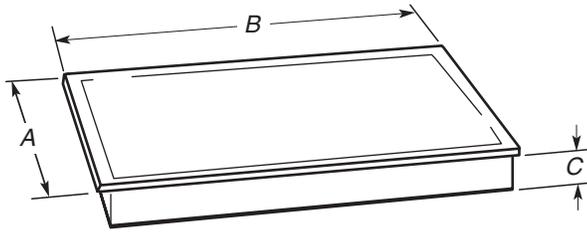

**Models JIC4430
and GIC3061**

Model ICI500


**Models KICU500
and KICU509**

A. 21⁵/₁₆" (54.1 cm)
B. 30⁵/₁₆" (77.0 cm)
C. 2³/₈" (6.0 cm)

A. 20⁷/₈" (51.0 cm)
B. 30³/₁₆" (77.0 cm)
C. 2³/₈" (6.0 cm)

A. 21⁵/₁₆" (54.1 cm)
B. 30³/₄" (78.2 cm)
C. 2³/₈" (6.0 cm)

36" (91.4 cm) Cooktop

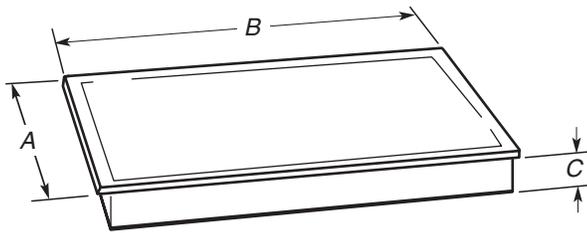


**Models JIC4536
and KICU569**

A. 21⁵/₁₆" (54.1 cm)
B. 36⁵/₁₆" (92.0 cm)
C. 2³/₈" (6.0 cm)

Cabinet Dimensions

IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

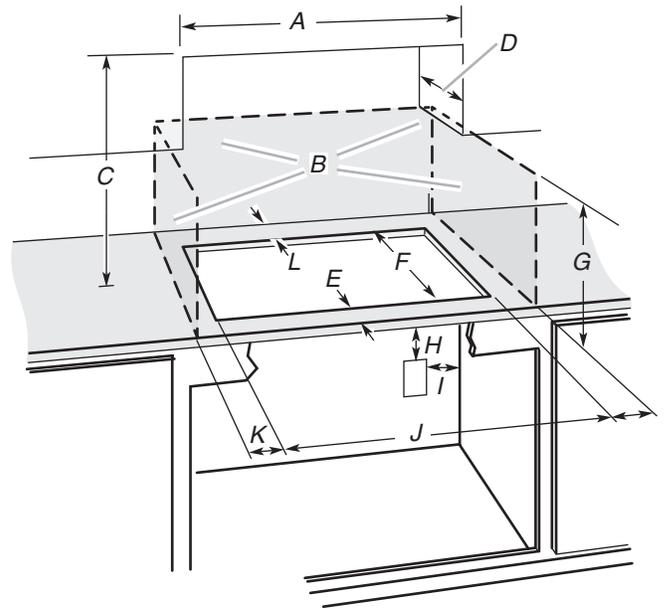

- A. 29¹/₂" (75.0 cm) on 30" (76.2 cm) models
33¹/₁₆" (84.0 cm) on 36" (91.4 cm) models
- B. Combustible area above countertop (shown by dashed box above)
- C. 30" (76.2 cm) minimum clearance between top of cooktop platform and bottom of uncovered wood or metal cabinet (24" [61 cm] minimum clearance if bottom of wood or metal cabinet is covered by not less than 1/4" [0.6 cm] flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" [0.04 cm] stainless steel, or 0.024" [0.06 cm] aluminum or 0.020" [0.05 cm] copper)
- D. 13" (33.0 cm) recommended upper cabinet depth
- E. 2" (5.1 cm)
- F. 19⁵/₁₆" (49.0 cm)
- G. 18" (45.7 cm) minimum clearance from upper cabinet to countertop within minimum horizontal clearances to cooktop
- H. Junction box or outlet; 12" (30.5 cm) minimum from bottom of countertop
- I. Junction box or outlet; 10" (25.4 cm) from right-hand side of cabinet
- J. 29¹/₂" (75.0 cm) on 30" (76.2 cm) models
33¹/₁₆" (84.0 cm) on 36" (91.4 cm) models
- K. 1" (2.5 cm) minimum distance to nearest left and right side combustible surface above cooktop
- L. 1" (2.5 cm) minimum clearance between back wall and countertop

NOTES: After you make the countertop cutout, some installations may require notching down the base cabinet side walls to clear the cooktop base. To avoid this modification, use a base cabinet with sidewalls wider than the cutout.

If cabinet has a drawer, a 5¹/₈" (13 cm) depth clearance from the countertop to the top of the drawer (or other obstruction) in base cabinet is required.

Provide a clearance of 3/16" (5 mm) under the countertop, above an oven or cabinets, in the front of the cabinet to provide for proper ventilation. The clearance should be the length of the cooktop cutout.

