

ASSEMBLY INSTRUCTIONS



CAUTION

◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.



If you need further assistance, please contact us by Email: customersupport@superiordecorinc.com

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver



Flat blade screwdriver



Pliers




Wire strippers


HARDWARE INCLUDED



Fixture



Iron Rack A




Iron Rack B




Iron Rack C



Screws




Nuts




Stems




Finial



Quick Link




Ceiling Plate




Mounting Unit



Ball Nuts



Wood Screws



Plastic Anchors




Mounting Screws



Wire Nuts

* PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE




EXPLODED PARTS

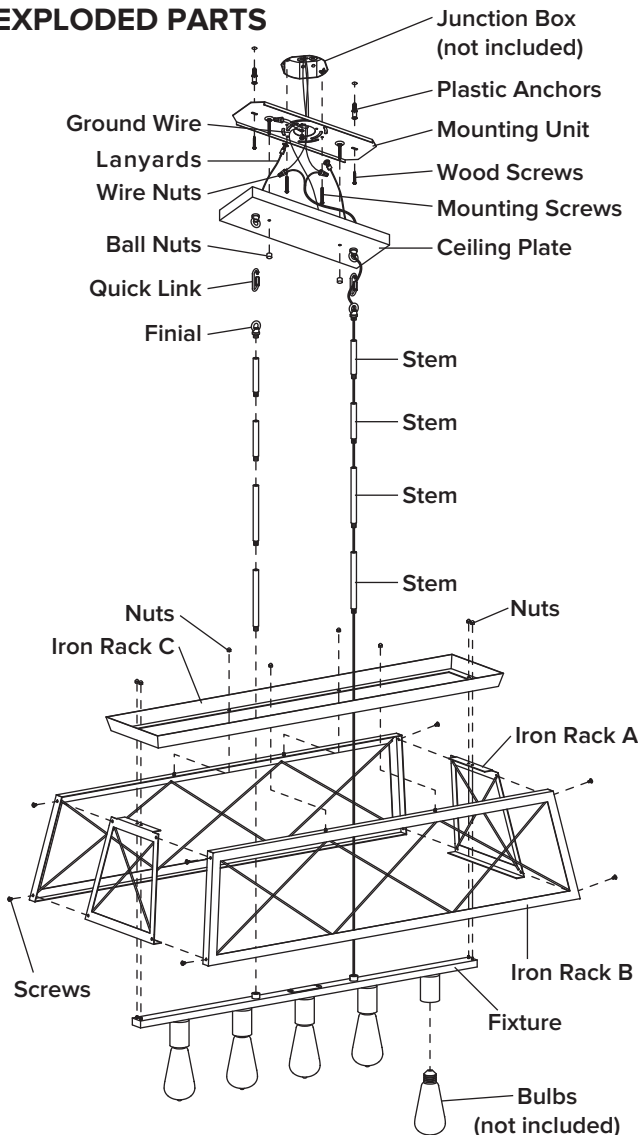

INSTALLATION




STEP 1

Attach the **iron rack A** to **iron rack B** using **screws**.

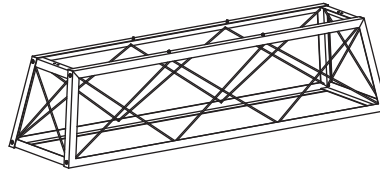


STEP 2

Attach the **iron rack C** to **iron rack B** using **nuts**. Attach the **fixture** to **iron rack A** using **nuts**.

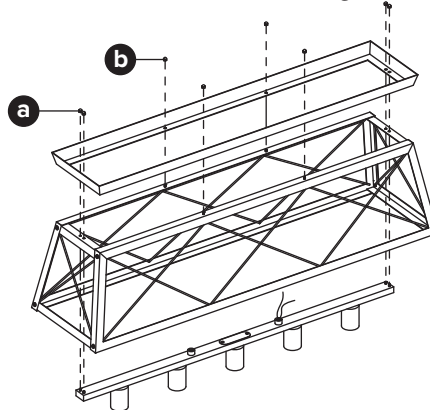


STEP 3

Unscrew the **ball nuts** and **green grounding screw** from the **mounting unit**.

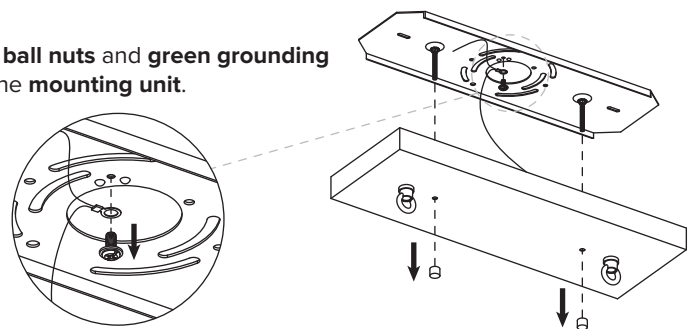


STEP 4

- Place the **mounting unit** in the desired position and mark the drilling position with a pencil. Note: Ensure that the **mounting unit** can be fitted to the junction box (not included) with **mounting screws**.
 - Using a 5/16 " (8mm) drill bit (not included), drill holes in the marked areas.
 - Insert the **plastic anchors** into the drilled holes.
- Next, Attach the **mounting unit** to the junction box (not included) using the **mounting screws**. Secure **mounting unit** to ceiling with **wood screws**.

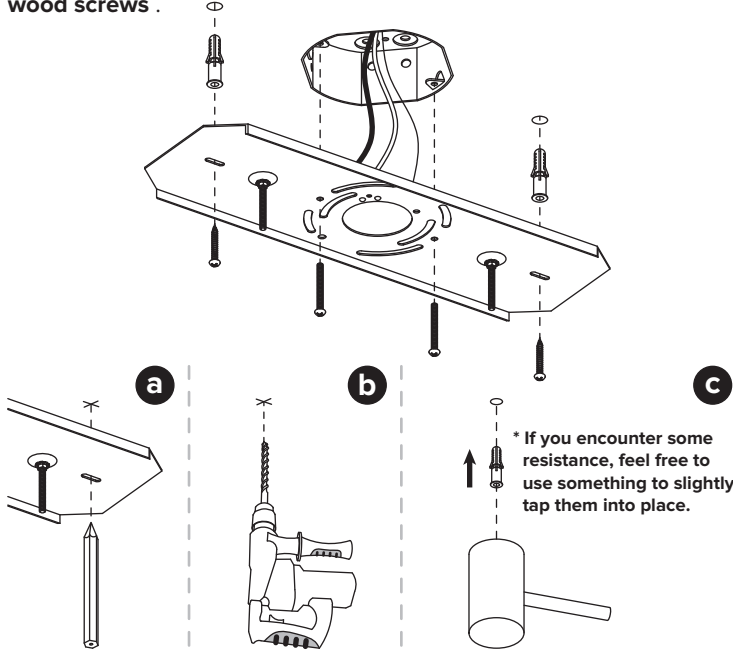


STEP 5

- Pass the fixture wire and fixture ground wire through the **stems** and **finial**.
- Install **finial** and **stems** into the **fixture**.

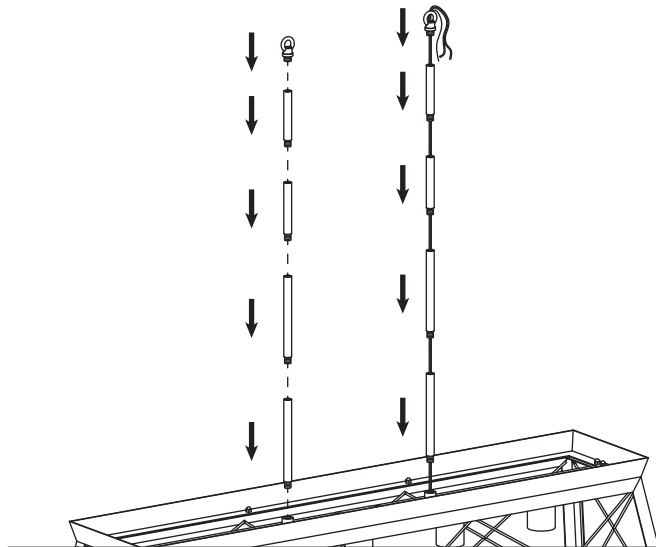




STEP 6

- Pass the fixture wire and fixture ground wire through the **ceiling plate**.
- Open the **quick link**. Then attach it to the **ceiling plate** and **finial**, close the **quick link**.

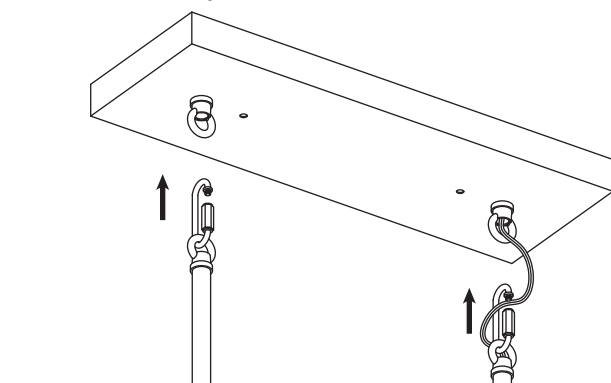


STEP 7

- Attach the **lanyards** on to the **mounting unit**.
- Make the electrical connection from the junction box (not included) to the **fixture**. Connect the **ground wire** to the **mounting unit** using the preinstalled green ground screw. Next, connect the live wire, neutral wire and ground wires with the supplied **wire nuts**. Secure with electrical tape.

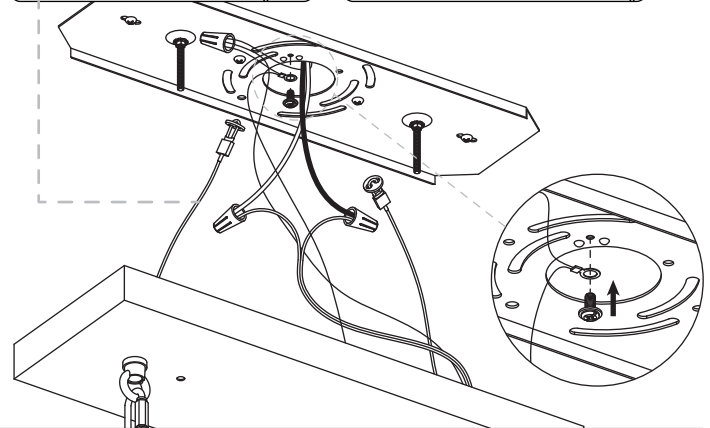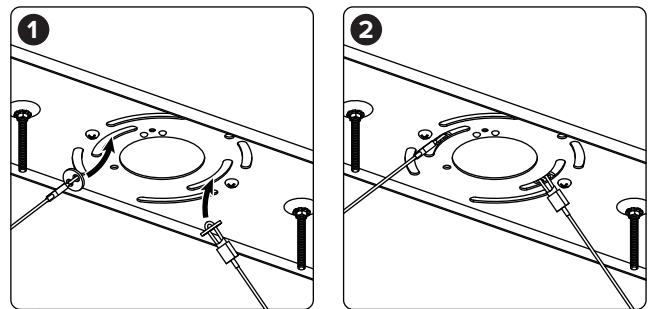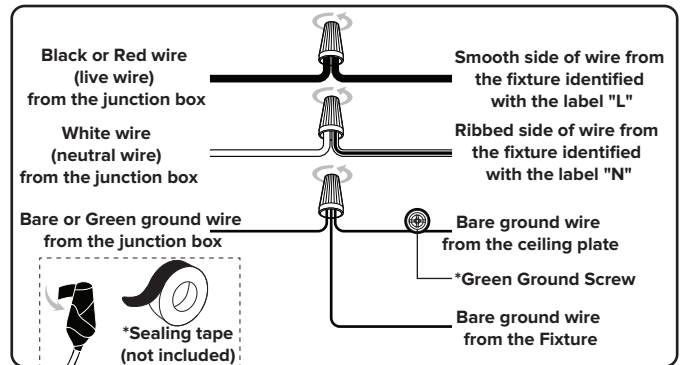

STEP 8

Attach the **ceiling plate** to the **mounting unit** through screw holes as shown, and secure it with **ball nuts**.

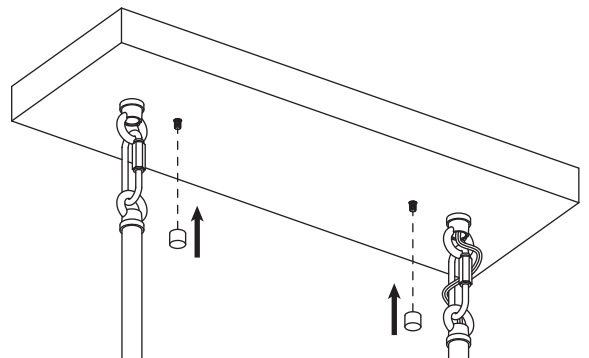

STEP 9

Install bulbs (not included).

