

WaterTile® Showerhead K-8022

Features

- Single function 54-nozzle showerhead with soothing spray.
- Fully adjustable, pivoting MasterClean™ sprayface.
- 2.2 gpm (8.3 lpm) maximum flow rate.

Installation

- Vertical wall installation.
- 1/2" NPT connections.



Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Color/Finishes


Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel
	2BZ	Oil-Rubbed Bronze
	TT	Vibrant Titanium
	VNT	Vintage Nickel





WaterTile® Showerhead K-8022

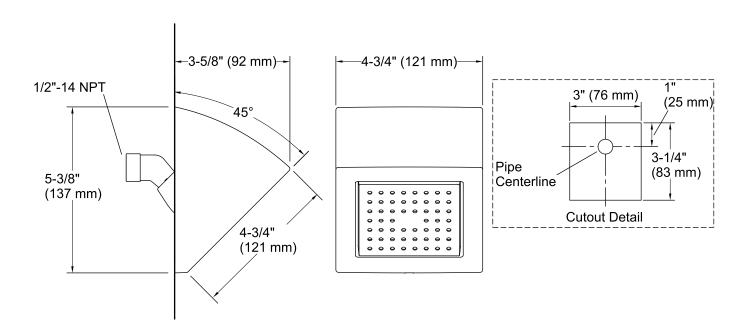

Technical Information

All product dimensions are nominal.

Showerhead:

Rated maximum flow: 2.2 gal/min (8.3 l/min)

Notes

Install this product according to the installation guide.

