



Finesse® Quick-Install®

Frameless Sliding Bath Door

5325EZ-59

Features

- Complete door installs within minutes.
- Pre-installed rollers for smooth, silent operation.
- Frameless design highlights showering area.
- Frameless, 1/4" (6 mm) thick tempered glass.
- Center-guided mechanism for smooth, quiet sliding action and easy cleaning.
- CleanCoat® technology creates a barrier between the water and glass to help keep your shower door looking new.
- Wide variety of finishes and glass patterns.
- Inside and outside towel bars complete the look of this door.

Material


- Anodized aluminum prevents rusting or corrosion.
- Tempered glass ensures maximum safety and durability.

Installation

- Out-of-plumb adjustability allows for simpler installation.
- Can be installed to open to the left or right.
- Quick Install® compression fit technology means no cutting or drilling needed.

Components

Additional included component/s: Hardware kit, and hex wrench.

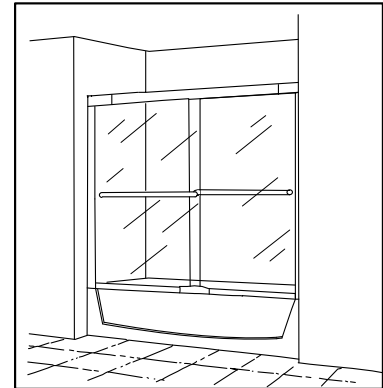

Codes/Standards

ANSI Z97.1 (Tempered Glass)
CPSC 16CFR 1201


STERLING® Warranty - Bath and Shower Doors


See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|

| | | |
|--|---|--------|
|  | S | Silver |
| | N | Nickel |

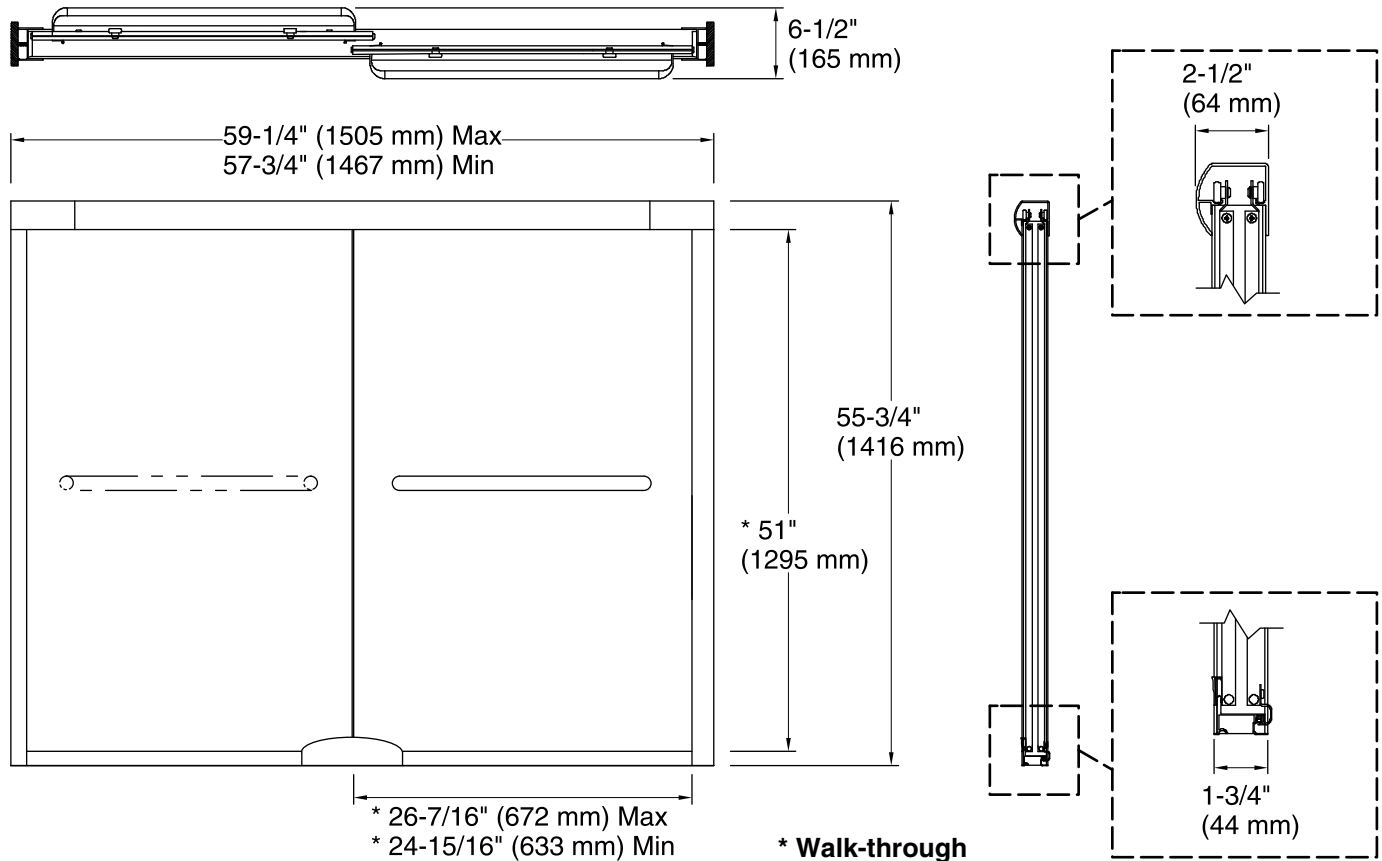

Technical Information

All product dimensions are nominal.

- Installation type: For bath installation
- Opening Width - Min: 57-3/4" (1467 mm)
- Opening Width - Max: 59-1/4" (1505 mm)
- Walk-through - Min: 24-15/16" (633 mm)
- Walk-through - Max: 26-7/16" (672 mm)
- Glass thickness: 1/4" (6 mm)

Notes

Install this product according to the installation guide.