

Assembly Instruction Sheet #IS-8318P70C-28+21+14+14+7 For Style 8318P70C-28+21+14+14+7

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Light Source: (84) Candelabra Base Bulbs 60W Maximum.

Estimated Assembly Time: 20-30 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.


These instructions are provided for your safety. It is very important you read them completely before installing the fixture.

We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.


STEP 1 -Install Support Arms

A.(Refer to SUPPORT ARMS DISTRIBUTION) Pass supply wires from support arms through plate with coupling and plate with socket as shown. Secure them together by threading lock screws onto the plates. Hand tighten until snug with screwdrivers.

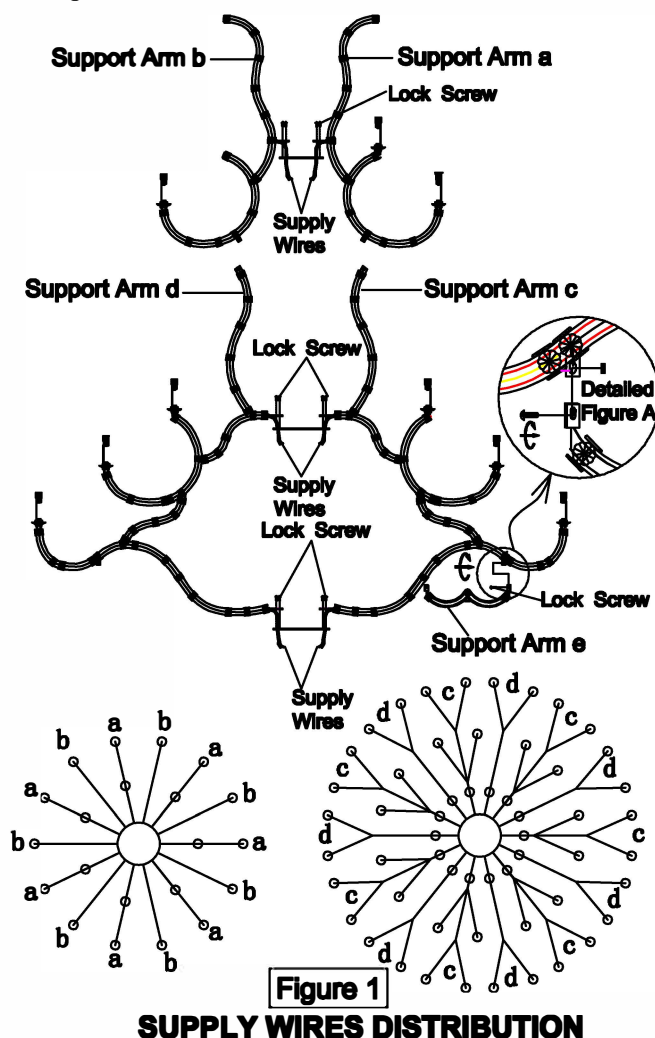


STEP 2 -Install Cap, Crystal Cap and Fixture Loops

A. Thread the Support Wire through the Fixture Loop the plate with coupling and the 4"Nibble, then the wire come out from the side of 4"Nibble. Fix the loop, the plate and the 4"Nibble together. Thread the wire through the plate coupling, crystal bobèche the cover and the 4"Nibble. Then the wire come out from the side of Nibble. Use the wire cap to connect the wires together (Like wire connections A showing in the page No.2) Please tighten up the wires together with the electrical insulation tape. Thread the cover and the bobèche through the 4"Nibble, fix then together with the coupling.


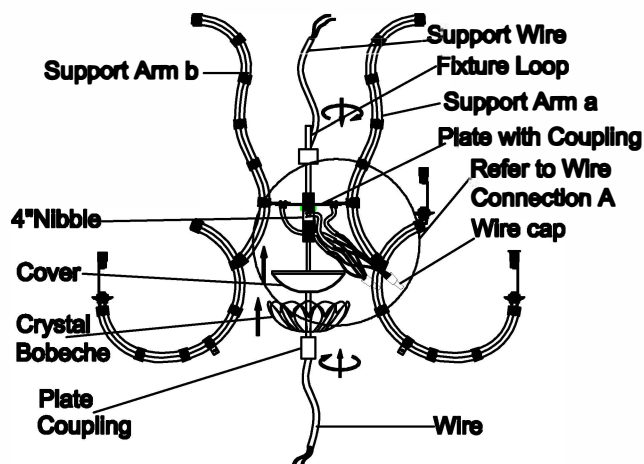


B. Thread the Support Wire through the 27"Nibble the plate with coupling and the 5"Nibble, then the wire come out from the side of 5"Nibble. Fix the coupling, the plate and the 5"Nibble and 27"Nibble together. Use the lock screws and nuts to fix the Support Arm d and c, a and b together (Like the detailed figure B). The other side thread the wire through the plate coupling, crystal bobèche the cover and the 5"Nibble. Then the wire come out from the side of 5"Nibble. Use the wire cap to connect the wires together (Like wire connections B showing in the page No.2). Please tighten up the wires together with the electrical insulation tape. Thread the cover and the bobèche through the 5"Nibble, fix then together with the coupling.


(Step 2 Continued)

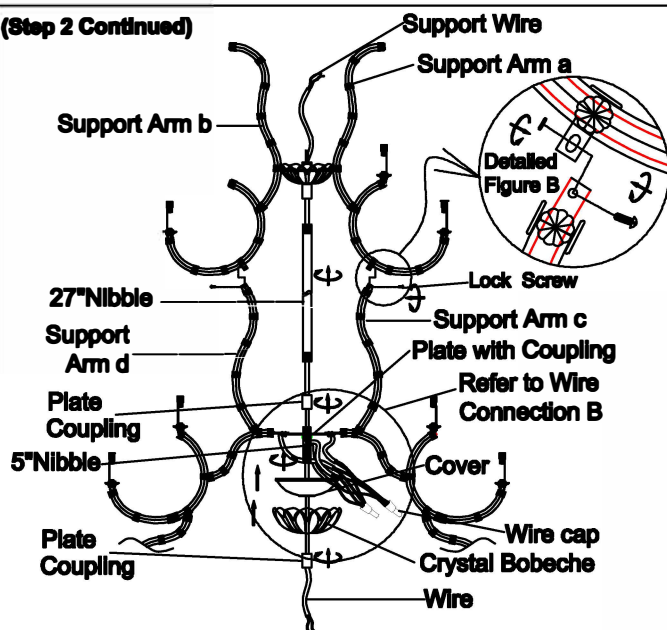


C. Thread the Support Wire through the 20-inch Nibble the plate with coupling and the 4-inch Nibble, then the wire come out from the side of 4-inch Nibble. Fix the coupling, the plate and the 20-inch Nibble together. Use the wire cap to connect the wires together (Like wire connections C showing in the page No.2). Please tighten up the wire cap with the electrical insulation tape. Fix the 3-inch Nibble with hex nut with the plate. Thread the bobèche, the cap through the 3-inch Nibble, then fix then together with the finial.

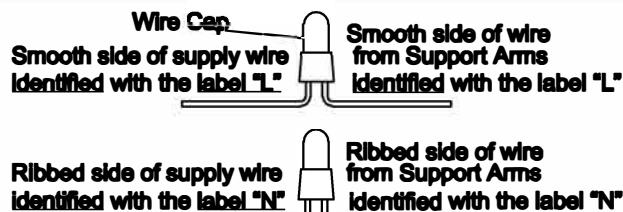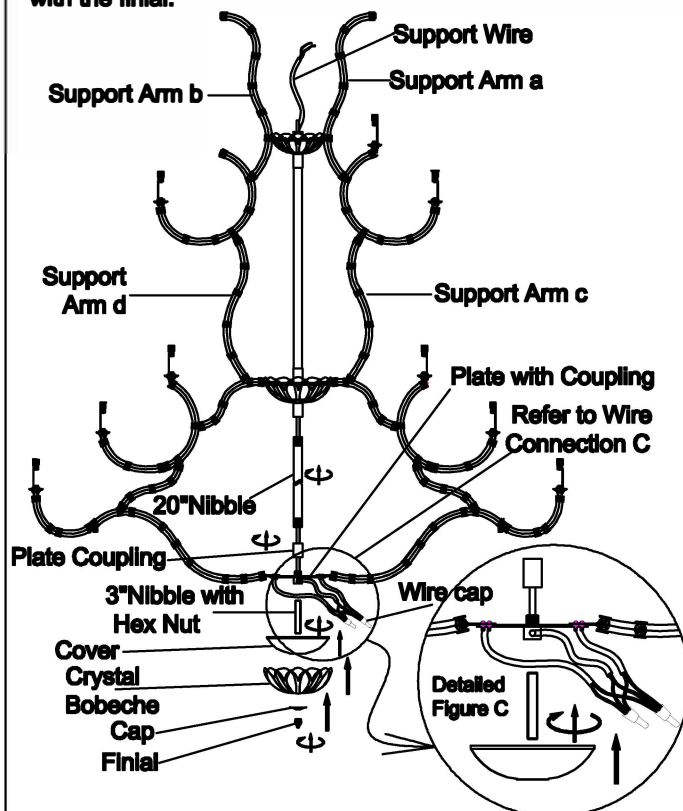

WIRE CONNECTIONS A

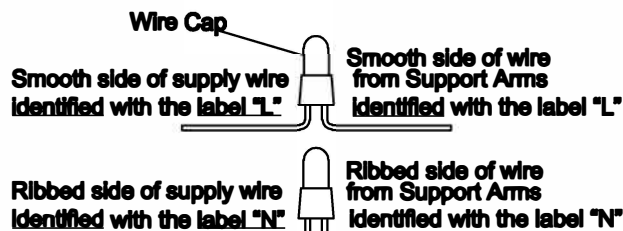

WIRE CONNECTIONS B

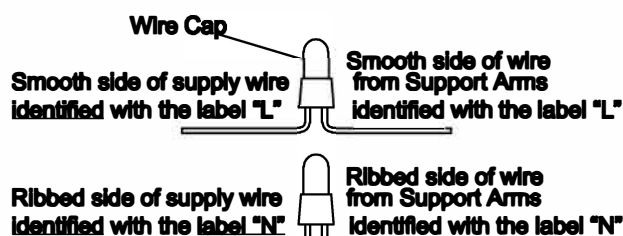

WIRE CONNECTIONS C

Figure 2

STEP 3 - Install the Crossbar to the Ceiling

- Place the crossbar to the ceiling and make (4) marks from the holes of the crossbar on the ceiling for anchors. Remove the crossbar and drill proper holes from the (4) marks for anchors.
- Insert anchors into drilled holes properly. Place the crossbar, flat washers and spring washers onto the anchors and secure with hex nuts. Hand tighten until snug with pliers.


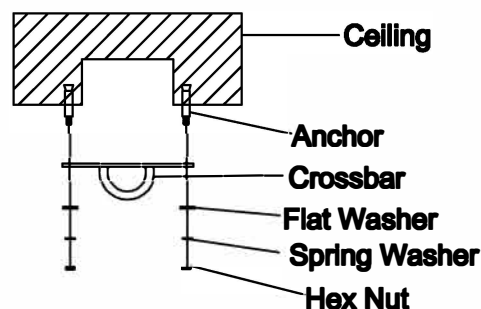


Figure 3


STEP 4 - Install Chain System and Fixture Body together

- A. Remove the bolt from the quick connector. Place the quick connector onto the chain link of the bottom end of the chain system.
- B. Place the fixture loop inside of the quick connector. Thread the bolt back onto the quick connector and the fixture loop. Hand tighten until snug to connect the chain system to the fixture.

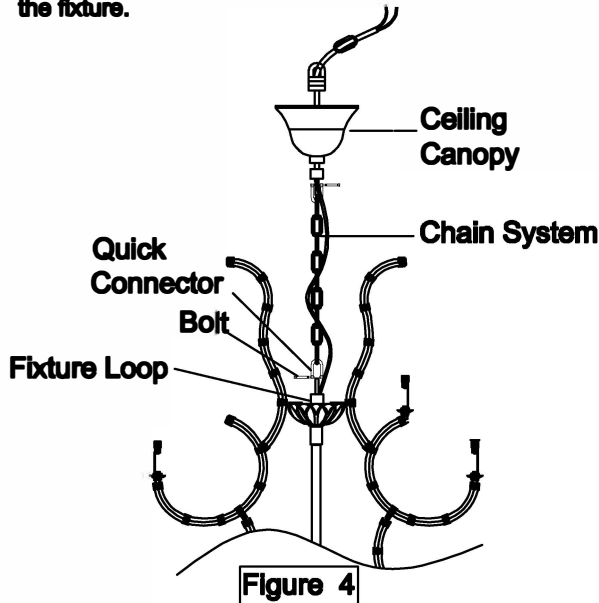

STEP 5 - Install Fixture to Crossbar


- A. Remove the bolt from the quick connector. Place the quick connector onto the hook of the crossbar.
- B. Insert the loop on the top end of the chain system inside of the quick connector. Thread the bolt back onto the quick connector and through the loop of the chain system. Hand tighten until snug to hang the fixture safely.
- C. Refer to Step 6 for wire connection instructions.
- D. Lift the ceiling canopy upward, over the crossbar, attach onto the ceiling. Using screwdriver, thread set screw on the ceiling canopy until snug to secure the ceiling canopy.

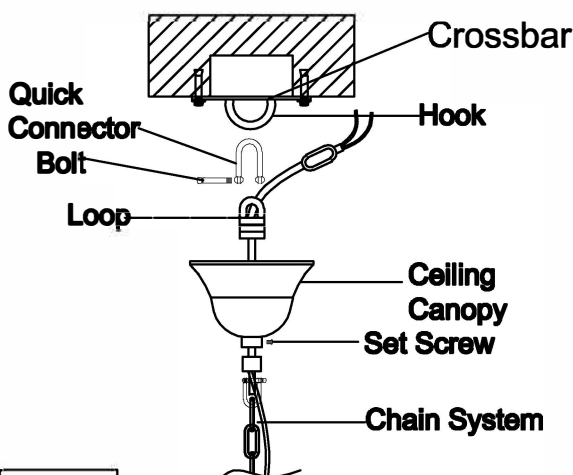

STEP 6 - Making the Wire Connections


- A. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into outlet box.

Note: If the electrical wire is going to be cut shorter than provided you will need to identify the "L" line wire and the "N" neutral wire before you cut the excess wire off. One is labeled N and the other labeled L. To do this separate the "L" line wire and the "N" neutral wire as far as you need to. Re-label the wire near where you want to make the cut. Be sure to mark the wire on the side of the fixture and not on the excess wire being cut and removed.

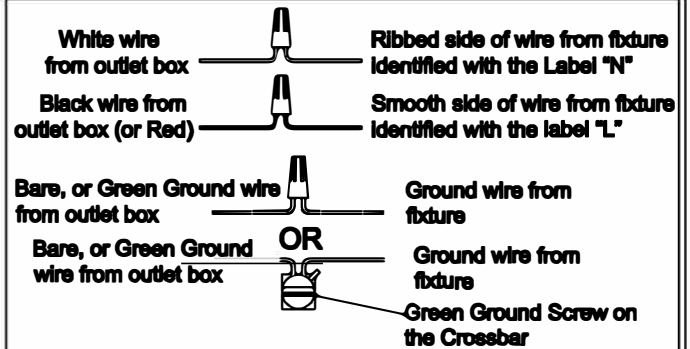

STEP 7 - Install Bobeches and Candle Covers

- A. Place bobeches and candle covers over sockets as shown.

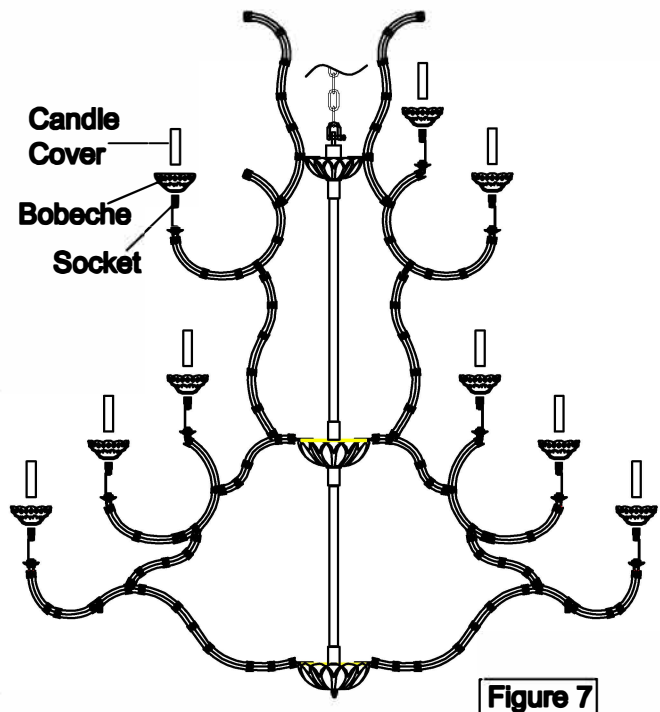

STEP 8 - Attach Crystals, Crystal Strings and Install Bulbs

A. Attach crystals, crystal strings onto support arms, bobeches and bottom center of finials as shown in the illustration.

B. Install bulbs onto sockets and push snugly into place.

