Ensemble™ Medley®
60" x 32" Bath/Shower
71320120

Features
- Modular design allows it to be moved around corners and through doorways with ease.
- Durable high gloss finish.
- Innovative Dry-Block™ seal and channeled water containment system form watertight seams.
- Clean, contemporary design with ample shelving.
- 2" (51 mm) wainscot/tile ledge.
- 18" (457mm) bath depth (floor to top of threshold).
- 60" (1524 mm) x 32" (813 mm) x 75" (1905 mm) complete unit finished dimensions.

Material
- Compression molded from our exclusive solid Vikrell® material.

Installation
- Tongue-and-groove four piece modular design allows for easy snap together installation.
- Caulk-free installation.

Components
Product includes:
   71324100 60" x 32" Medley™ Bath/Shower Wall Set
   71121120 32" (813 mm) Bath

Codes/Standards
CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
Greenguard UL 2818 - Gold
HUD, UM Bulletin 73

STERLING® Warranty - Fixtures Made of Solid Vikrell Material
See website for detailed warranty information.

Available Color/Finishes
Color tiles intended for reference only.

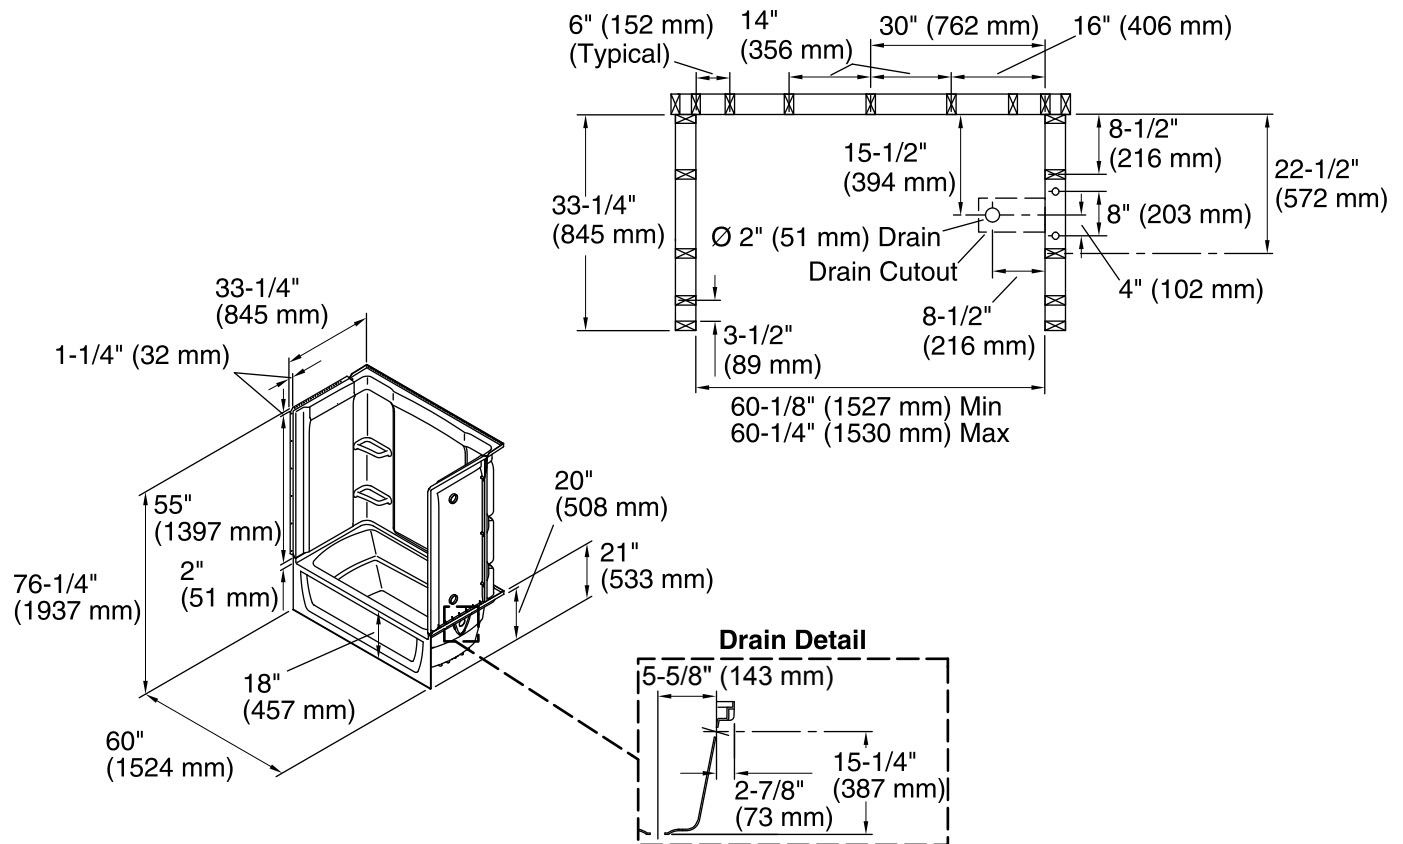| Color	Code	Description
	0	White
	96	KOHLER Biscuit

USA/Canada: 1-800-STERLING (1-800-783-7546)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.sterlingplumbing.com.
9-4-2017 03:02

6" (152 mm) (Typical)

14" (356 mm)

30" (762 mm)

16" (406 mm)

33-1/4" (845 mm)

15-1/2" (394 mm)

8-1/2" (216 mm)

22-1/2" (572 mm)

8" (203 mm)

Ø 2" (51 mm) Drain

Drain Cutout

4" (102 mm)

3-1/2" (89 mm)

8-1/2" (216 mm)

60-1/8" (1527 mm) Min
60-1/4" (1530 mm) Max

33-1/4" (845 mm)

1-1/4" (32 mm)

55" (1397 mm)

2" (51 mm)

76-1/4" (1937 mm)

18" (457 mm)

60" (1524 mm)

20" (508 mm)

21" (533 mm)

Drain Detail

5-5/8" (143 mm)

15-1/4" (387 mm)

2-7/8" (73 mm)

Technical Information
All product dimensions are nominal.

Installation:	3-Wall Alcove
Drain location:	Right
Basin area, bottom:	42" x 20" (1067 mm x 508 mm)
Basin area, top:	54" x 26" (1372 mm x 660 mm)
Water depth:	13-3/4" (349 mm)
Water capacity:	55 gal (208.2 L)
Minimum flat for door:	3" (76 mm)
Door height required:	56-3/4" (1441 mm)
Door width required:	57-11/16" (1465 mm)

Notes
Install this product according to the installation instructions.

Studs should be positioned roughly as shown.

Double studding is recommended for pivot shower door installations.

USA/Canada: 1-800-STERLING (1-800-783-7546)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.sterlingplumbing.com.

9-4-2017 03:02