

5' BubbleMassage™ Whirlpool Bath K-1122-XHGLA

GREENGUARD PROSUCT CERTIFICATOR LOW-CHARLE AL EMPSIONS UL 2019 UL 2019

Features

- The K-1122-XHGLA bath offers both a whirlpool hydromassage and BubbleMassage air bubbles for a truly relaxing bathing experience.
- 118 airjets release thousands of bubbles that surround, support, and massage the body.
- Variable-speed blower lets you adjust massage intensity to 18 levels.
- Single-speed whirlpool offers performance and value, with 8 fully adjustable jets.
- Hydromassage flow and direction can be controlled at each jet.
- Built-in heater.
- Comfort Depth® design offers a convenient 19-inch step-over height while retaining the same depth as a standard 21-inch bath.
- Molded lumbar support offers extra comfort while bathing.
- Slotted overflow allows for deep soaking.
- Integral apron.
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation.
- Textured bottom surface.
- Left-hand drain.
- Coordinates with other products in the Archer collection.

Material

Acrylic

Hydrotherapy

- BubbleMassage
- Whirlpool

Installation

Three-wall alcove.

Additional Hydrotherapy Options

- Soaking Bath K-1123-LA
- Soaking Bath + Bask heated surface K-1123-LAW
- BubbleMassage air bath K-1122-GLA
- BubbleMassage air bath + Bask heated surface K-1122-GLAW
- VibrAcoustic K-1122-VBLA
- VibrAcoustic + Bask heated surface K-1122-VBLAW
- Whirlpool K-1122-LA
- Whirlpool + heater K-1122-HL
- Whirlpool + Bask heated surface K-1122-LAW
- Whirlpool + BubbleMassage air bath K-1122-XHGLA

Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

ADA

Codes/Standards

ASME A112.19.7/CSA B45.10 CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 UL 1795 Greenguard UL 2818 - Gold ADA ICC/ANSI A117.1

KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty KOHLER® Hydrotherapy Components Five-Year Limited Warranty


See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar











Archer®


5' BubbleMassage™ Whirlpool Bath K-1122-XHGLA

No change in measurements if connected with drain illustrated. (K-7271 or K-7272)



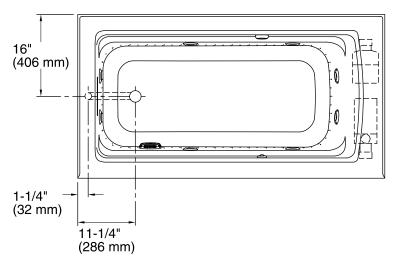

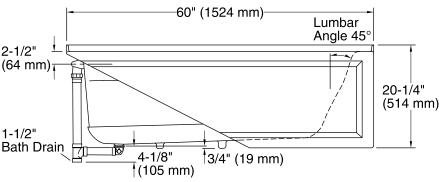



Required Electrical Service

Three dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Blower: 120 V, 15 A, 60 Hz Pump: 120 V, 15 A, 60 Hz Heater: 120 V, 15 A, 60 Hz

Technical Information

All product dimensions are nominal.

Installation: Three-wall alcove

Drain location: Left

Basin area, bottom: 45-1/8" x 19-11/16" (1146 mm x 500 mm) Basin area, top: 52-3/4" x 25-5/16" (1340 mm x 643 mm)

Weight: 160 lbs (72.6 kg)
Minimum floor load: 52 lbs/ft² (253.9 kg/m²)

Water depth: 15" (381 mm)
Water capacity: 58 gal (219.6 L)

Electrical component Blower: 120 V, 10 A, 60 Hz rating: Pump: 120 V, 7 A, 60 Hz

Heater: 120 V, 12.5 A, 60 Hz, 1500 W

Blower speed: Variable

Notes


Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Remote blower installation kit is available for relocating the blower. Provide access for servicing the blower.

Do not relocate or alter the PVC tee or coiled flexible tubing connected to the blower. Follow the blower relocation instructions exactly. ADA compliant when installed to the specific

requirements of these regulations.



Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current Specification Sheet, go to $\underline{\text{www.kohler.com}}$.

