

Features

- Featuring ComforTrack™ Technology – a cushioned bottom track – allows for easier access to the bathing/showering space
- ComforTrack™ enables you to sit, lean or kneel on the bottom track of the door to easily bathe children or clean the showering/bathing space
- 3/16" thick glass available in Clear, Pebbled, Frosted, and Templar

Material


- Anodized aluminum hardware prevents rusting or Corrosion
- Tempered glass ensures maximum safety and durability

Installation

- Out-of-plumb adjustability allows for easy installation

Components


Additional included component/s: Hardware Kit.

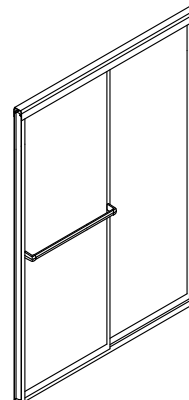


Codes/Standards

ANSI Z97.1 (Tempered Glass)
CPSC 16CFR 1201 Cat II

See website for detailed warranty information.

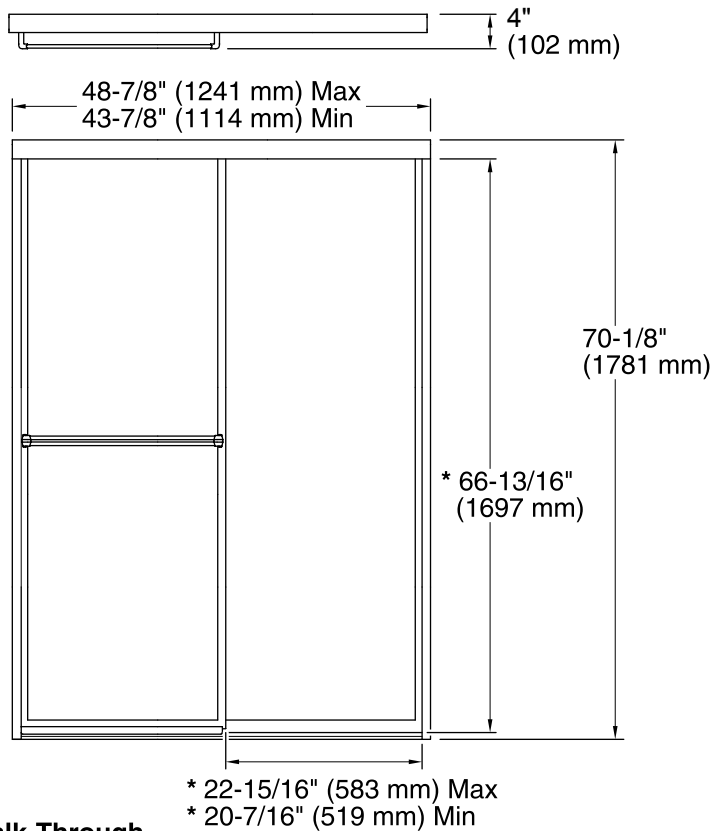

* Walk-Through

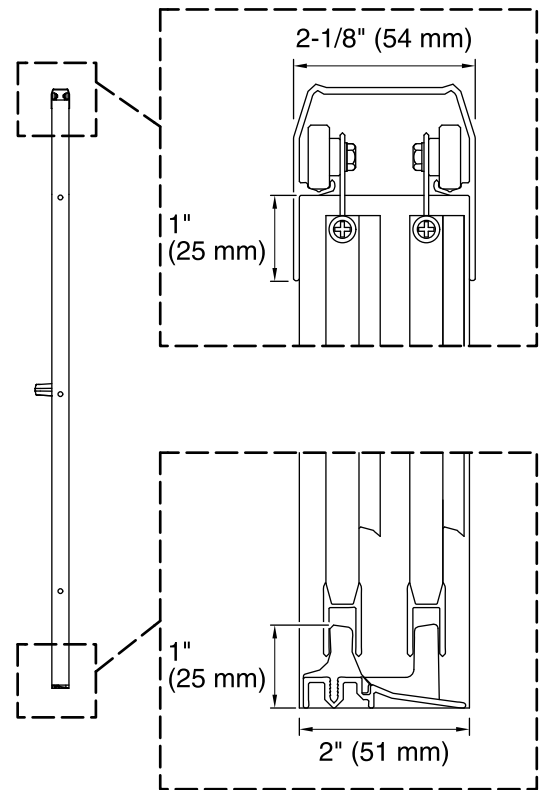

Notes

Install this product according to the installation guide.

Technical Information

All product dimensions are nominal.

Frame material: Aluminum

Opening style: Sliding/Bypass

Opening Width - Min: 43-7/8" (1114 mm)

Opening Width - Max: 48-7/8" (1241 mm)

Walk-through - Min: 20-7/16" (519 mm)

Walk-through - Max: 22-15/16" (583 mm)

Glass thickness: 3/16" (5 mm)