



Features

- Featuring ComforTrack™ Technology a cushioned bottom track allows for easier access to the bathing/showering space
- ComforTrack[™] enables you to sit, lean or kneel on the bottom track of the door to easily bathe children or clean the showering/bathing space
- 3/16" thick glass available in Clear, Pebbled, Frosted, and Templar

Material


- Anodized aluminum hardware prevents rusting or Corrosion
- Tempered glass ensures maximum safety and durability

Installation

Out-of-plumb adjustability allows for easy installation

Components


Additional included component/s: Hardware Kit.



Codes/Standards ANSI Z97.1 (Tempered Glass) CPSC 16CFR 1201 Cat II

See website for detailed warranty information.



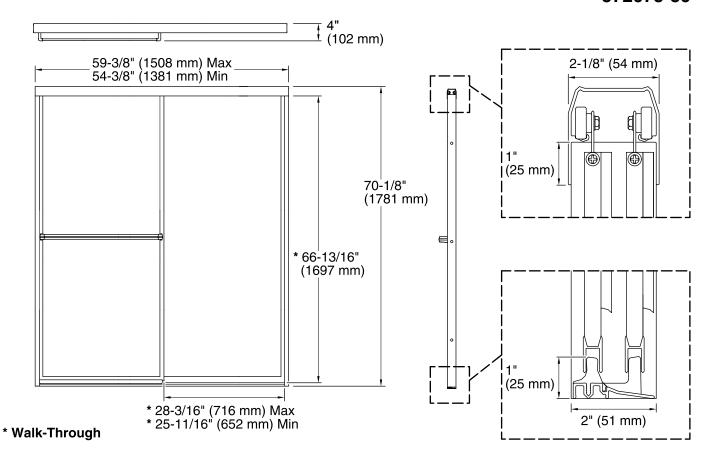

Technical Information

All product dimensions are nominal.

Frame material: Aluminum

Opening style: Sliding/Bypass

Opening Width - Min: 54-3/8" (1381 mm)

Opening Width - Max: 59-3/8" (1508 mm)

Walk-through - Min: 25-11/16" (652 mm)

Walk-through - Max: 28-3/16" (716 mm)

Glass thickness: 3/16" (5 mm)

Notes

Install this product according to the installation guide.