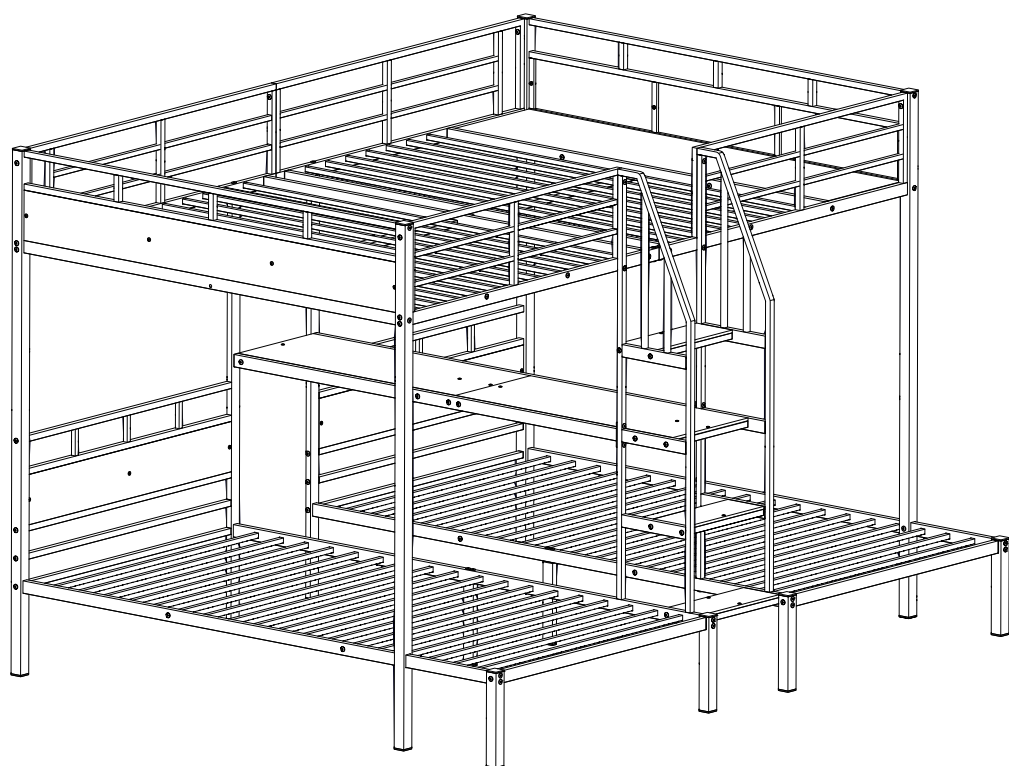


Assembly instructions

Product code: BW00554AAB

Queen over (Twin + Twin)



SAFETY WARNINGS AND GENERAL NOTES:

1. Follow the information on the warnings on the bunk bed end structure and on the carton. Do not remove the warning label from the bed.
2. Always use the recommended size mattress on mattress support, or both, to help prevent the likelihood of entrapment or falls.
3. Do not allow children under 6 years of age to use the upper bunk.
4. Periodically check and ensure the guardrail, ladder and other components are in their proper position, free from damage, and all connectors are tight.
5. Do not allow horseplay on or under beds.
6. Always prohibit jumping on the bed.
7. Prohibit more than one person on upper bunk.
8. Always use the ladder for entering and leaving the upper bunk.
9. Do not use substitute parts. Contact the manufacturer or dealer for replacement parts.
10. Use of a night-tight may provide added safety precaution for a child using the upper bunk.
11. Always use guardrails on both long sides of the upper bunk.
12. If the bunk bed will be placed next to a wall, the guardrail that runs the full length of the bed should be placed against the wall to prevent entrapment between the bed and the wall.

The use of water or sleep flotation mattresses is prohibited.

13. **STRANGULATION HAZARD**-Never attach or hang items to any part of the bunk bed that are not designed for use with the bed ; for example, but not limited to, hooks, belts and jump ropes.
14. Keep these instructions for future reference.
15. We recommend assembling your bunk bed on the shipping carton to protect your floor or carpet.
16. Be certain all staples are out of the box before beginning assembly on the shipping carton.
17. USE ONLY MATTRESSES WHICH ARE AS THE TABLE BELOW ON UPPER AND ON LOWER BUNKS.

Down bed

Bed type	Length	Width	Thickness
Twin Standard	74" - 75"	38 ½"	8" max

Up bed

Bed type	Length	Width	Thickness
Queen Standard	79" -80"	60 ½"	6" max

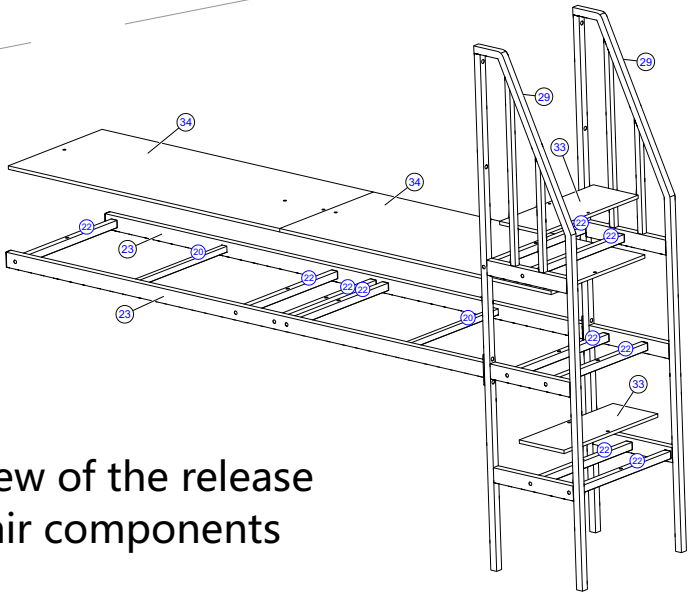
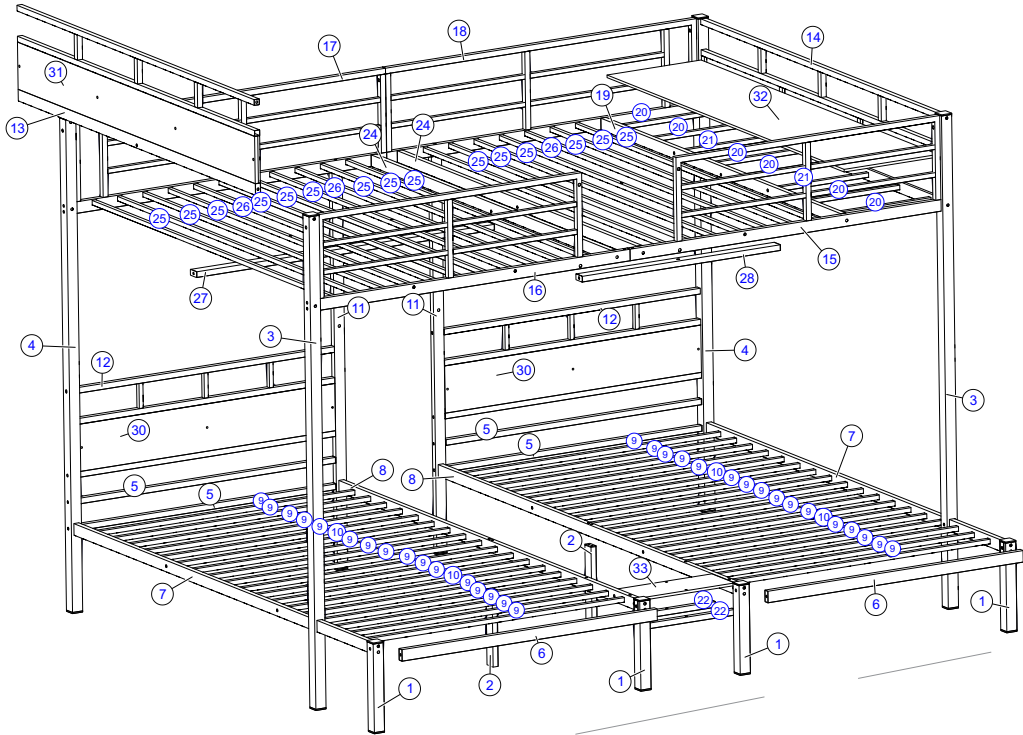
(A storage board has been added, so you can put both the twin mattress and the twin xl mattress, and there is also an additional storage space.)

18. SURFACE OF MATTRESS MUST BE AT LEAST 5"(127MM) BELOW THE UPPER EDGE OF GUARDRAILS.

19. Replacement Parts:























Replacement Parts, including additional guardrails, may be obtained from any of our (Shenzhen Yuefeng Zhiqi Technology Co., Ltd) dealers.

Release preview of bed components








Preview of the release of stair components

List of components





							
1-4pcs					7-2pcs	9-32pcs	
							
2-2pcs	3-2pcs	4-2pcs	5- 4pcs	6-2pcs	8-2pcs	10-4pcs	11-2pcs
							
12-2pcs	13-1pcs	14-1pcs	15-1pcs				
							
16-1pcs	17-1pcs	18-1pcs	19-1pcs				
							
20-8pcs	21-2pcs	22-12 pcs	23-2pcs				
							
24-2pcs	25- 15pcs	26-3pcs	27-1pcs				
							
28-1pcs	29-2pcs						

Board list

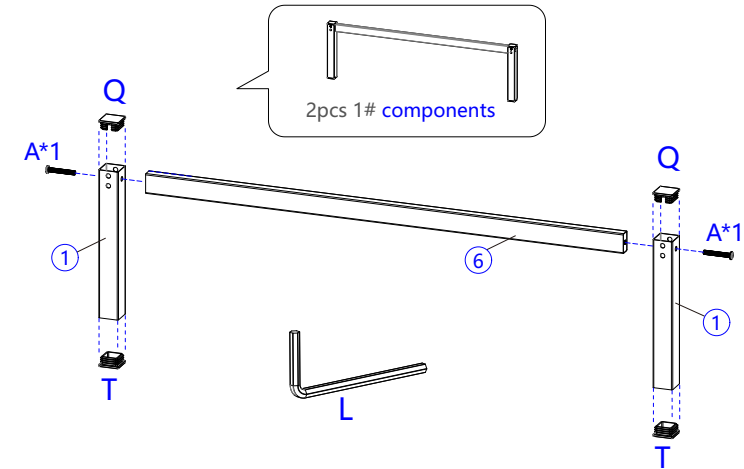
			
30-2pcs		31-2pcs	
			
32-1pcs	33-3pcs	34-2pcs	


A total of 10pcs

HARDWARE LIST

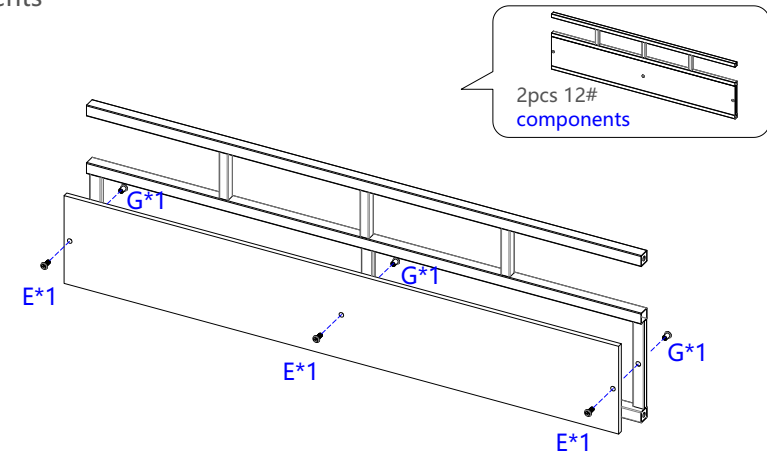
						
A	B	C	D	E	F	G
M8*55-62pcs	M8*30-48pcs	M8*15-24pcs	ΦM8*16-16pcs	M6*15-20pcs	M6*25-12pcs	ΦM6*10-26pcs
						
T	Q	Y	H	L	M	k
40*40F-8pcs	40*40FQ-8pcs	20*40-4pcs	18*60 -3pcs	M5*25-2pcs	M4*25-2pcs	2pcs



Step 1: Use hardware A, F, Q, L to connect #1 and #6 together. Get 2 1# components



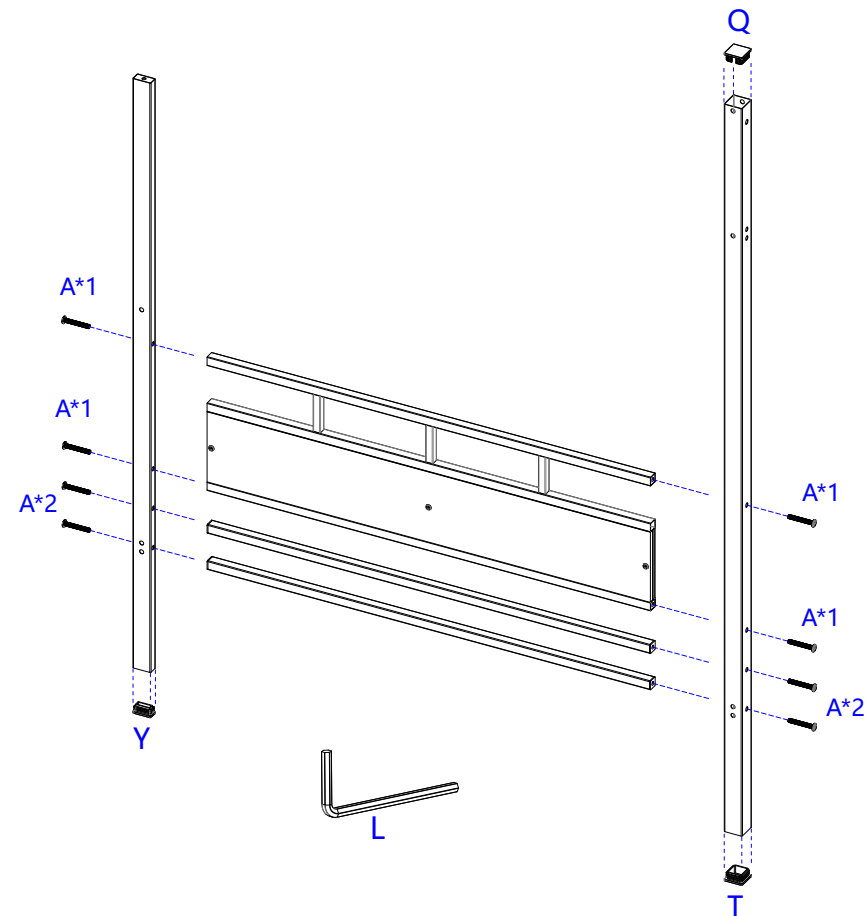
				
6-2pcs	1-4pcs	40*40F-4pcs	40*40FQ-4pcs	A M8*55-4pcs



Step 2: Use hardware E, G, M to connect #12 and #30 together. Get 2 12# components



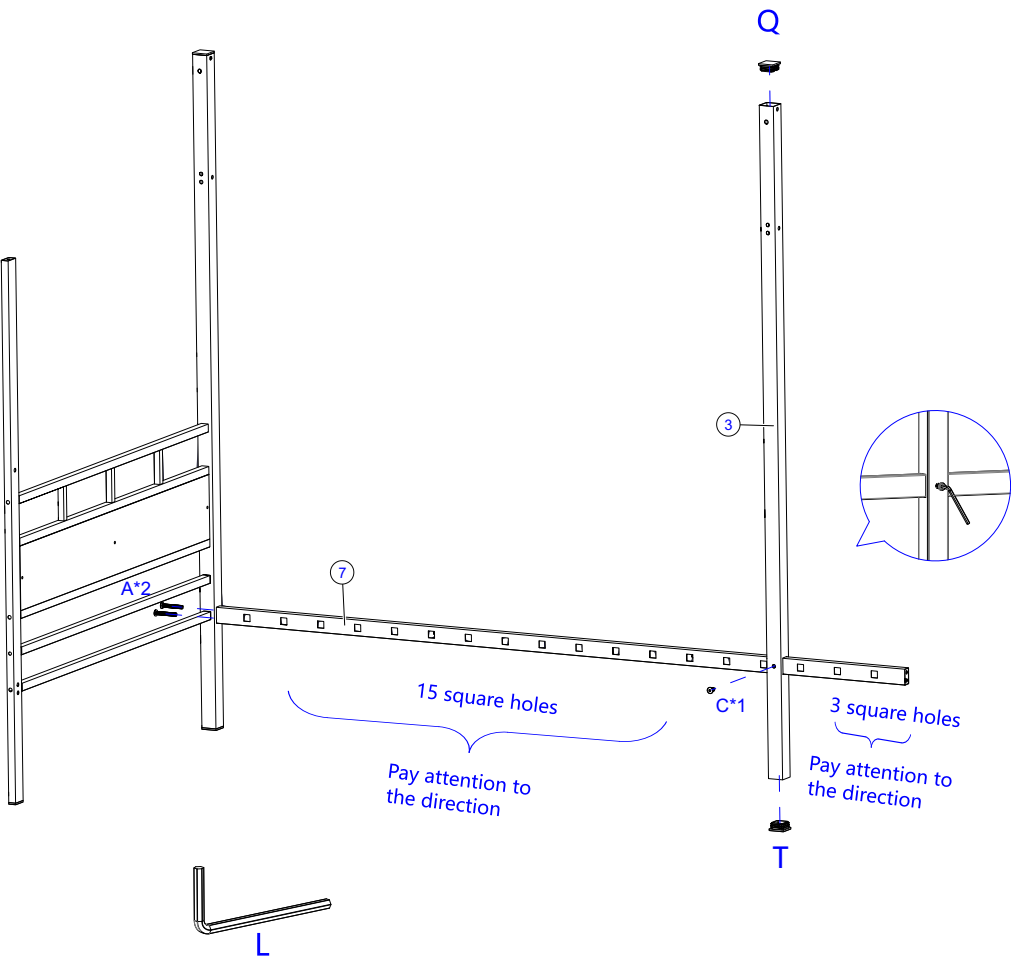
				
12-2pcs	30-2pcs	E M6*15-6pcs	G ΦM6*10-6pcs	M



Step 3: Use hardware A,Q, Y ,F, L to connect #4,#11,#5 and #12 components together.



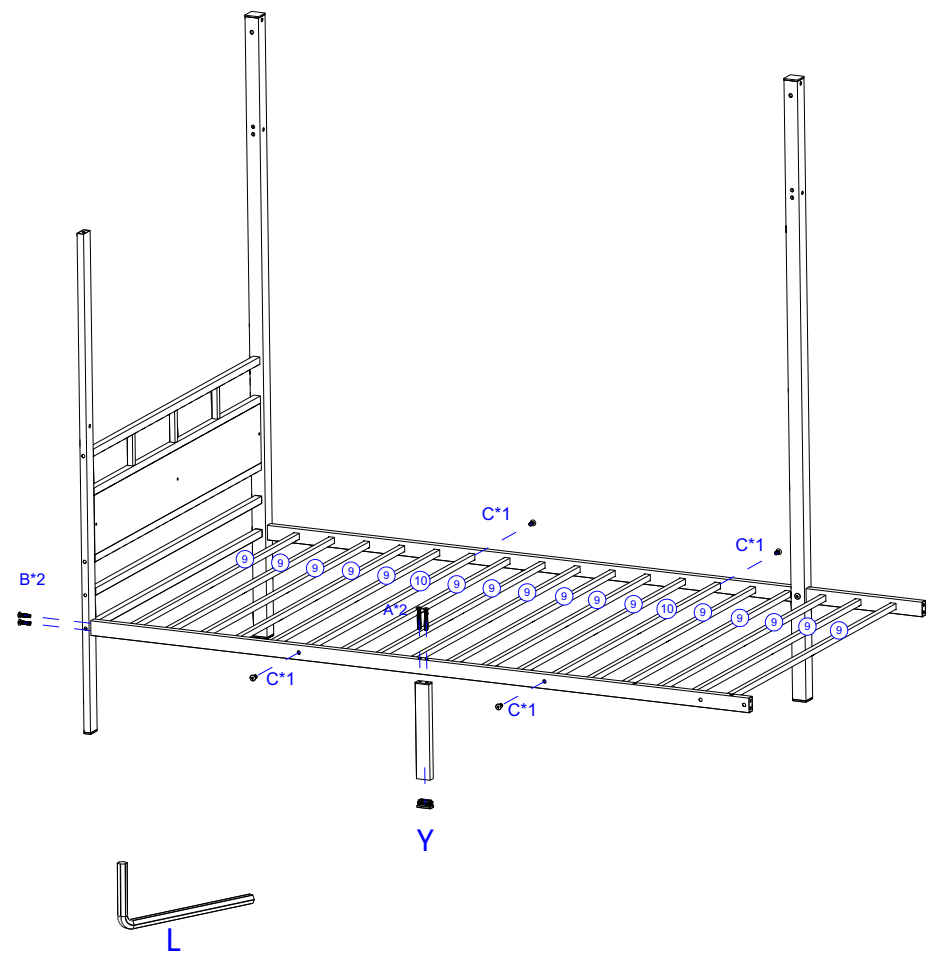
 4-1pcs	 11-1pcs	 1pcs 12# components	 40*40F-1pcs	 20*40-1pcs
		 5-2pcs	 40*40FQ-1pcs	 M8*55-8pcs





Step 4: Use hardware A,Q, C ,F, L to connect #3, and #7 together. Pay attention to the installation direction of hole #7



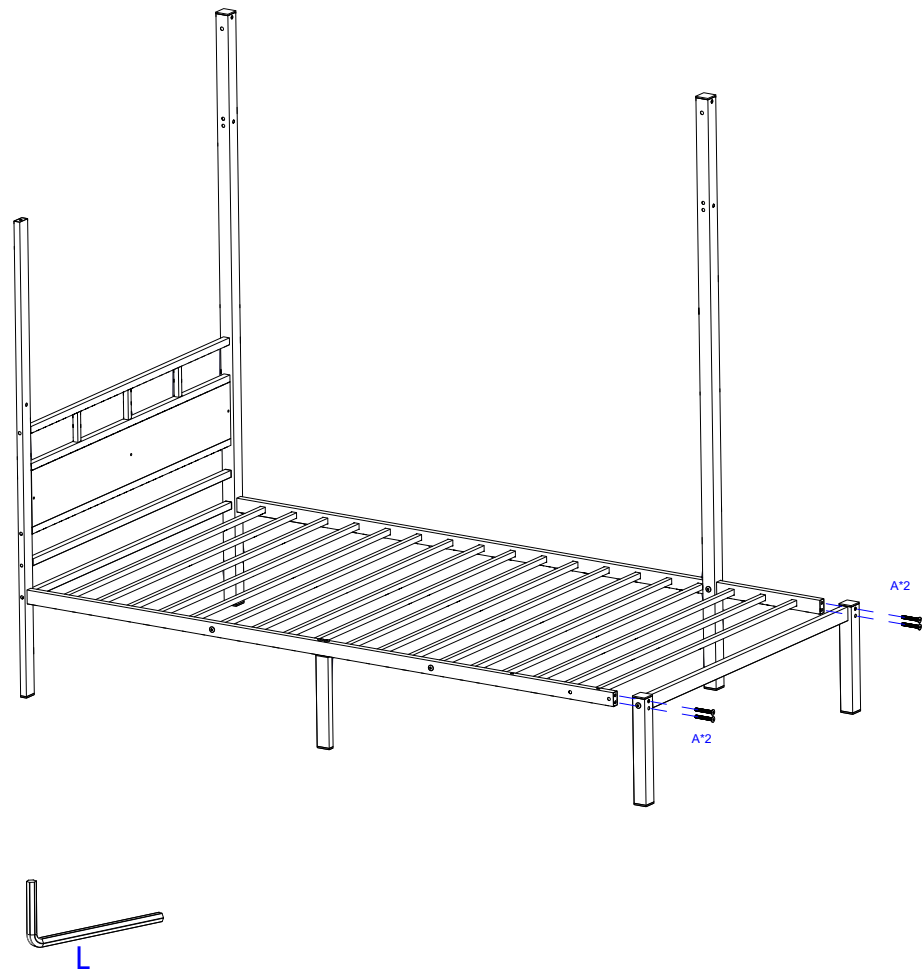
	 3-1pcs	 7-1pcs	 40*40F-1pcs	 M8*55-2pcs
			 40*40FQ-1pcs	 M8*15-1pcs

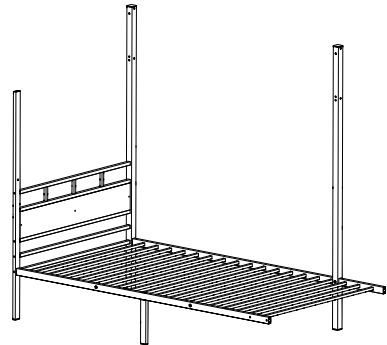
Step 5: Use hardware A, B,C,Y, L to connect #2, #8, #9 and #10 together.



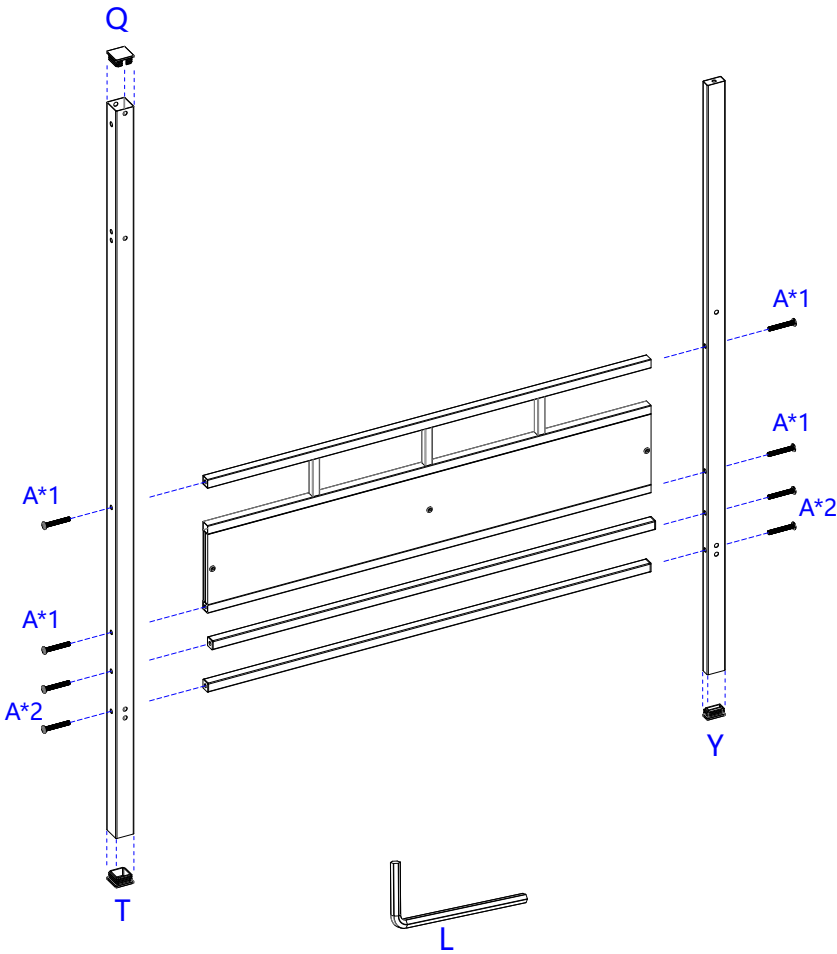
 2-1pcs	 9-16pcs	 8-1pcs	 20*40-1pcs	 A M8*55-2pcs
	 10-2pcs		 B M8*30-2pcs	 C M8*15-4pcs

Step 6: Use hardware A, L to connect 1# components together.



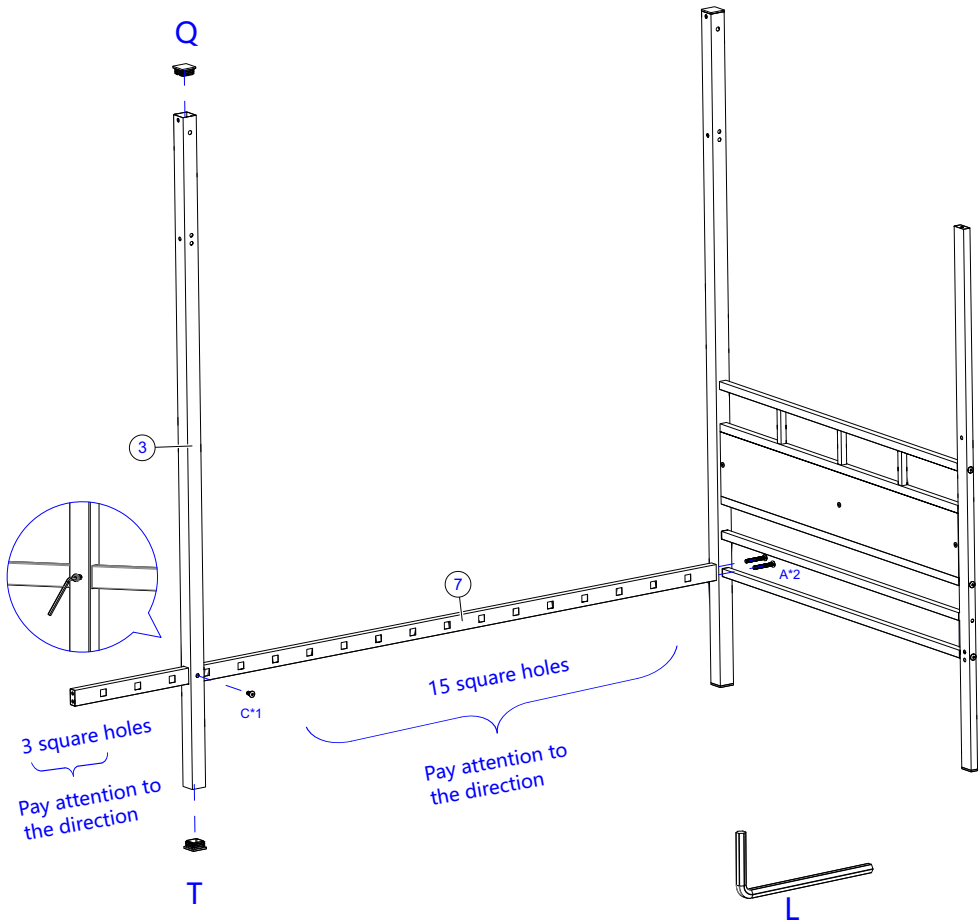
	 1# components	 A M8*55-4pcs
---	--	--

Step 7: Use hardware A,Q, Y, F, L to connect #4,#11,#5 and #12 components together.



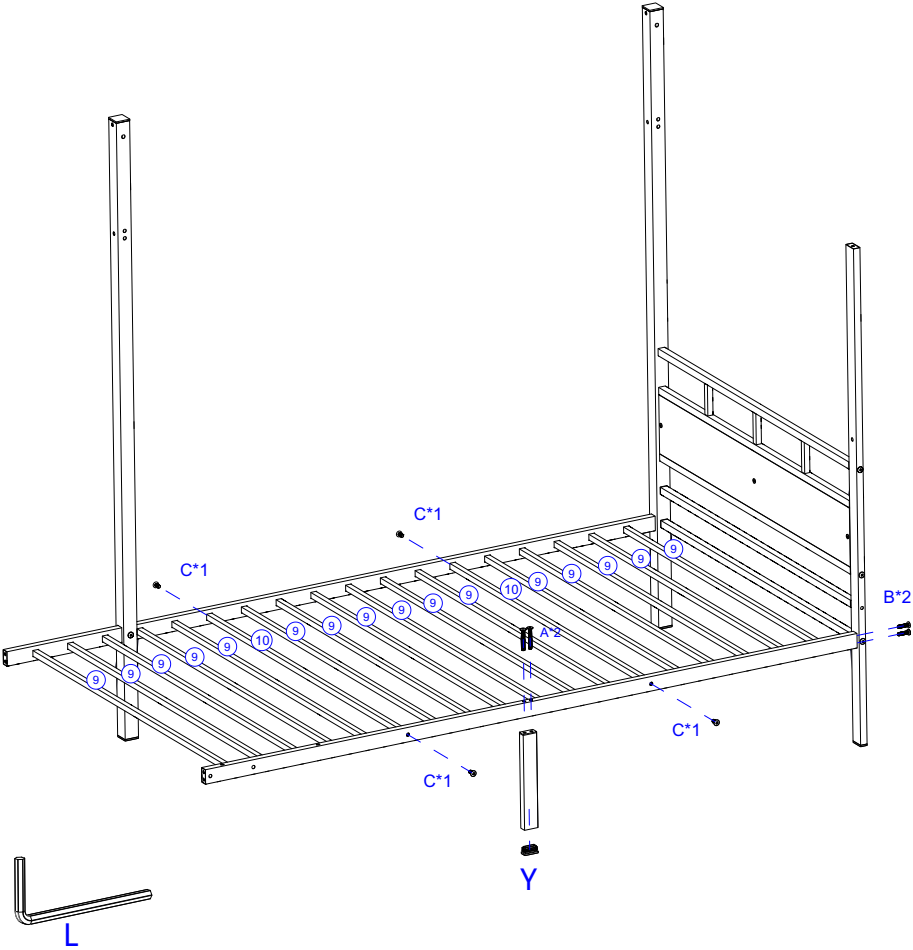
4-1pcs	11-1pcs	1pcs 12# components	40*40F-1pcs	20*40-1pcs
		5-2pcs	40*40FQ-1pcs	M8*55-8pcs





Step 8: Use hardware A,Q, C, F, L to connect #3, and #7 together. Pay attention to the installation direction of hole #7



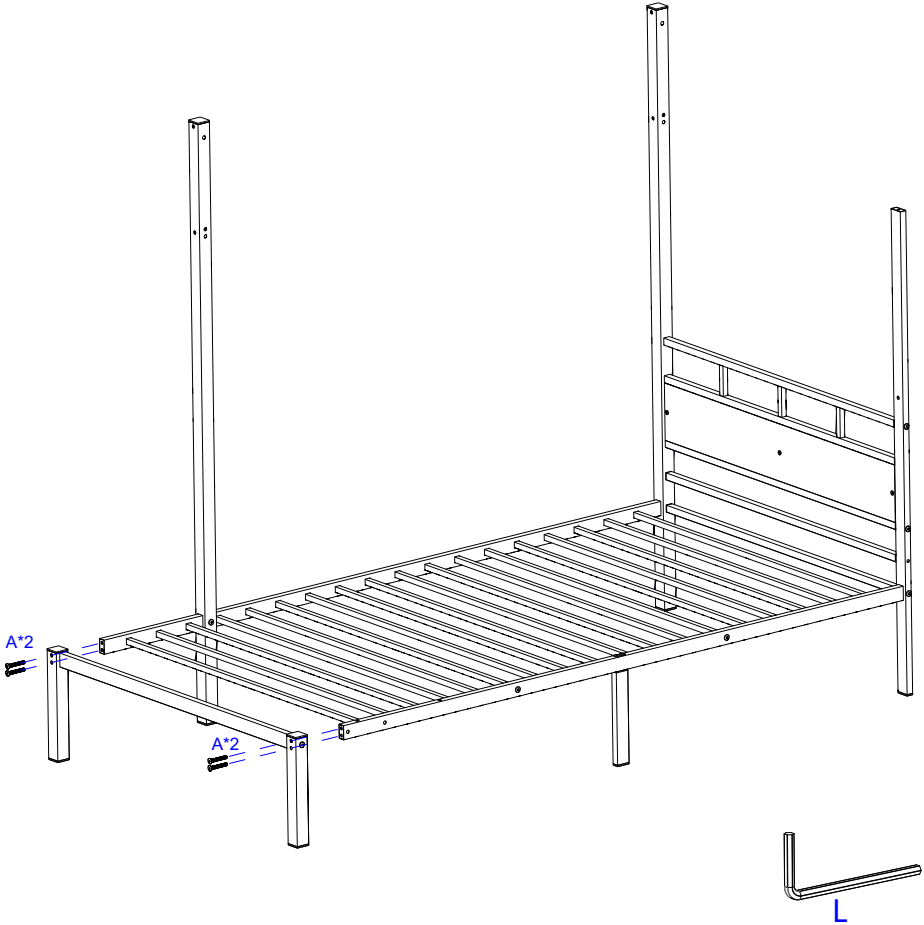
	3-1pcs	7-1pcs	40*40F-1pcs	M8*55-2pcs
			40*40FQ-1pcs	M8*15-1pcs

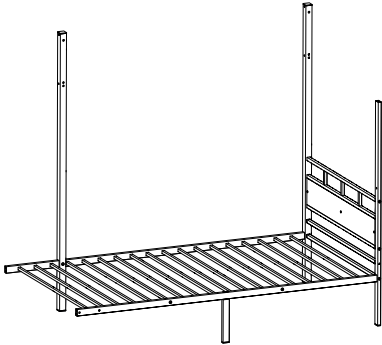
Step 9: Use hardware A, B,C,Y, L to connect #2, #8, #9 and #10 together.



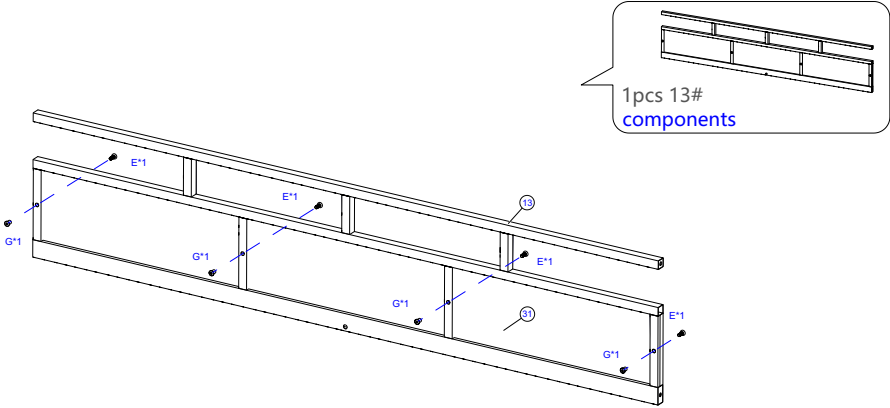
 2-1pcs	 9-16pcs	 8-1pcs	 20*40-1pcs	 A M8*55-2pcs
 10-2pcs			 B M8*30-2pcs	 C M8*15-4pcs

Step 10: Use hardware A, L to connect 1# components together.



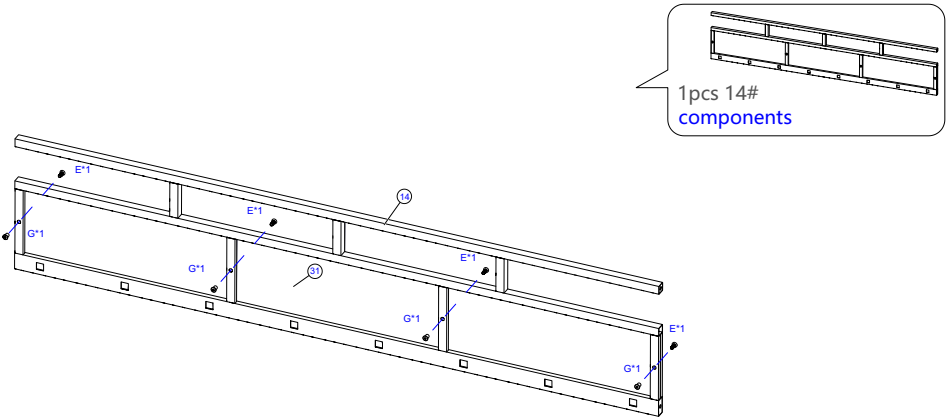
	 1# components	 A M8*55-4pcs
---	--	--

Step 11: Use hardware E, G, M to connect #13 and #31 together. Get 1 13# components



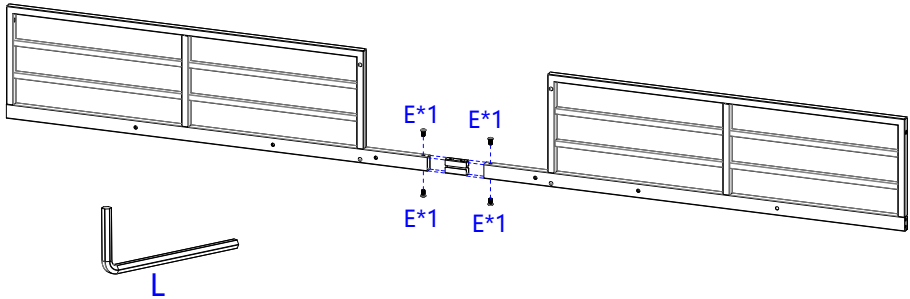
13-1pcs	31-1pcs	M6*15-4pcs	ΦM6*10-4pcs	

Step 12: Use hardware E, G, M to connect #14 and #31 together. Get 1 14# components



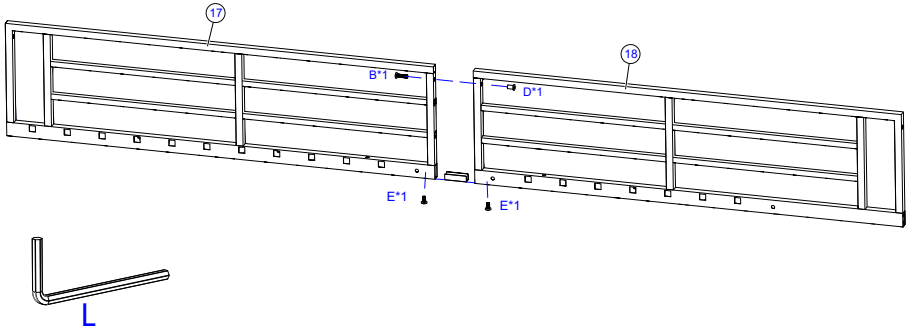
14-1pcs	31-1pcs	M6*15-4pcs	ΦM6*10-4pcs	

Step 13: Use hardware E, H, L to connect #15 and #16 together.



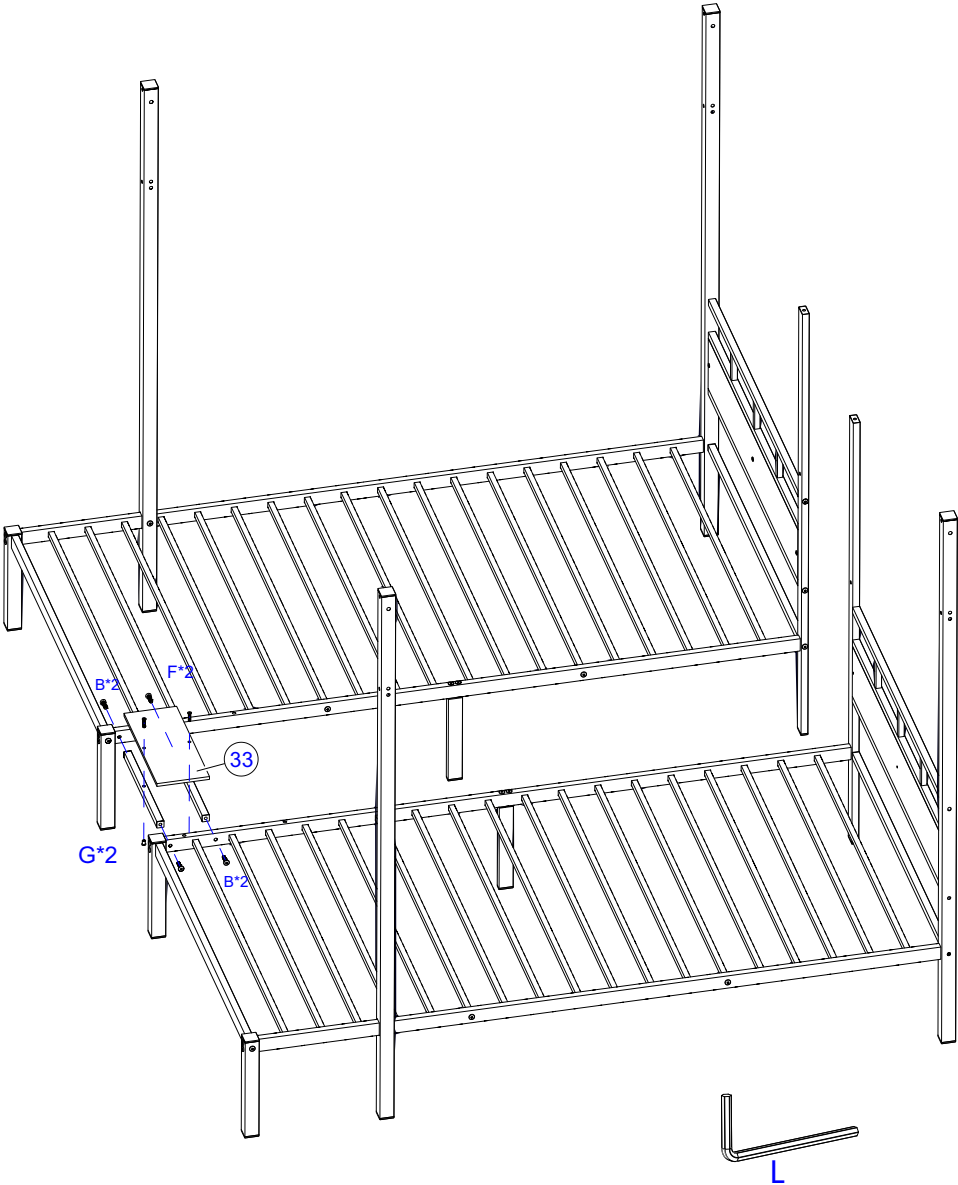
15-1pcs	16-1pcs	18*60 -2pcs	M6*15-4pcs


Step 14: Use hardware B, E, D, H, L to connect #17 and #18 together.



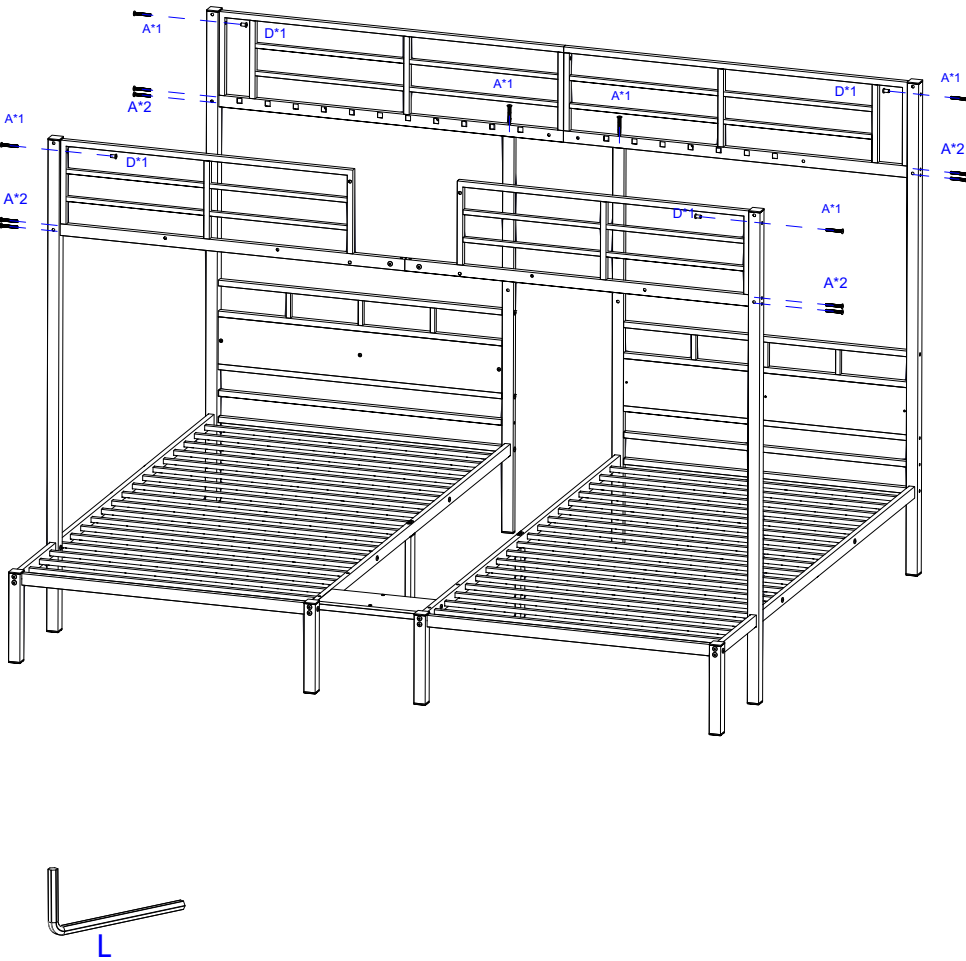
17-1pcs	18-1pcs	18*60 -1pcs	M8*30-1pcs	ΦM8*16-1pcs	M6*15-2pcs



Step 15: Use hardware B, F, M, L, G to connect #33 and #22 together.




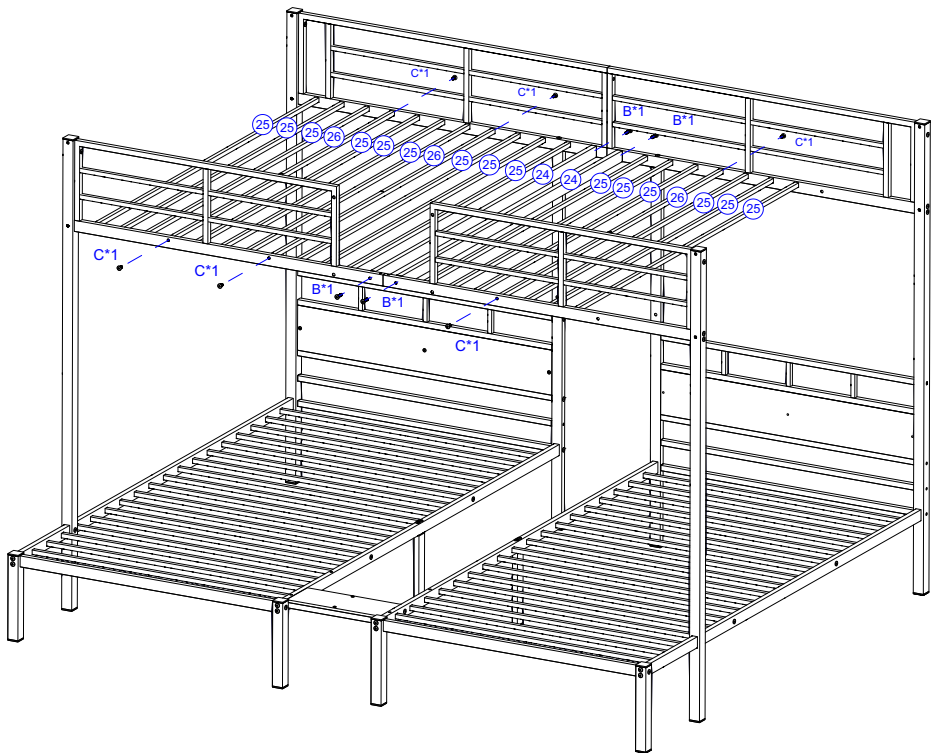
 33-1pcs	 22-2pcs	 B M8*30-4pcs	 F M6*25-2pcs	 G ΦM6*10-2pcs	 M
---	--	--	--	---	---






Step 16: Use hardware A, D and L to connect the previously assembled shelves #15, #16, #17 and #18




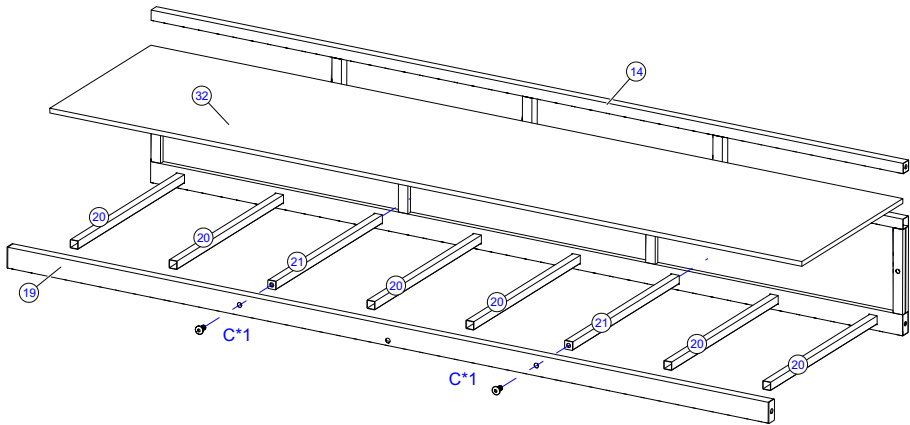
 A M8*55-14pcs	 D ΦM8*16-4pcs
---	---





Step 17: Insert #9 and #10 into the corresponding hole in order, and use hardware C and L to tighten the screws while inserting to prevent them from falling off.




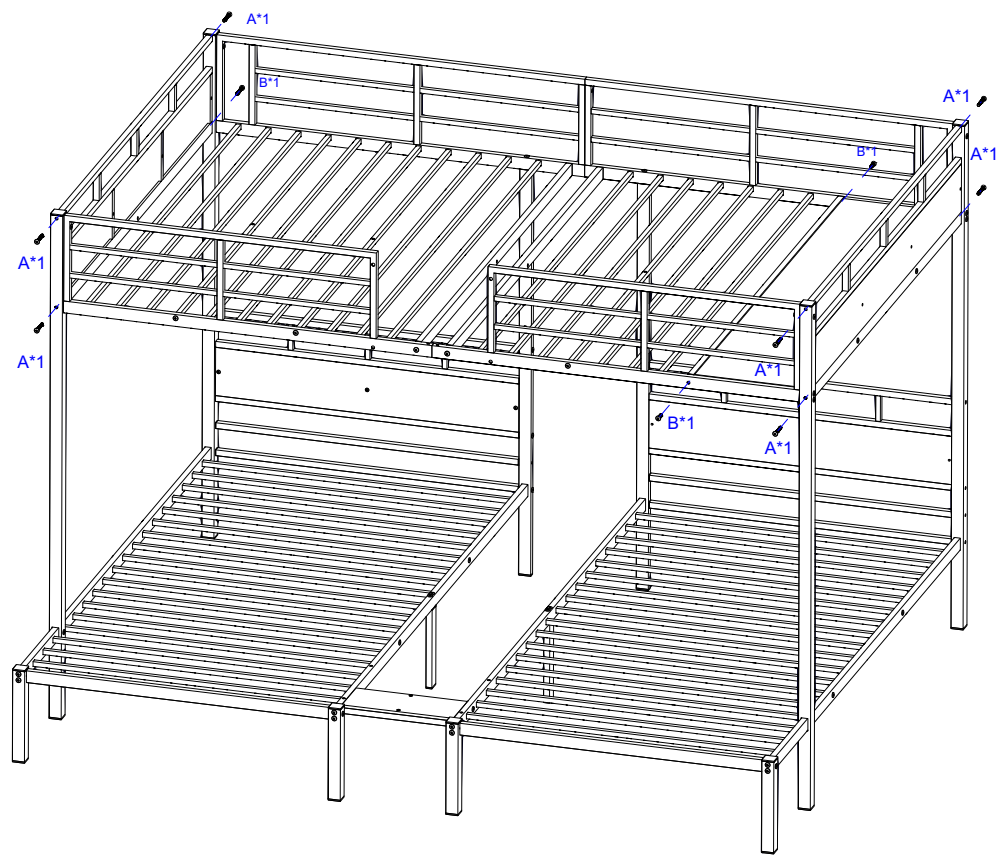
 25-15 pcs	 26-3 pcs	 24-2 pcs	 B M8*30-4 pcs	 C M8*15-6 pcs	 M
---	---	---	---	---	---

Step 18: Use hardware L , C to connect #32,#19,#20,#21 and #14components together.



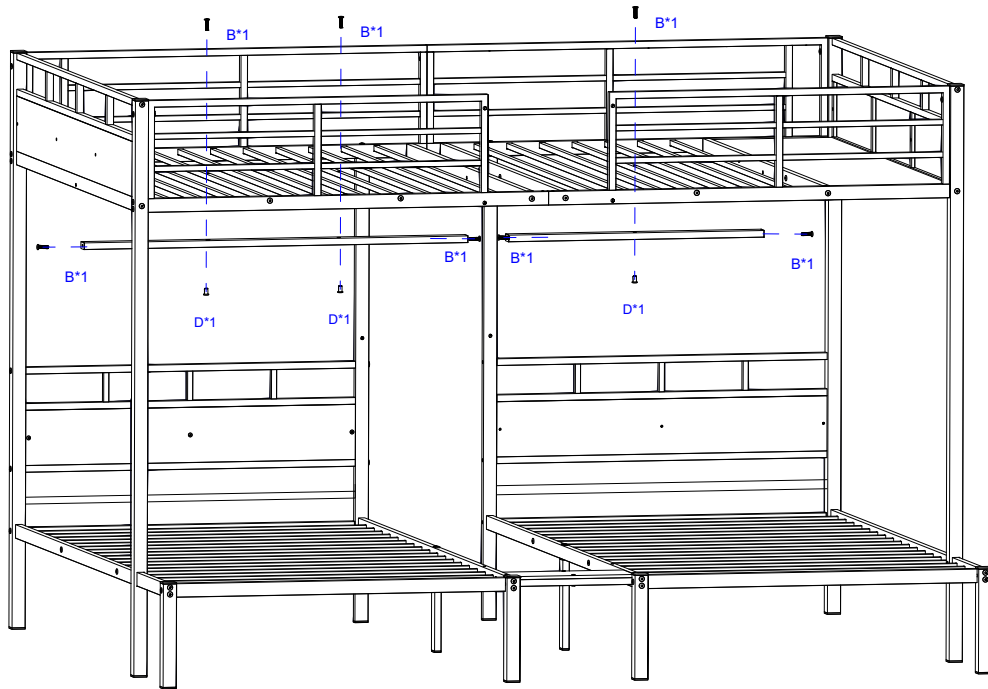
 1 pcs 14# components	 19-1 pcs	 32-1 pcs 59.84*14.17"
 20-6 pcs	 21-2 pcs	 C M8*15-4 pcs

Step 19: Use hardware A, B and L to connect step 18 components with #13 components.



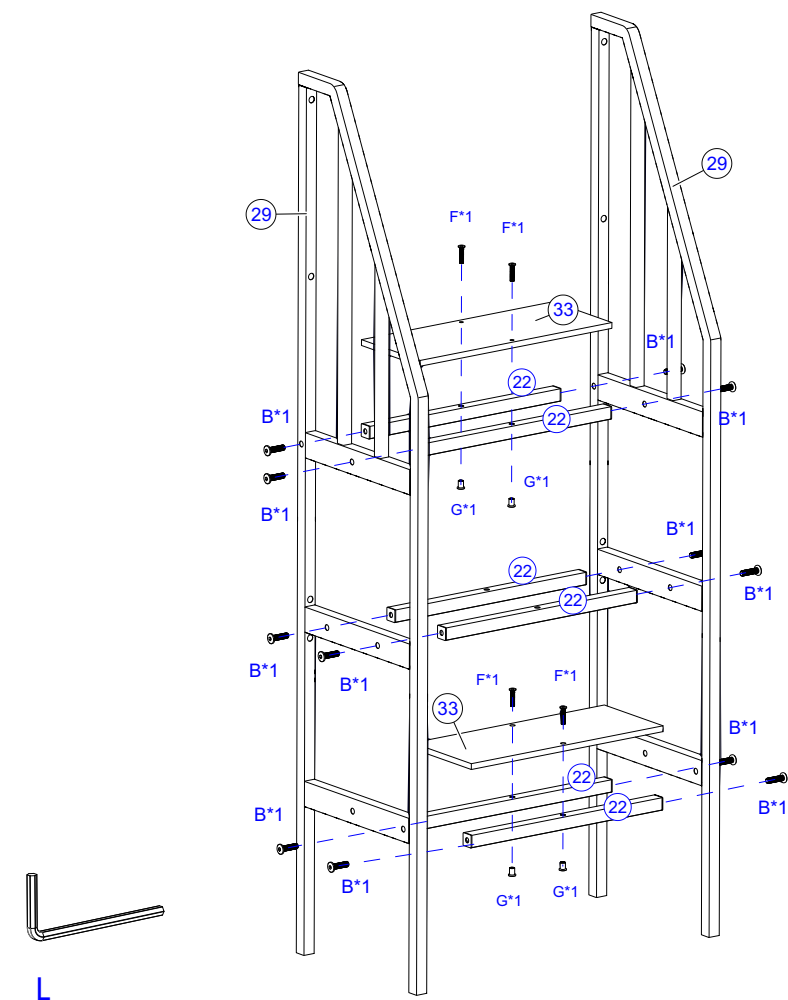
1pcs 13# components		A M8*55-8pcs	B M8*30-2pcs



Step 20: Use hardware B, D to connect #26,#27,#28 and #13 components together.



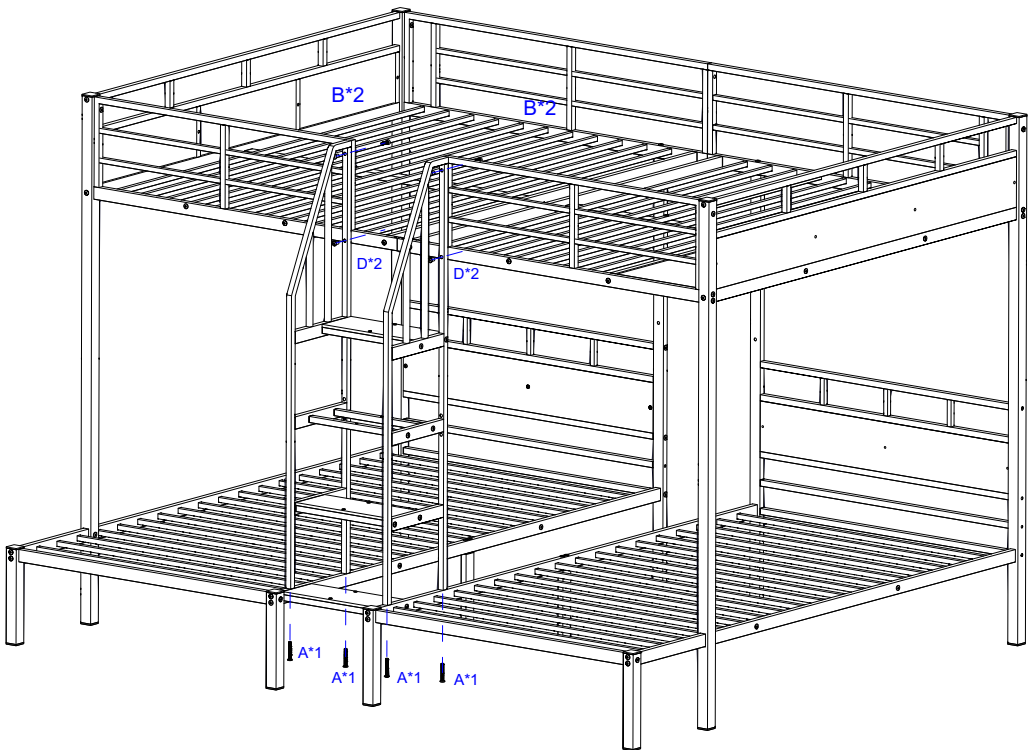
27-1pcs	28-1pcs	B M8*30-7pcs	D ΦM8*16-3pcs



Step 21: Use hardwareF, B, M, G, L to connect #33, #22and 2pcs Stair bracket together.Get 1pcs Stair components



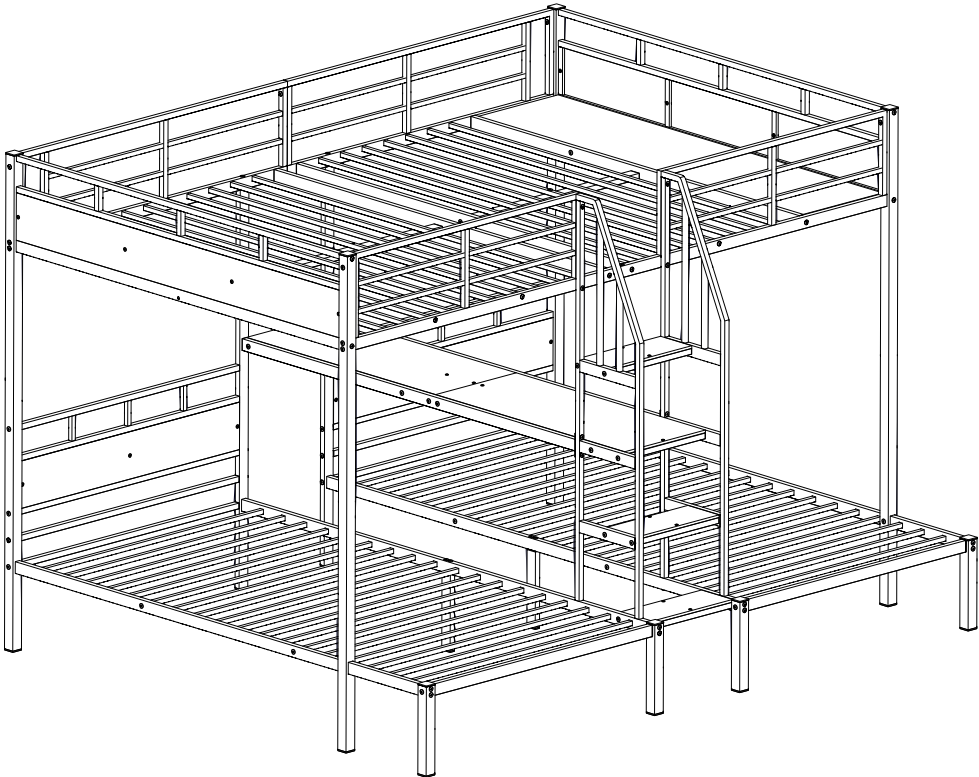
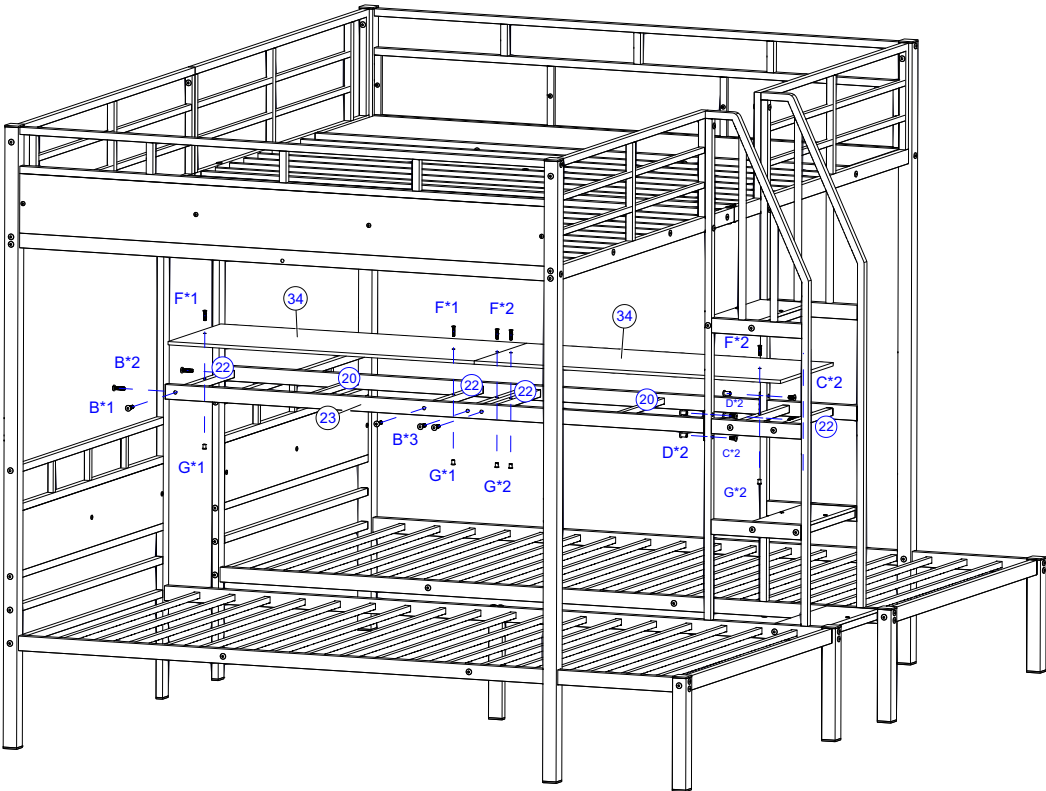
 2pcs Stair bracket	 14.17*5.75 " 33-2pcs	 B M8*30-12pcs	 M
	 22-6pcs		
		 F M6*25-4pcs	 G ΦM6*10-4pcs

Step 22: Use hardwareA, B, D, L to connect The stair components are combined with the bed connection.







 2pcs Stair bracket	 14.17*5.75 " 33-2pcs	 A M8*55-4pcs	 B M8*30-4pcs	 D ΦM8*16-4pcs


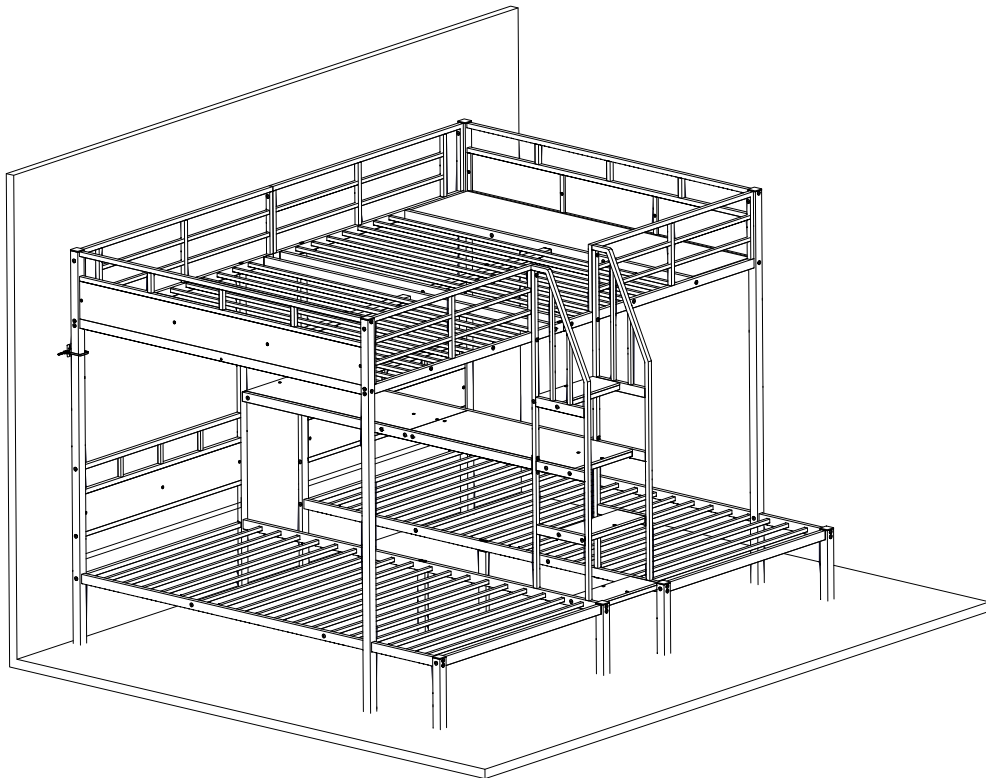
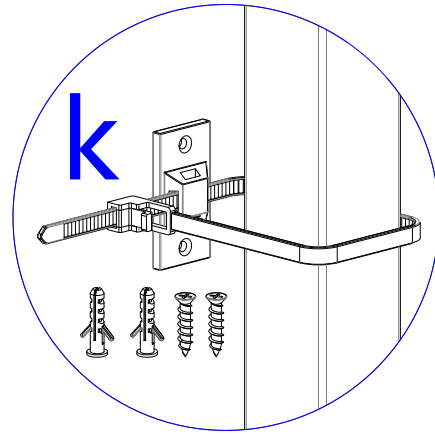
Step 23: Use hardware B,C,D,F,G,M, L to connect #23, #34, #20 and #22 together.



Note: Tighten all the steps before use, thank you.

 23-2pcs	 20-2pcs	 C M8*15-4pcs	 D ΦM8*16-4pcs	 M
 34-2pcs	 22-6pcs	 B M8*30-10 pcs	 F M6*25-6pcs	 G ΦM6*10-6pcs

Fix the wall, prevent movement,
selective installation



Recyclable garbage