

⚠ WARNINGS ⚠





- Risk of fire or electric shock.
- If you are unfamiliar with electrical installations, consult a qualified electrician before proceeding.
- Do not make or alter any holes in the wiring enclosure or modify any electrical componentry.
- Supply conductors must be rated for at least 90°C/194°F.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

CAUTIONS

- To ensure personal safety, proper grounding of the electrical fixture is required.
- The fixture must be wired in accordance with the National Electric Code (N.E.C.) and applicable local codes or ordinances.
- Suitable for damp locations
- 120 VAC, 60 Hz only.

INSTALLATION INSTRUCTIONS

1. Ensure that power has been turned off by switching the circuit breaker or by removing the fuse from the fuse panel.
2. If you are replacing an existing fixture, remove and disconnect the old fixture first.
3. After marking the center point of where the fixture will be located, using the provided template cut the required hole shown in figure 1.
4. Using the CCT switch on the junction box, preview and select the desired color temperature, as shown in figure 2.
5. Install the plaster frame into the new cutout and use the provided screws to secure the plaster frame to the ceiling shown in figure 3.
6. Plaster over the plaster frame ensuring not to apply too much plaster to fill beyond the raised trim shown in figure 4.
7. Open the junction box, remove the desired knockout and install a listed cable clamp/strain relief (not provided), as required by code.
8. Insert the supply wire through the cable clamp/strain relief.
9. Connect the hot (black) wire to the black supply wire, the neutral (white) wire to the white supply wire, and the ground (green/bare copper) wire to the green using the supplied wire connectors shown in figure 5.
10. Put all wires into the metal junction box, ensuring no wires are pinched, and close the box.
11. Connect the male output connector from the junction box with the female connector from the fixture and tighten the locking nut.
12. Insert the junction box into the plaster frame, ensuring the junction box is laying on the ceiling material. Then align the locking tabs on the side of the fixture such that the fixture can be inserted then turn the fixture clockwise until it's locked into the plaster frame, see figure 6.
13. Installation is now complete. Restore power and check operation of the light fixture.

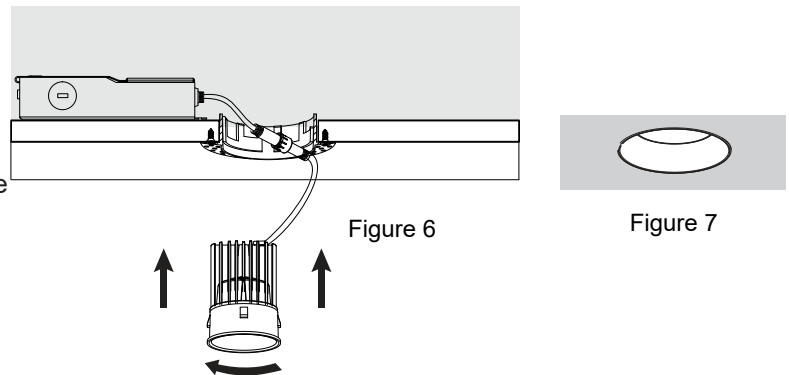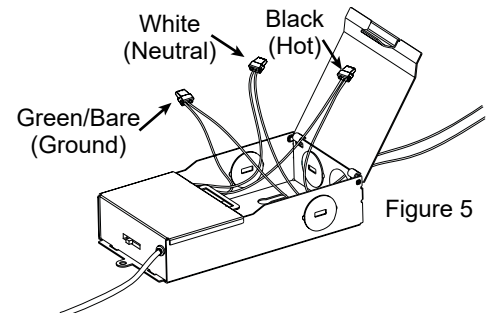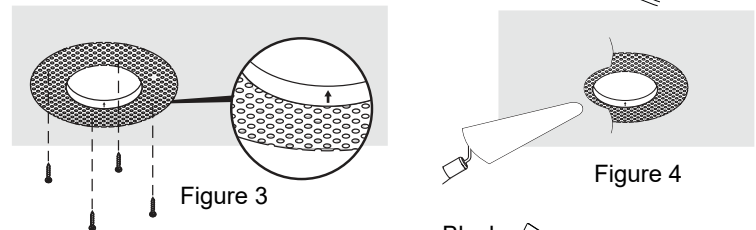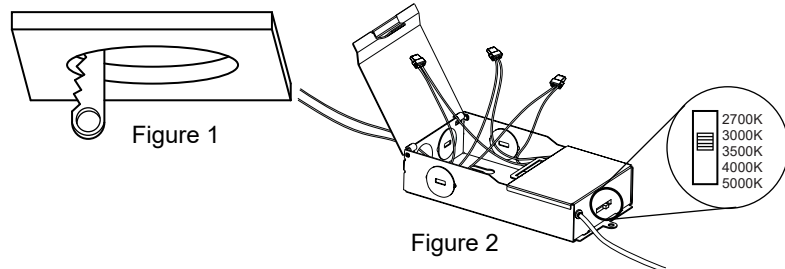

3-YEAR WARRANTY

Maxxima extends a 3-year limited warranty to the original purchase that the products listed are free from defects in material and/or workmanship only. Maxxima will replace any warranted product to the original consumer/purchaser if the product fails because of defects due to workmanship and/or materials within the limited warranty period. Limited warranty is not transferable and applies to the original installation of the Maxxima product. This offer does not constitute in any way a product guarantee and Maxxima does not hereby assume any obligation whatsoever beyond sending a free replacement product.