

# ASSEMBLY INSTRUCTIONS



## CAUTION

◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

## TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver



Flat blade screwdriver




Pliers




Wire strippers


## HARDWARE INCLUDED




Fixture




Iron Rack A




Iron Rack B




Screws A




Screws B



Stems




Swivels



Ceiling Plate




Ball Nuts



Baseplate



Lanyards




Washers




Decorative Nuts




Ground Wire



Mounting Unit



Wood Screws



Wall Anchors




Mounting Screws



Wire Nuts

\*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE




## EXPLODED PARTS

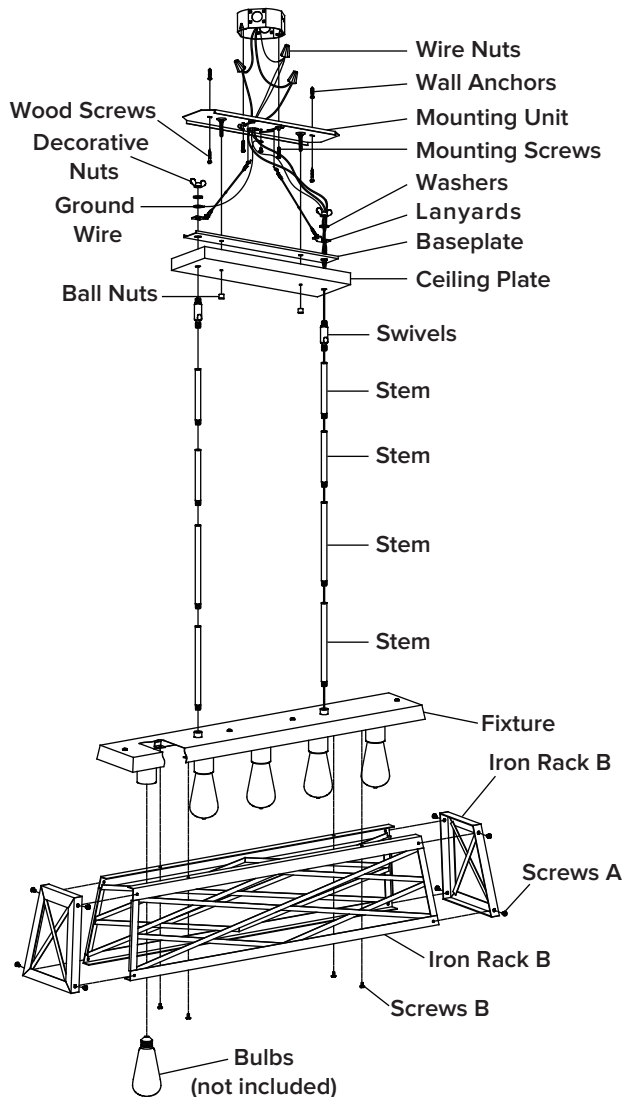

## INSTALLATION




### STEP 1

Attach the **iron rack B** into **iron rack A** using **screws A** as shown.

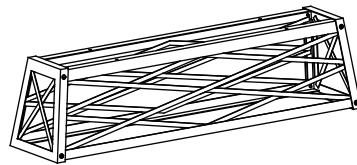


### STEP 2

Attach the **iron rack** into **fixture** using **screws B** as shown.

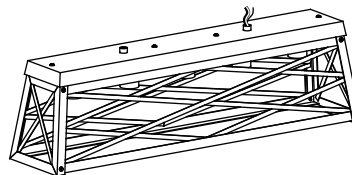

### STEP 3


1. Unscrew the **ball nuts** and **green grounding screw** from the **mounting unit**.
2. Disassemble the **swivels** under the **ceiling plate** by unscrewing **decorative nuts**. Keep the **baseplate**, **washers**, **ground wire** and **lanyards** for later use.

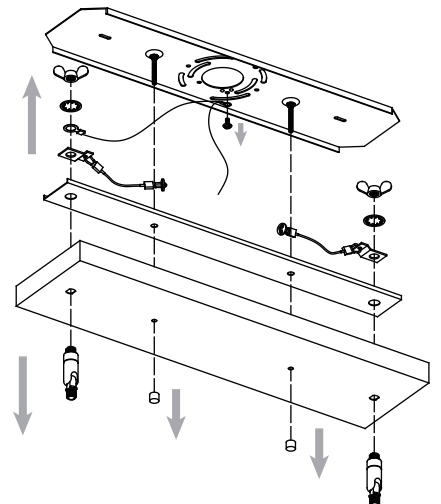

# ASSEMBLY INSTRUCTIONS (INSTALLATION)


## STEP 4

1. Weave the fixture wire and fixture ground wire through the **stems** and **swivel**.
2. Install **swivels** and **stems** into the **fixture**. Install **stems** based on the desired length of the item on the **fixture**.

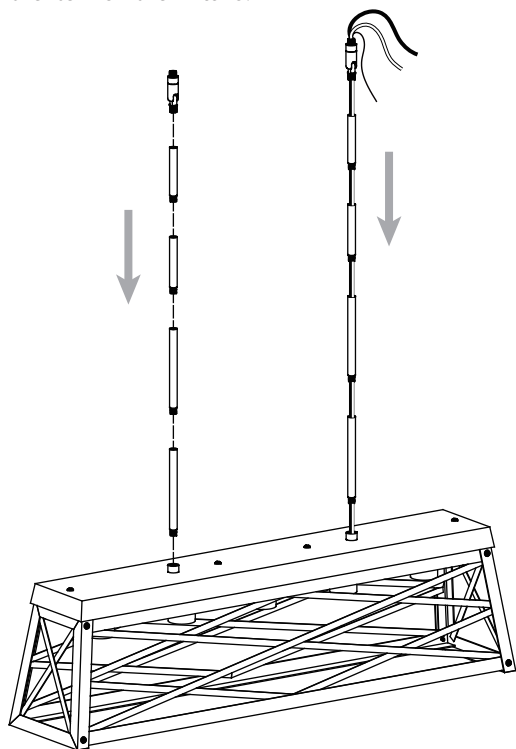


## STEP 5

1. Weave the fixture wire and fixture ground wire through the **ceiling plate**, **baseplate**, **ground wire**, **lanyards**, **washer** and **decorative nut**.
2. Install **baseplate**, **lanyards**, **ground wire** and **swivels** into the **ceiling plate**, and secure with **washers** and **decorative nuts**.

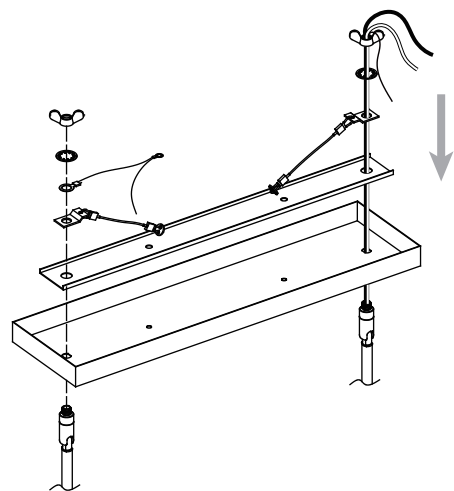



## STEP 6

- Attach the **mounting unit** to the junction box using the **mounting screws**. Secure **mounting unit** to ceiling with **wood screws** and **wall anchors**.

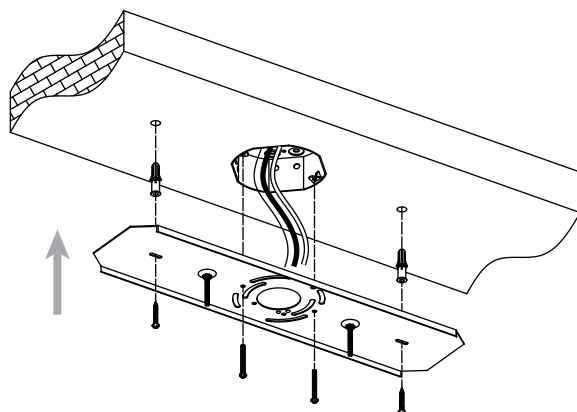


## STEP 7

1. Attach the lanyards on to the mounting unit.
2. Make the electrical connection from the junction box to the **fixture**. Connect the **ground wire** to the **mounting unit** using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape.

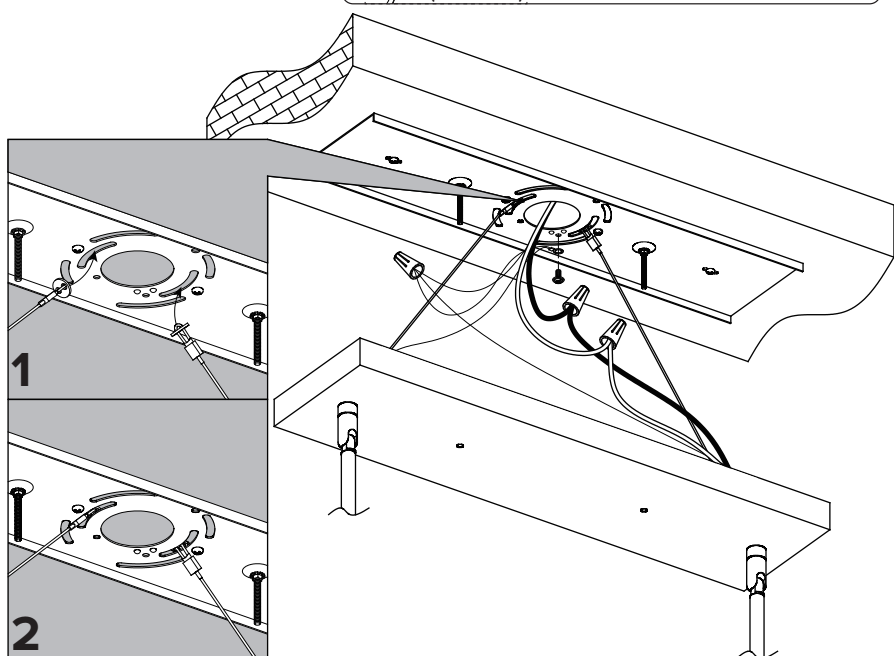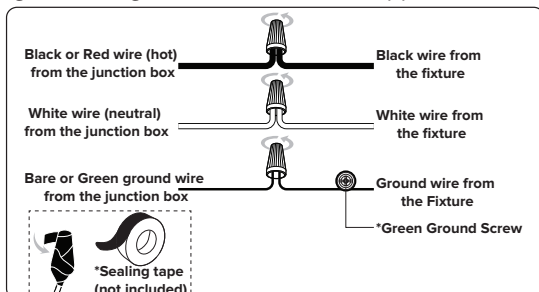

## STEP 8

- Attach the **ceiling plate** to the **mounting unit** through screw holes as shown, and secure it with **ball nuts**.

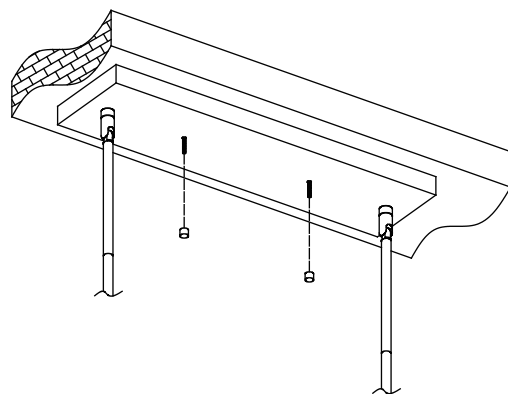

## STEP 9

- Install bulbs (not included)

