

# Heavy Duty Safety Switch

## Type VBII, 60 Amp and Oversized 30A, Type 3R (Outdoor)

### Standards and Ratings

- UL Listed under file #E4776
- Meets UL98 for switches and UL 50 for enclosures
- Meets NEMA Standard KS-1 for enclosed switches
- Meets NEC wire bending space requirements
- Rated 10,000 AIC with Class H fuses or 200,000 AIC with Class R and J fuses
- 60A switches rated 10,000 AIC at 600Vdc with Class R or J fuses
- I<sup>2</sup>t rated (Amps<sup>2</sup> x Seconds = 200,000)
- 12X overload current rating exceeds 10X industry standard

- Suitable for use as service entrance equipment

### Features

- Quick-make and break switching action
- Double break visible blade design
- Highly visible ON/OFF indication
- Rugged installer friendly enclosure design
- Modular design allows quick and easy replacement of parts
- Front removable lugs which can easily be converted to copper body or compression type lugs
- Defeatable dual cover interlock

### General Information

Catalog Number	Volts	Description	Shipping Weight (lbs.)
HF361RL	30	600 3 Pole, 3 Wire, Fusible	20
HNF361RL	30	600 3 Pole, 3 Wire, Non-Fusible	19
HF222NR 1	60	240 2 Pole, 3 Wire, Fusible	19
HF322NR	60	240 3 Pole, 4 Wire, Fusible	20
HF262R	60	600 2 Pole, 2 Wire, Fusible	20
HF362R	60	600 3 Pole, 3 Wire, Fusible	20
HF362NR	60	600 3 Pole, 4 Wire, Fusible	20
HNF262R	60	600 2 Pole, 2 Wire, Non-Fusible	20
HNF362R	60	600 3 Pole, 3 Wire, Non-Fusible	19

### Horsepower Ratings <sup>2 3</sup> - 240 Volts

Catalog Number	1 Phase, 240V AC		3 Phase, 240V AC		250V DC
	Std	Max	Std	Max	
HF222NR	3	10	7 ½	15	10
HF322NR	3	10	7 ½	15	10

### Horsepower Ratings <sup>2 3 4</sup> - 600 Volts

Catalog Number	3 Phase, 480V AC		3 Phase, 600V AC		600V DC
	Std	Max	Std	Max	
HF361RL	5	15	7 ½	20	—
HNF361RL	—	20	—	30	—
HF262R	—	— <sup>5</sup>	—	— <sup>5</sup>	30
HF362R	15	30	15	50	25
HF362NR	15	30	15	50	25
HNF262R	—	— <sup>5</sup>	—	— <sup>5</sup>	30
HNF362R <sup>6</sup>	—	50	—	60	25

<sup>1</sup> These switches are UL Listed for application on grounded B phase systems.

<sup>2</sup> Dual horsepower ratings: Std - applies when non-time delay fuses are installed.

Max - applies when time-delay fuses are installed.

<sup>3</sup> Horsepower ratings listed also apply to Design E motors with no derating.

<sup>4</sup> 60A switches also rated 10HP at 250V DC.

<sup>5</sup> 60A switches also rated 20HP at 480V and 25HP at 600V, 1 phase.

<sup>6</sup> 60A switches also rated 20HP on 3Ø, 240V AC systems.

## Product Specification Sheet HD60.3

Answers for industry.

**SIEMENS**

# Product Specification Sheet #HD60.3 (page 2 of 3)

## Accessories

Catalog Number	Description
HA161234	One Normally Open and Closed Auxiliary Switches
HA261234	Two Normally Open and Closed Auxiliary Switches
HA361234	Low Voltage Auxiliary Switch
HG61234	Equipment Ground Lug Kit
HG261234	Isolated Equipment Ground Lug Kit
HP62	Fuse Puller (3 per kit) (HF222NR, HF322NR, HF262R, HF362R, HF362NR)
HN623	Neutral Kit
HR612 1	240 Volt Class R Fuse Clip Kit (3 fuse clips per kit) (HF222NR, HF322NR)
HR62	60A 600 Volt Class R Fuse Clip Kit (3 fuse clips per kit) (HF262R, HF362R, HF362NR)
HLC612	Copper Lug Kit (9 lugs per kit)
HCL623	Compression Lug Neutral Barrier Kit
HS075	0.75" Type "HS" Outdoor Hub
HS100	1.00" Type "HS" Outdoor Hub
HS125	1.25" Type "HS" Outdoor Hub

## Mechanical Lug Wire Ranges (60/75°C, Cu/Al)

Description	Wire Range
Line, Load	#12-2 AWG (Al) or
Neutral	#14-2 AWG (Cu)
Ground	#14-4 AWG

## Compression Lugs <sup>4</sup>

Wire Size	Burdny		Thomas-Betts		Ilsco	
	CU Only	CU/AL	CU Only	CU/AL	CU Only	CU/AL
#14-10			256-30695-1352	60097		
#8	YA8C-L1 BOX YA8C-TC14	YA8CA3	54130 54930BE	60102 61102		ACL-8
#6	YA6C-L BOX YA6C	YA6CA1	54105 54905BE	60107 61107	CRB-6 CRB-6L	ACL-6
#4			54106	61112	CRB-4	

<sup>1</sup> Also 30, 600V for HF361RL.

<sup>2</sup> Also for HNF361RL.

<sup>3</sup> Place "DOOR" at the end of the switch catalog number.


<sup>4</sup> If compression lugs are used for the neutral, order compression lug neutral barrier kit HCL623.

## Replacement Parts

Catalog Number	Description
HFB22 <sup>1</sup>	Fusible 240 Volt Line Side Replacement Base (HF222NR, HF322NR)
HBB22 <sup>1</sup>	Fusible 240 Volt Load Side Replacement Base (HF222NR, HF322NR)
HFB62	Fusible 600 Volt Line Side Replacement Base (HF262R, HF362R, HF362NR)
HBB62	Fusible 600 Volt Load Side Replacement Base (HF262R, HF362R, HF362NR)
HNB623 <sup>2</sup>	Non-Fusible Replacement Base (HNF262R, HNF362R)
HH6123	Replacement Handle/Handle Guard
HL612	Replacement Lugs (3 lugs per kit)
HM6123	Replacement Mechanism
<sup>3</sup>	Replacement Door

# Product Specification Sheet #HD60.3 (page 3 of 3)

## Dimension Drawing

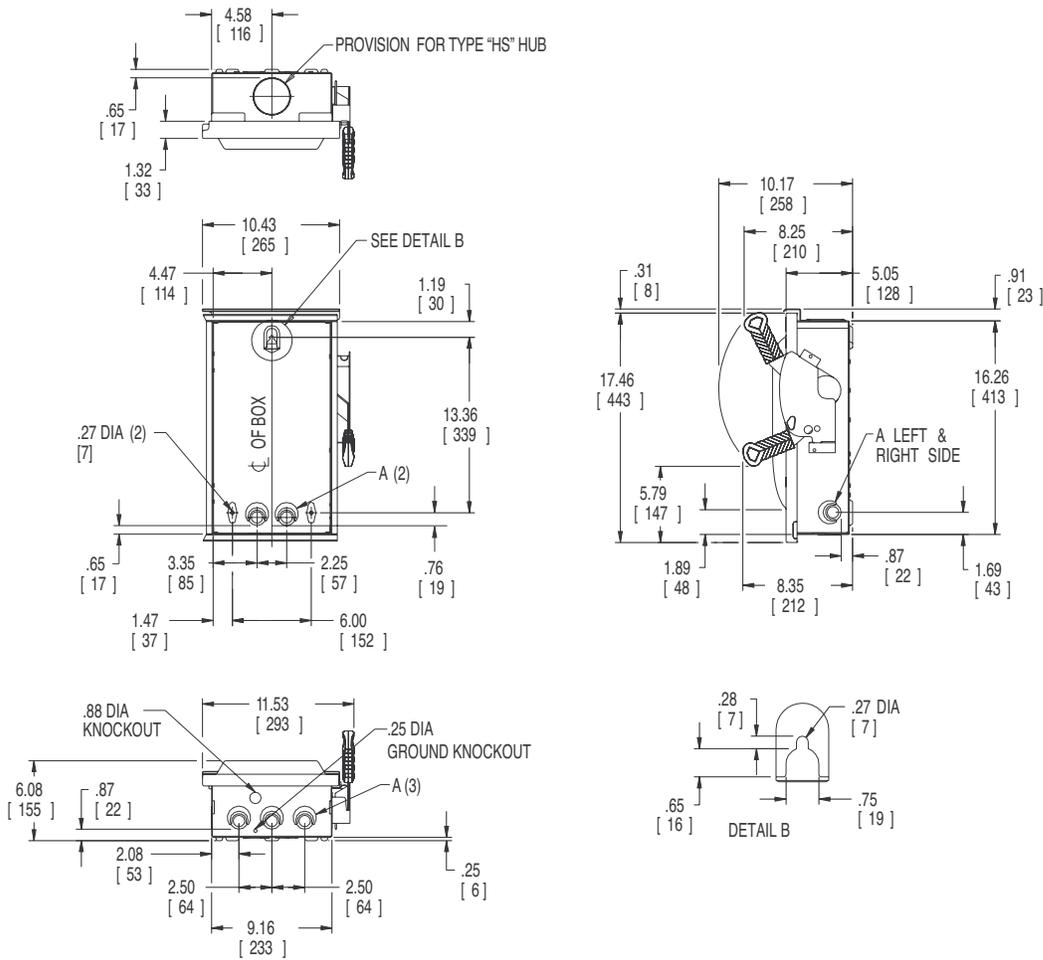

Dimensions shown in inches and millimeters ( ).  
Dimension shown accurate to  $\pm \frac{1}{16}$  inch.

KNOCKOUT CODE	CONDUIT SIZE			
	.50	.75	1.00	1.25
A (Tangential)				

	LINE SIDE WIRE BEND	LOAD SIDE WIRE BEND
240V Fused	3.54 (90)	6.07 (154)
600V Fused	3.54 (90)	3.57 (91)
Non-Fused	3.54 (90)	8.68 (220)

Enclosure: Galvanized Steel  
.054 Thick (17 Gauge)  
Finish: ANSI Grey #61 Paint