

Features

- Metal construction.
- ADA Compliant Lever handle .
- Leak free ceramic disc valve allows both volume and temperature control.
- Temperature memory allows faucet to be turned on and off at any temperature setting.
- High-temperature limit setting for added safety.
- Single-hole mounting.
- Durable KOHLER finishes resist corrosion and tarnishing.
- Complete range of faucets, accessories and showering components to coordinate a full bathroom.
- 1.2 gal/min (4.5 l/min) maximum flow rate [max at 60 psi (4.1 bar)]
- Not compatible with lavatories with centerset drillings.





Codes/Standards

ASME A112.18.1/CSA B125.1 **NSF 61 NSF 372** All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1

### KOHLER<sup>®</sup> Faucet Lifetime Limited Warrantv

See website for detailed warranty information.

### Available Color/Finishes

Color tiles intended for reference only.

**Color Code Description** 

CP **Polished Chrome** 

TT Vibrant Titanium



### **Composed**®


K-73167-4

# Single-handle Sink Faucet

## Composed®

Single-handle Sink Faucet K-73167-4

# KOHLER, Faucets

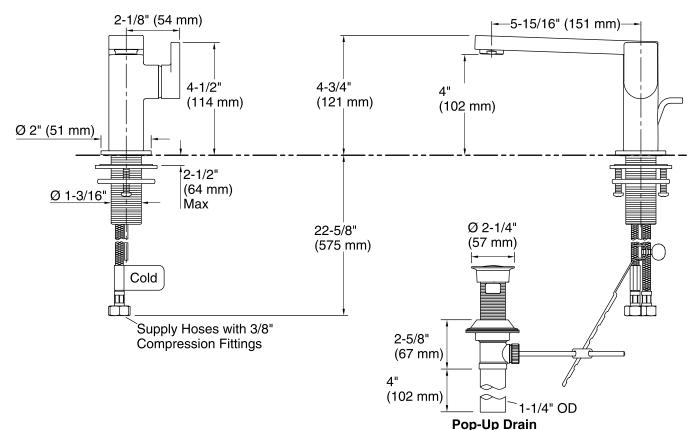

**Technical Information** 

All product dimension	s are nominal
Valve body:	Cast Brass
Drain with overflow:	YES
Drain tailpiece	YES
included:	

### Spout:

Spout reach:	5-15/16" (151 mm)
Handle clearance:	1-9/16" (40 mm)

### Faucet:

Flow rate:	1.2 gal/min (4.5 l/min)
Pressure:	60 psi (4.1 bar)

#### Notes

Install this product according to the installation guide.

ADA compliant when installed to the specific requirements of these regulations.

