

### Features

- Showerhead features an advanced spray engine provides three spray options: powerful massage, intense drenching, or wide coverage.
- Wide coverage spray produces an encompassing spray for everyday use.
- Intense drenching spray delivers a forceful spray ideal for rinsing soap from hair.
- Powerful massage is a focused stream for massaging sore muscles or for use as a utility spray.
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup.
- Single lever handle allows for simultaneous on/off activation and temperature control.
- Premium KOHLER finishes with ScratchShield® technology withstands even the toughest daily use.
- Showerhead has a maximum flow rate of 1.8 gpm (gallons per minute).

### Material

- Constructed with premium materials for durability and reliability.
- Package includes: showerhead, showerarm and flange, valve trim plate, diverter spout with 1/2" NPT for slip-fit connection and Rite-Temp® valve with 1/2" connections.

### Technology

- Rite-Temp® pressure-balancing technology maintains water temperature within +/- 3 degrees Fahrenheit for anti-scalding protection and precise temperature control.

### Water Conservation & Rebates

- WaterSense-labeled 1.8gpm showerheads use at least 25 percent less water than standard 2.5-gpm showerheads while still meeting strict performance guidelines.



### Codes/Standards



ASME A112.18.1/CSA B125.1  
ASSE 1016/ASME A112.1016/CSA B125.16  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)


See website for detailed warranty information.

### Available Color/Finishes

*Color tiles intended for reference only.*

#### Color Code Description

	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel

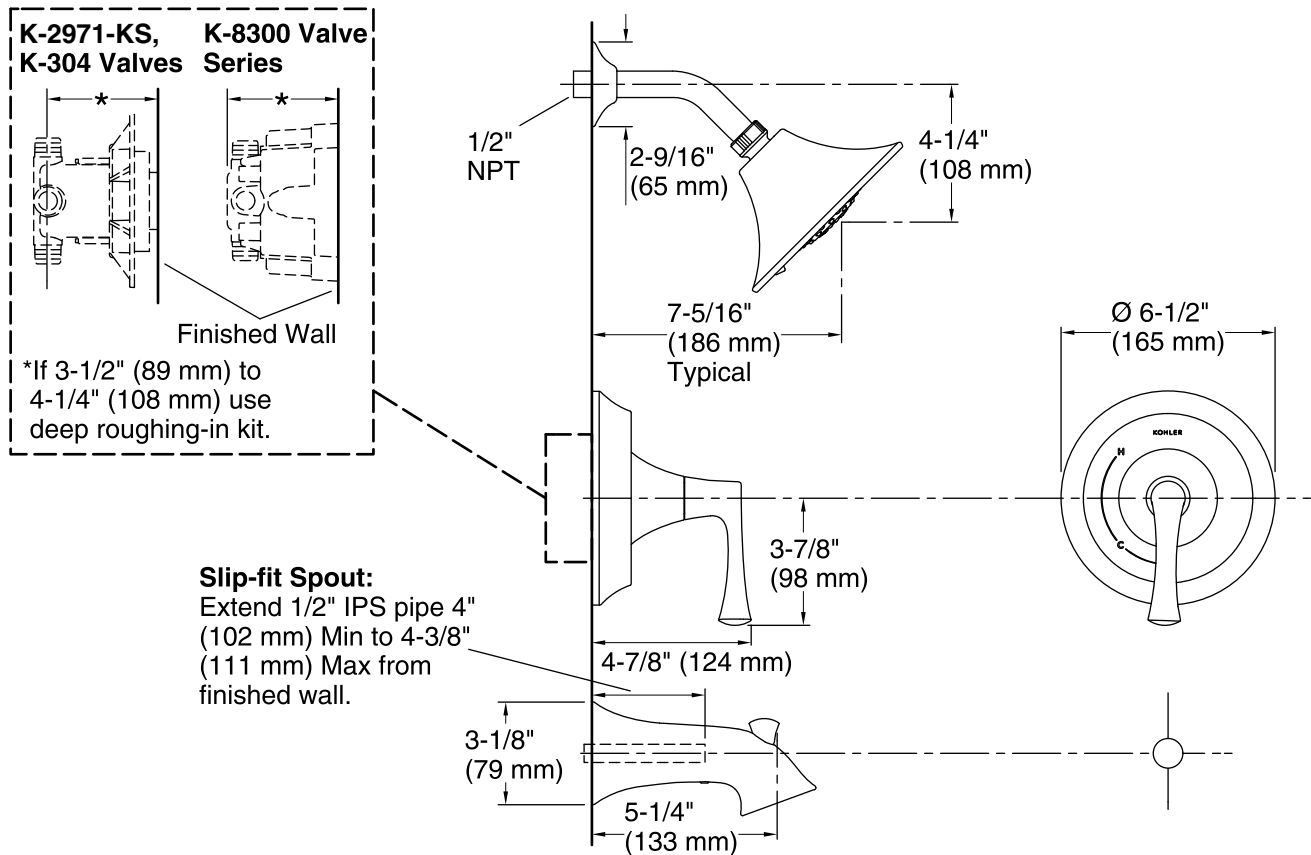

### Technical Information

All product dimensions are nominal.

#### Shower Valve:

Flow rate - Max: 5 gal/min (18.9 l/min)  
Pressure - Max: 45 psi (3.1 bar)  
Min. pressure IN: 20 psi (1.4 bar)

#### Showerhead:

Rated maximum flow: 1.8 gal/min (6.8 l/min)  
Pressure: 80 psi (5.5 bar)

### Notes

For use with automatic compensating valves rated at 1.08 gal/min (4.1 l/min) or less.

Install this product according to the installation instructions.