


Installation Guide

LED Panel light wiring installation



1. Open the junction box as follows.


Step 1. Lift the cover from the side as shown.



Step 2. Multipat knock out, Please punch out the one you intend to wire through.


2. Turn off electricity power, and connect electrical wires as directed .

Step 1, Lead electrical wires into the junction box.
Step 2, Connect LIVE wires (BLACK), Neutral wires (WHITE) and Earth wires accordingly by using caps.

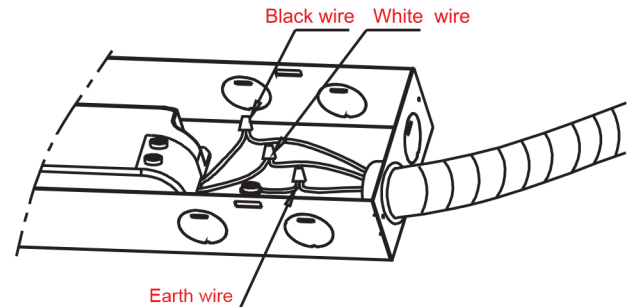


3. Dimmable wire connection(for 1-10V dimmable panels only). Connect the dimmable wires with 1-10V dimmers accordingly by using the caps.

Purple wire(DIM+) Gray wire(DIM-)

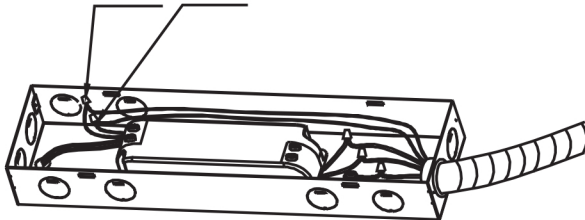


4. Put the cover back onto the junction box.

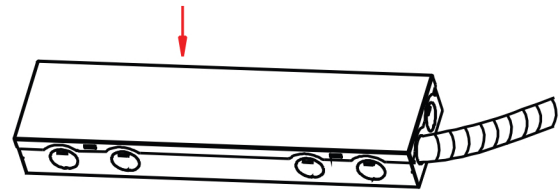


Recessed Installation



1. Remove 2'x2' or 1'x4' or 2'x4' ceiling tile.

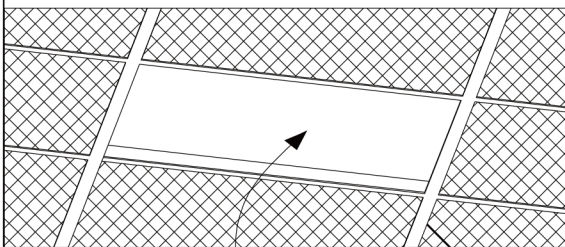

Borton view

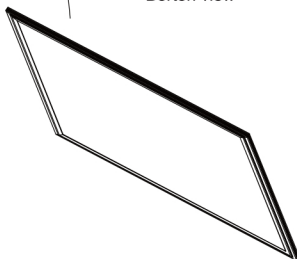

2. Attach safety brackets.

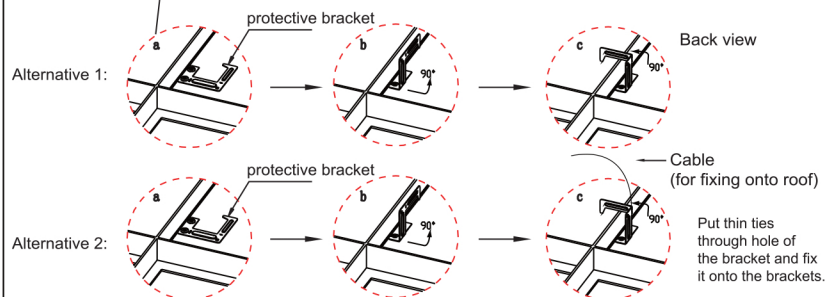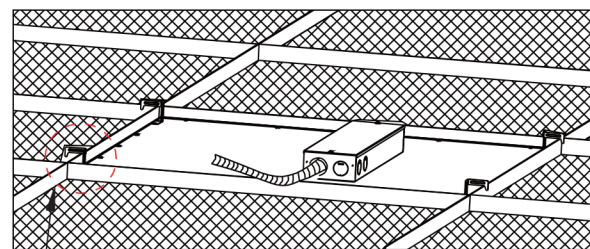

The Installation must be carried out by an electrician.