


The patio door installation features multiple mounting options. The tubular side rails have pre-drilled holes which enable mounting directly through these mounts. The second option uses projection brackets to extend the mounting width. These brackets offer flexibility to attach for an orientation that suits the application. The tabs can extend up to 2-in if needed.

WIDTH			HEIGHT	
OPENING SIZE	OPENING WIDTH RANGE	MOUNT SIZE	OPENING SIZE	OPENING HEIGHT RANGE
64-in	60-in to 70-in	66-1/8-in	81-in	78-in to 83-1/2-in
72-in	68-in to 78-in	74-1/8-in	81-in	78-in to 83-1/2-in

RECORD
YOUR
MEASUREMENTS

A	WIDTH
B	WIDTH
C	WIDTH
D	HEIGHT

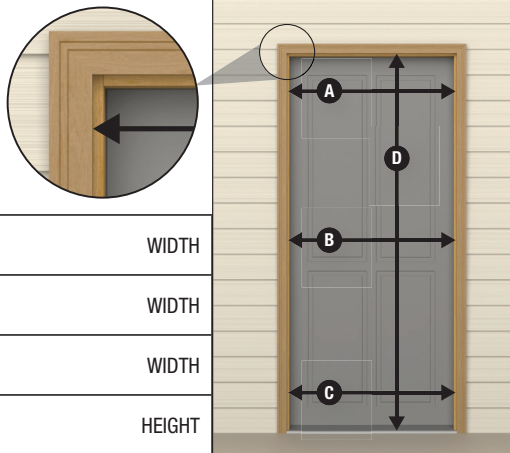


Determine operating side as viewed from outside.


SURFACE MOUNT

The mounting rails will sit on the outside of the home and mount directly into the face of the exterior surface.


Required: Mounting Bracket on top and bottom of stationary door

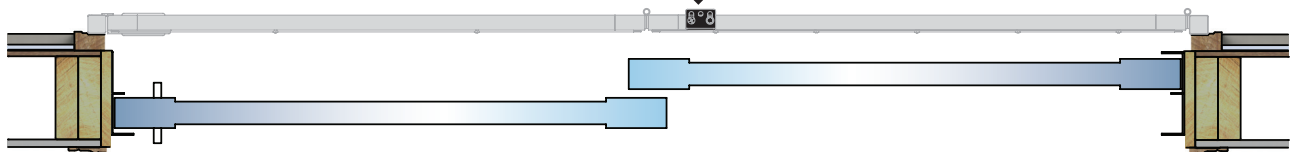


NOTE: construction styles may vary.

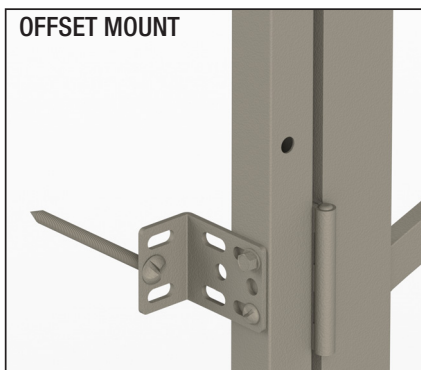

Offset Mount with bracket projecting 2-in off opening. Also extends mounting width 1-in on each side and 2-in overall.

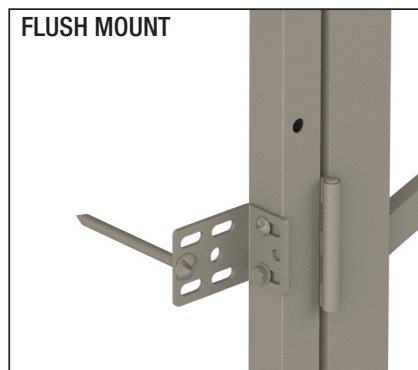

Flush Mount with bracket extending mounting width 2-in or 4-in total.

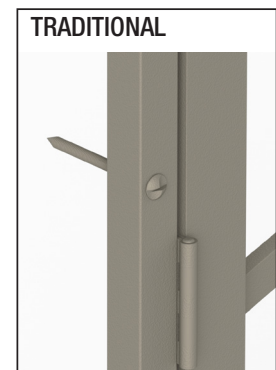

Traditional style mount with no brackets.