

# RAPIDFIT® Check List


## Block Installation

### Casing

1. Measure the total distance around all windows and doors. Compute how many feet of casing are needed to complete your project. Remember to add sufficient material to cover trim and waste (10% over is typically sufficient).

Windows and Doors: Total Inches \_\_\_\_\_ " / 12" = Total Feet \_\_\_\_\_ '

8' Casing Qty. \_\_\_\_\_ 12' Casing Qty. \_\_\_\_\_

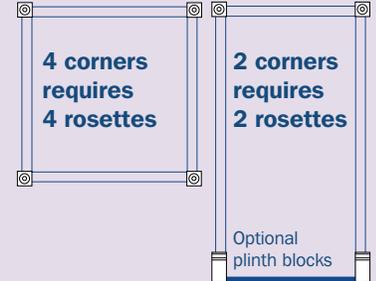

2. Rosettes: Used at door and window corners. The number of Rosettes needed to complete your job will depend on the number of doorways and windows you are updating. Consider the illustration to the right when determining how many Rosettes you will need.

Total Rosette Qty. for Windows and Doors \_\_\_\_\_

3. Plinth Blocks: Plinth Blocks are used at the bottom of door casing, where base moulding meets door casing. Single Carved Plinth Blocks are to be used when upgrading your casing ONLY. Dual Carved Plinth Blocks are used when upgrading BOTH casing and base.



Number of Doors \_\_\_\_\_ x 1 set  
Single Carved Plinth Block



Number of Doors \_\_\_\_\_ x 1 set  
Dual Carved Plinth Block

4. Spacers: Spacers act as a buffer between the heel of your old casing and RapidFit casing. Place Spacers every 6 inches. Each spacer is 1/8" thick and can be stacked on top of each other to fill in any gap.

Total Project Inches \_\_\_\_\_ / 6 in. = \_\_\_\_\_ of spacers needed / 50 per pack = \_\_\_\_\_ packages


### Base

1. Measure the total distance around your room, excluding openings for doors. Remember to add sufficient material to cover trim and waste (10% over is typically sufficient).

Room Measurements: Total Inches \_\_\_\_\_ " / 12" = Total Feet \_\_\_\_\_ '

8' Base Qty. \_\_\_\_\_ 12' Base Qty. \_\_\_\_\_

#### Floor Plan

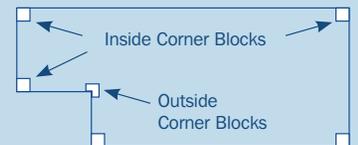

2. Transition Blocks: Transition Blocks are used to create a smooth transition between existing door casing applications and your newly upgraded base. Transition Blocks are packaged in pairs, one for each side of the door opening. They are not necessary if you are upgrading both casing and base.



\_\_\_\_\_ x 1 set Transition Blocks

3.
 

 Qty. Inside Corners _____ (determine number of inside corners)	 Qty. Outside Corners _____ (determine number of outside corners)	 Qty. Middle Blocks _____ (used between two pieces of RapidFit® base moulding)
---	---	--

4. Spacers: Spacers act as a buffer between the face of your old base and RapidFit base. Place Spacers every 6 inches. Each spacer is 1/8" thick and can be stacked on top of each other to fill in any gap.

Total Project Inches \_\_\_\_\_ / 6 in. = \_\_\_\_\_ of spacers needed / 50 per pack = \_\_\_\_\_ packages

### Crown

1. Measure the total distance around your room. Remember to add sufficient material to cover trim and waste (10% over is typically sufficient).

Room Measurements: Total Inches \_\_\_\_\_ " / 12" = Total Feet \_\_\_\_\_ '

8' Crown Qty. \_\_\_\_\_ 12' Crown Qty. \_\_\_\_\_

2.
 

 Qty. Inside Corners _____ (determine number of inside corners)	 Qty. Outside Corners _____ (determine number of outside corners)	 Qty. Middle Blocks _____ (used between two pieces of RapidFit® crown moulding)
---	---	---