

KOHLER® Roughing-In

K-1224-LA, K-1224-RA
MARIPOSA®

BATH WHIRLPOOL WITH INTEGRAL APRON

Product Information

Applicable products:	
Bath whirlpool with integral apron – left drain	K-1224-LA
Bath whirlpool with integral apron – right drain	K-1224-RA

Fixture*:	
Basin area:	
Bathing well, bottom	48" (1219 mm) x 24" (610 mm)
Bathing well, top	59" (1499 mm) x 30" (762 mm)
Weight	110 lbs (49.9 kg)
To overflow:	
Water depth	14" (356 mm)
Capacity	67 gal (254 L)
* Approximate measurements for comparison only.	

Pump	V	Hz	A
1-speed	120	60	7.5

Required Electrical Service

Dedicated circuit required, protected with a Class A Ground-Fault Circuit-Interrupter (GFCI).	
Pump/control	120 V, 15A, 60 Hz
Locate the outlet behind the whirlpool and within 24" (610 mm) of the pump.	


Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 42 lbs/square foot (205 kg/square meter).

If installing a rim-mount faucet, make sure there is no interference with the drain overflow before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

Fixture conforms to ANSI Standard Z124.1.2. All dimensions are nominal.

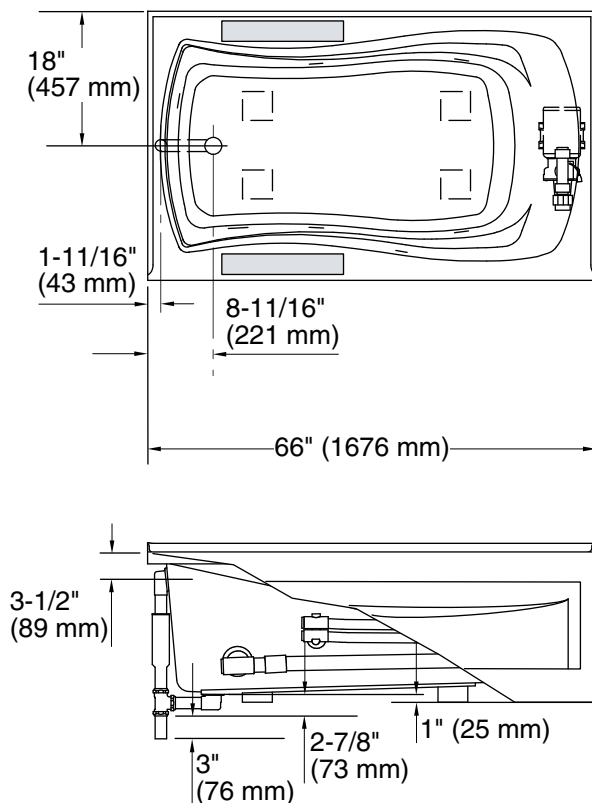

No change in measurements with drain shown. (K-7161-AF or K-7161M-AF)

█ Recommended faucet area.

