## KOHLER Roughing-In


## K-T10940, , K-T10941, K-T10943, K-T10944 $$\rm STILLNESS_{\textcircled{m}}$$ THERMOSTATIC FAUCET TRIM

## **Installation Notes**

Install this product according to the installation guide. **Product Information** 

Applicable faucet trim only*:	
Thermostatic valve trim	K-T10940-4
Stacked thermostatic valve trim	K-T10941-4
Volume control trim	K-T10943-4
Transfer valve trim	K-T10944-4
*Applicable valve must be ordered to complete the faucet.	
Lever handle is ADA compliant	ADA

## Applicable thermostatic valve only (not shown)\*\*: 3/4" Thermostatic valve K-669-KS 3/4" Stacked thermostatic valve K-670-KS 3/4" Volume control K-671-K 1/2" Thermostatic valve K-679-KS 1/2" Stacked thermostatic valve K-680-KS 1/2" Volume control K-681-K 3/4" Transfer valve K-728-K \*\*Required for the illustration configured below

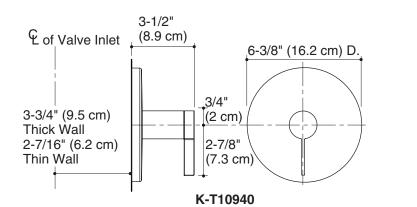

♀ of Valve Inlet
3-3/4" (9.5 cm)
Thick Wall
2-7/16" (6.2 cm)
Thin Wall
2-7/16" (6.2 cm)
K-T10941

