

KOHLER® Roughing-In

K-1160, K-1160-F
TERCET®
BATH WHIRLPOOL

Product Information

| | |
|---|-----------------------------------|
| Applicable products: | |
| Bath whirlpool – drop-in | K-1160 |
| Bath whirlpool – integral tile flange | K-1160-F |
| Fixture*: | |
| Basin area: | |
| Bathing well | 52" (1321 mm) x 38-3/4" (984 mm) |
| Top area | 61" (1549 mm) x 46-1/4" (1175 mm) |
| Weight | 127 lbs (57.6 kg) |
| To overflow: | |
| Water depth | 15" (381 mm) |
| Capacity | 96 gal (363.6 L) |
| * Approximate measurements for comparison only. | |
| Pump: | V Hz A |
| 1-speed | 120 60 7.5 |
| Minimum access panel (required): | 20" (508 mm) W x 15" (381 mm) H |

Required Electrical Service


| | |
|---|--------------------|
| Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI): | |
| Pump/control | 120 V, 15 A, 60 Hz |
| Locate the outlet behind the whirlpool and within 24" (610 mm) of the pump. | |

Installation Notes

Install this product according to the installation guide.


Floor support under whirlpool must provide for a minimum of 39 lbs/square foot (189 kg/square meter) loading.

Fixtures conforms to ANSI Standard Z124.1.2. All dimensions are nominal.

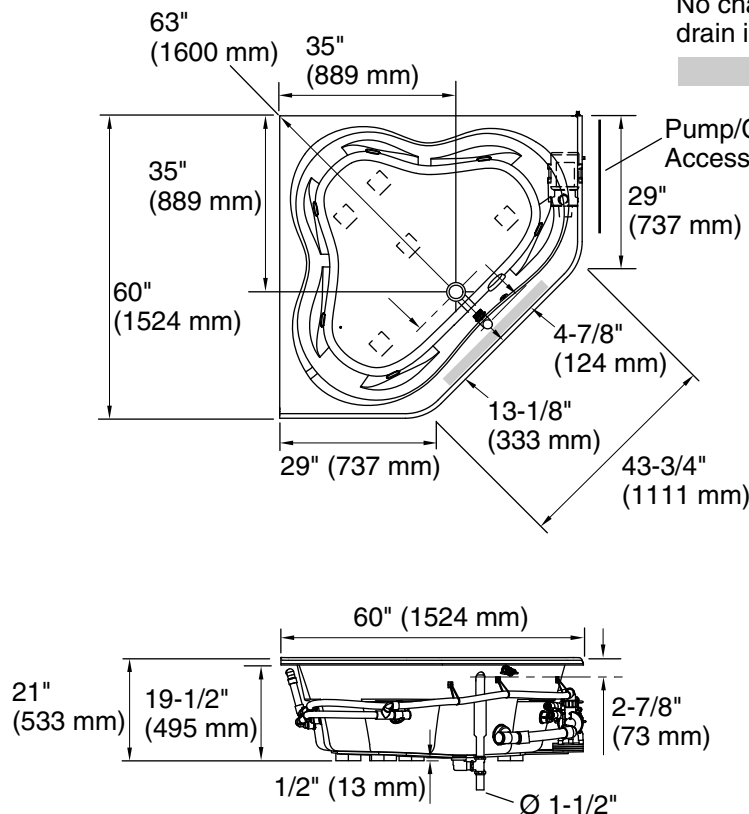


No change in measurements if connected with drain illustrated. (K-11677 or K-11677M)


Recommended faucet area



Tile Flange Detail



Drop-In Rim Detail

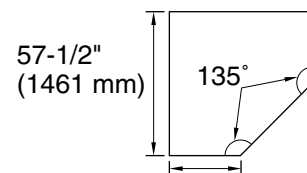

27-1/2" (699 mm)
Drop-In Rim Style
Cut-Out Detail

