


Over the Range Convection Microwave Oven

1/1

PLANNING GUIDE

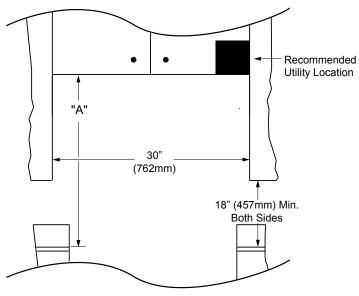

092105


UPPER CABINET DIMENSIONS


(Upper Cabinets 13" (330mm) Maximum Depth)

| ", | A" - From Top of PCOR30 to Finished Countertop |
|----|--|
| 3 | 34" (864mm) Minimum with deflector for a maximum cooktop surface BTU rating of 44,000 BTU's. |
| 36 | " (914mm) Minimum without deflector for a maximum cooktop surface BTU rating of 44,000 BTU's. |
| 3 | 36" (914mm) Minimum with deflector for a maximum cooktop surface BTU rating of 60,000 BTU's. |

NOTES:

- 1. 30" electric cooktops or ranges can be installed at 34" (864mm) with deflector or 36" (914mm) without deflector for a maximum cooktop surface rating of 10,000 watts.
- 2. Microwave is supplied with a 48" (1219mm) power cord, with a three prong grounded plug.

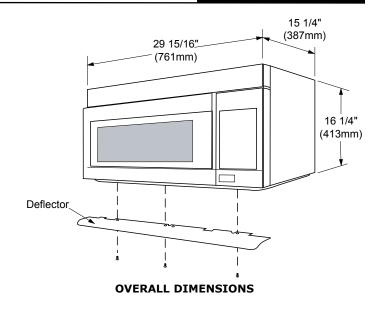



MICROWAVE TOP VIEW EXHAUST LOCATION

| Model No. | Dedicated Circuit Required | Total Connected Load | Approximate Shipping Weight |
|-----------|--------------------------------|----------------------|--------------------------------|
| PCOR30 | 120VAC, 60Hz, 15A (Breaker) | 1.56kW (13A) | 84 lbs. |

Web: http://www.Dacor.com Corporate Phone: 800-793-0093