




**IMPORTANT SAFETY INSTRUCTIONS
READ AND FOLLOW ALL INSTRUCTIONS
SAVE THESE INSTRUCTIONS**

Acrylic Sinks

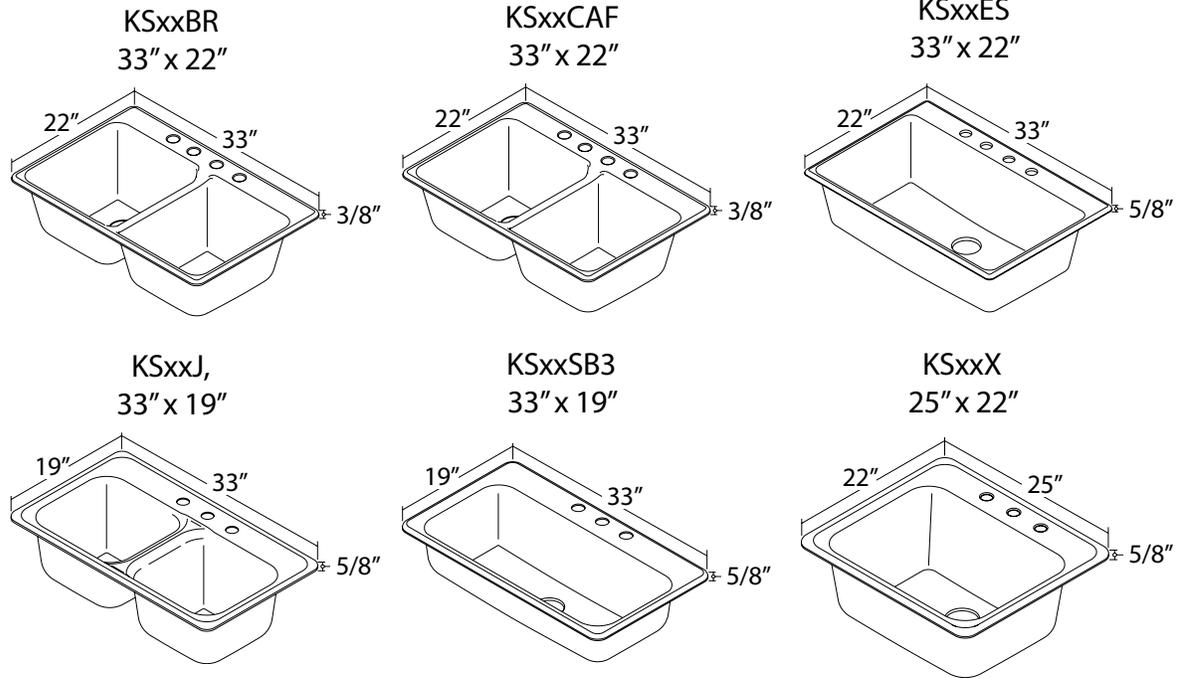

WARNING: Do not place hot pots and pans into sink. This will cause damage to sink surface and void warranty. When pouring boiling water or placing hot pots or pans into sink, run cold water simultaneously.

COMPLIANCE CERTIFICATIONS:
ANSI Z124.6 AND CAN/CSA-B45.5

DO YOU HAVE?

Tape Measure
Pencil
Safety Glasses
Caulk Gun

Caulk (color matched and high grade silicone for drains)
Saber Saw
1-3/8" Carbide Grit Hole Saw
(Optional for adding extra faucet hole(s))

IMPORTANT

- Read installation instructions carefully before starting project
- Keep instructions for warranty information
- Peel back protective film to verify color before installation
- Do not use plumber's putty It will cause product failure and void warranty Use a high grade silicone caulk for all necessary locations
- Clip location, number of faucet holes, and bowl location may vary by sink style



Scan code for installation video or visit www.lyonsindustries.com and select "How To Videos"

OPTIONAL - ADDING EXTRA FAUCET HOLE(S)

CUTTING ADDITIONAL FAUCET HOLE(S) IF NEEDED

(If additional faucet hole(s) are not needed, skip to "INSTALLATION INSTRUCTIONS")

- Leave protective film on and place masking tape over desired hole location.
- Mark center of hole on masking tape (Fig 1).
- Use 1-3/8" carbide grit hole saw to cut faucet hole(s) (Fig 2).
- Sand back of hole to smooth out rough edges.

INSTALLATION INSTRUCTIONS

IMPORTANT - Refer to the countertop manufacturer to determine the appropriate cutting method for your countertop.

IMPORTANT - The clip system is designed to hold this sink in place while the high grade silicone dries. If the opening is too large the sink can be weighed down while the silicone dries. Be careful not to damage the countertop or sink if using a weight.

IMPORTANT - Leave protective film on during installation.

EXISTING COUNTERTOP INSTALLATION

- Refer to cutout dimensions on next page. Cutting your existing countertop may not be necessary.
- If you need to adjust the hole size, use a saw recommended by countertop manufacturer.
- Peel back protective film around drains and faucet area.
- Install faucet and drains to sink per manufacturers instructions.
- Use a high grade silicone for drain installation.

Warning: Do not use plumber's putty. It will cause product failure and void warranty. Use a high grade silicone for all necessary locations.

- Place sink in hole at an angle. (Fig. 3)
- Push down to ensure sink rim fully rests on countertop. (Fig. 4)
- Shift sink side to side and front to back to make sure the clips "seat properly".
- If sink needs removed for any reason push in on clips from underneath then gently push up on sink until free.
- Connect all plumbing.
- Make sure sink is in desired location.
- Peel back protective film around edge of sink then apply a high grade silicone. (Fig. 5)

NEW COUNTERTOP INSTALLATION

- Place sink upside down on countertop in the desired location. Please allow adequate room from the back of the countertop.
- With a pencil, trace a line around the outside edge of sink onto countertop.
- Remove sink from countertop.
- Center the cutout dimension (refer to next page) within the traced outline.
- Refer to the countertop manufacturer to determine the appropriate cutting method for your countertop.** Cut countertop on cutout dimension line.
- Peel back protective film around drains and faucet area.
- Install faucet and drains to sink per manufacturers instructions.
- Use a high grade silicone for drain installation.

Warning: Do not use plumber's putty. It will cause product failure and void warranty. Use a high grade silicone for all necessary locations.

- Place sink in hole at an angle. (Fig. 3)
- Push down to ensure sink rim fully rests on countertop. (Fig. 4)
- Shift sink side to side and front to back to make sure the clips "seat properly".
- If sink needs removed for any reason push in on clips from underneath then gently push up on sink until free.
- Connect all plumbing.
- Make sure sink is in desired location.
- Peel back protective film around edge of sink then apply a high grade silicone. (Fig. 5)

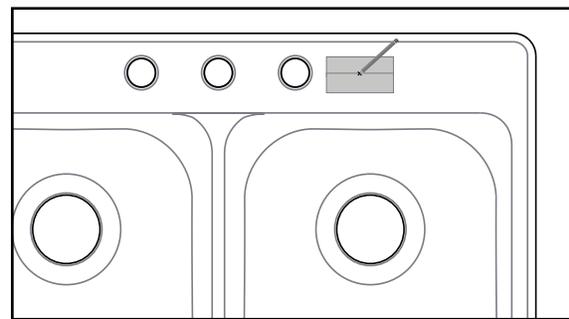


FIGURE 1. Mark extra hole location

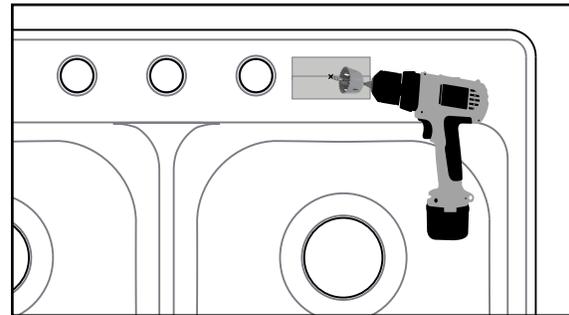


FIGURE 2. Cut hole using hole saw

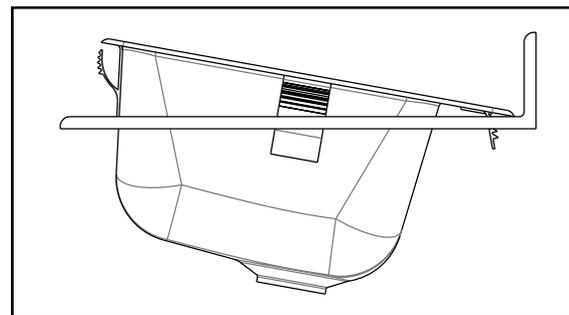


FIGURE 3. Place the sink in the hole at an angle.

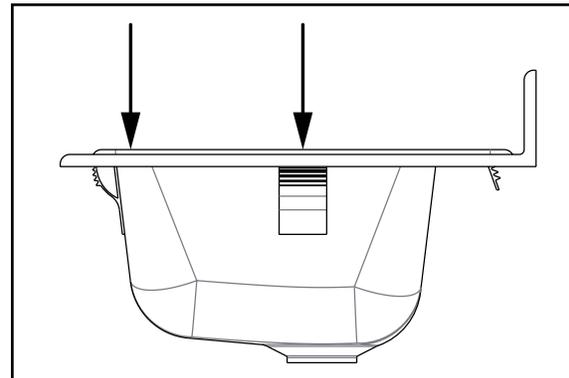


FIGURE 4. Push down on the front of the sink.



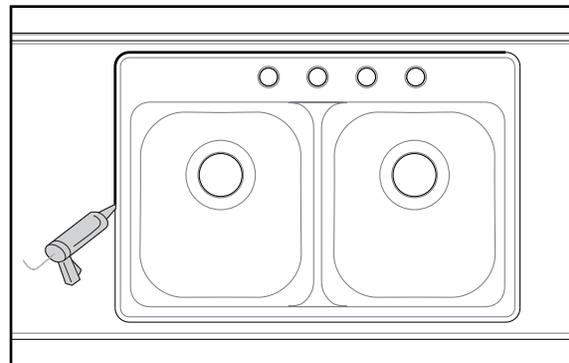


FIGURE 5. Apply Silicone.


Countertop Cutout Dimensions

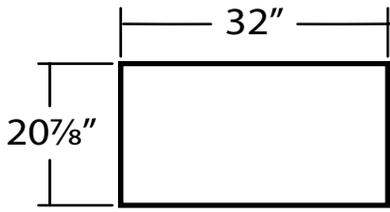


KSxxBR

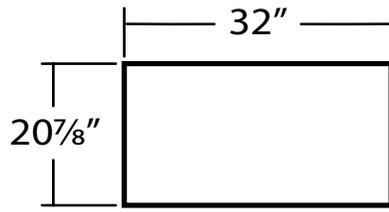


KSxxCAF

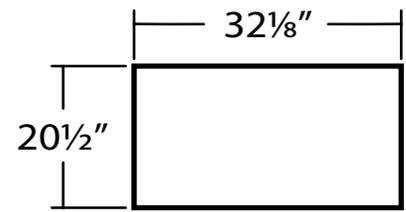


KSxxES

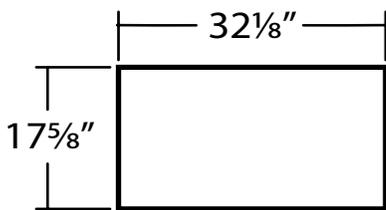

KSxxJ

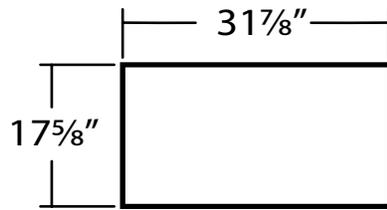

KSxxSB3

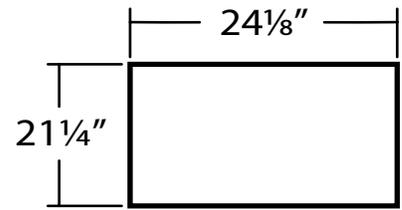

KSxxX

CARE AND CLEANING INSTRUCTIONS

- Clean surface with nonabrasive liquid detergent and warm water. Use cleaning products such as Soft Scrub Gel®, Comet Gel®, Gel Gloss® or other similar products.
- DO NOT USE ABRASIVE CLEANERS, “steel wool” or wire brushes on surface. Caustic drain cleaners may cause surface damage. Open flames (cigarettes, candles, etc.) may damage surface.
- Surface damage-light scratches, dulled areas, and small cuts and are restored by first scrubbing with automotive-type white body cleaning compound, such as 3M® Super Duty Rubbing Compound, followed by an application of Gel Gloss®. See next page for detailed Scratch Repair Instructions.
- Remember to always use a cutting board or sink protector when using knives or sharp objects in your sink.
- When pouring boiling water or placing hot pots or pans into the sink, run some cold water simultaneously.
WARNING: Some cleaning products are not suitable for use. Read all labels carefully.
DO NOT USE if they say “not suitable for use with ABS, acrylic or polystyrene”. Always rinse cleansers thoroughly within five minutes of application.

SCRATCH REMOVAL INSTRUCTIONS

1. For effective scratch removal and polishing, you will need to purchase these items.

- 1 sheet 1000 grit 3M® wet-dry sandpaper
- 1 sheet 1500 grit 3M® wet-dry sandpaper
- 1 sheet 2000 grit 3M® wet-dry sandpaper
- 1 small container of 3M® rubbing compound #05933

These items can be purchased at most auto supply stores that provide supplies to professional paint and body shops. Call before you go. Not all auto supply stores will have these items.

2. Start sanding with 2000 grit paper. Use small squares of paper about 2" x 2" for all sanding and use lots of water. The water serves as both a lubricant and to prevent residue buildup on the paper. Residue buildup shortens the effective life of the paper and may scratch the surface you're trying to polish.
3. 2000 grit paper is the finest grit available (the higher the number, the finer the grit). If you can't remove all of the scratches with 2000 grit, switch to 1500 grit. Remember to wash the paper frequently with water as you sand.
4. If all of the scratches can't be removed with 1500 grit, switch to 1000 grit. This should remove most fine scratches. If you have deep scratches or a gouge, coarser paper may have to be used (see chart to right). Be careful! Using grit that is too coarse may actually put in more scratches than it removes.
5. Once you have removed all of the scratches, by sanding with the finest paper possible, repeat the sanding process using successively finer grits of paper until you've once again sanded with 2000 grit.
6. Now use 3M® rubbing compound on a soft, damp cloth. Polish using considerable pressure to produce a smooth, shiny finish.

SUPERFICIAL SCRATCH 2000 grit
LIGHT SCRATCH 1500 – 2000 grit
MEDIUM SCRATCH 1000 – 2000 grit
DEEP GOUGE 600 – 2000 grit

SCRATCH / SANDPAPER GUIDE

LYONS PREMIUM CAST ACRYLIC KITCHEN SINK — LIFETIME LIMITED WARRANTY

Lyons Industries, Inc warrants to the original purchaser that this Kitchen Sink will be free of manufacturing defects, which affect the performance of this product for the use it was intended. The warranty period begins when the consumer/user purchases the unit.

FROM DATE OF PURCHASE

1st Year - Should the unit be otherwise than warranted, Lyons Industries, Inc will repair or exchange a defective unit. The exchange of a unit will be limited to supplying a replacement unit or component part of comparable size and style, and does not include any cost of removal, installation or transportation.

2nd Year - Should the unit be otherwise than warranted, Lyons Industries, Inc will pay 50% of the sink value toward repair or exchange of a defective unit. The exchange of a unit will be limited to supplying a replacement unit or component part of comparable size and style, and does not include any cost of removal, installation or transportation.

3rd Year - Should the unit be otherwise than warranted, Lyons Industries, Inc will pay 25% of the sink value toward repair or exchange of a defective unit. The exchange of a unit will be limited to supplying a replacement unit or component part of comparable size and style, and does not include any cost of removal, installation or transportation.

4 or More Years - Should the unit be otherwise than warranted, Lyons Industries, Inc will pay 10% of the sink value toward repair or exchange of a defective unit. The exchange of a unit will be limited to supplying a replacement unit or component part of comparable size and style, and does not include any cost of removal, installation or transportation. Lyons Industries, Inc reserves the right to require the return, at the purchaser's expense, of the damaged product for repair or exchange before providing the services under this warranty. Warranty does not cover damage that can be repaired by following the Scratch Removal Instructions or the Care and Cleaning Instructions. This warranty excludes normal wear and tear. This warranty shall be voided by improper maintenance contrary to use and care Instructions. This warranty does not apply to units installed in commercial or business establishments, hotels, or apartments. Nor does the warranty apply if the unit is moved from its place of initial installation, subject to accident, abuse or misuse. No warranty will apply if the unit is not installed in accordance with the instructions supplied by Lyons Industries, Inc, local building codes and ordinances or if the care and cleaning instructions have not been followed. Any implied warranty of fitness for a particular use or purpose, or warranty of merchantability is limited in duration to the express warranty provided herein unless a shorter period is allowed by law. Lyons Industries, Inc shall not be liable for incidental or consequential damages for any damage to building, its contents or occupants. Some states do not allow limitations of incidental or consequential damages so the above limitations and exclusions may not apply to you. In such a state, liability shall be limited to the extent permitted by state law. Any claim under this warranty must be made in writing, with your original proof of purchase enclosed to Lyons Industries, Inc, 30000 M-62 West, Dowagiac, Michigan 49047 to request performance by Lyons Industries, Inc under the terms of this warranty. After such notice, a prompt investigation of the claim shall be made by Lyons Industries, Inc who will promptly perform its obligation under the terms of this warranty.

FOR ASSISTANCE CALL (800) 458-9036