

ASSEMBLING & INSTALLATION INSTRUCTIONS PRODUCT# 51914

For Mini Pendant Mount Fixtures

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

HANGING THE FIXTURE (Fig. 2)

1. Shut off the power at the circuit breaker and remove the old fixture from ceiling, including the old crossbar.
2. Carefully unpack the new fixture and lay all the parts on a clear surface.
3. Hook the end of long crystals (J) to the middle loop of the fixture body (G) and the bottom loop of the arm (K). Hook the end of short crystals (H) to the top loop of the fixture body (G) and the top loop of the arm (K).

HANGING THE FIXTURE (Fig.1 and Fig.2)

4. Attach the crossbar (A) to the junction box using screws (B). The side of the crossbar marked "GND" must face out.
The junction box is not included.
5. While holding the canopy and lamp cluster towards the ceiling, connect the electrical wires as shown in Fig.3, making sure that all wire connectors are secured. You may have to wrap the connections with electrical tape. If there is a Ground Wire (green or bare copper) in your outlet box, connect the fixture's Ground Wire to it. Otherwise connect fixture's ground wire directly to the crossbar with the Green Screw provided. After wires being connected, tuck them carefully inside the Junction Box.
6. Open one end link of the chain (E) provided and connect to the fixture loop (F). Close the link.
7. Lace the fixture wires through the chain.
8. Open the other end link of the chain and hang the fixture on the loop at the ceiling. Close the link.
9. Lace the fixture wires, ground wires through the loop and canopy (C) and pull until taut.
10. Then cover the junction box with canopy (C), aligning the Screw of the crossbar with the hole of canopy and lock it with brass ball (D).
11. Place the tube (I) over the socket of the fixture body (G).
12. Hang the crystals (L) to the top loop of the arm (K). Hang the crystal (M) to the bottom loop of the fixture body (G). Hang the crystals (N) to the loop of the canopy (C).
13. Install the light bulb (not included) in accordance with the fixture's specifications: **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete Return power to the junction box and test the fixture.

Fig.1

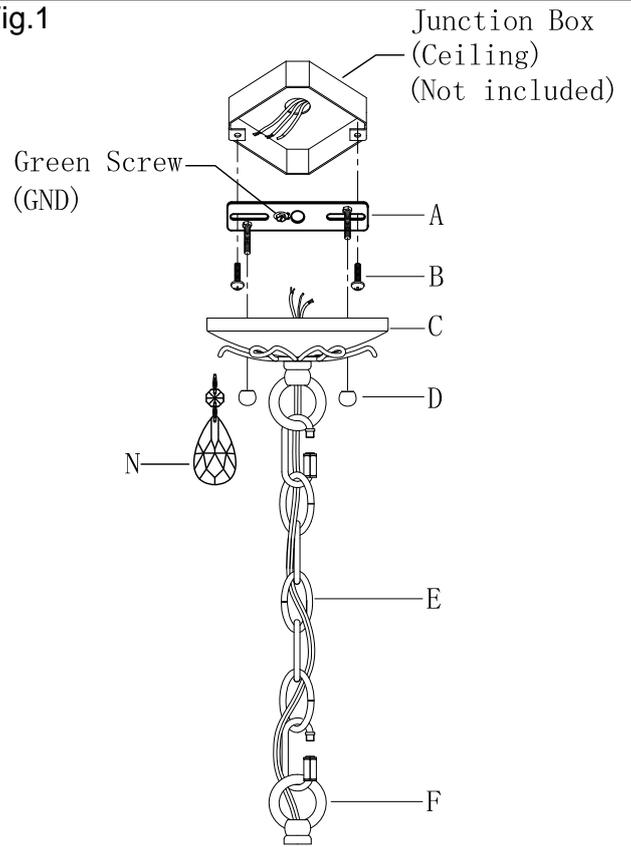


Fig.2


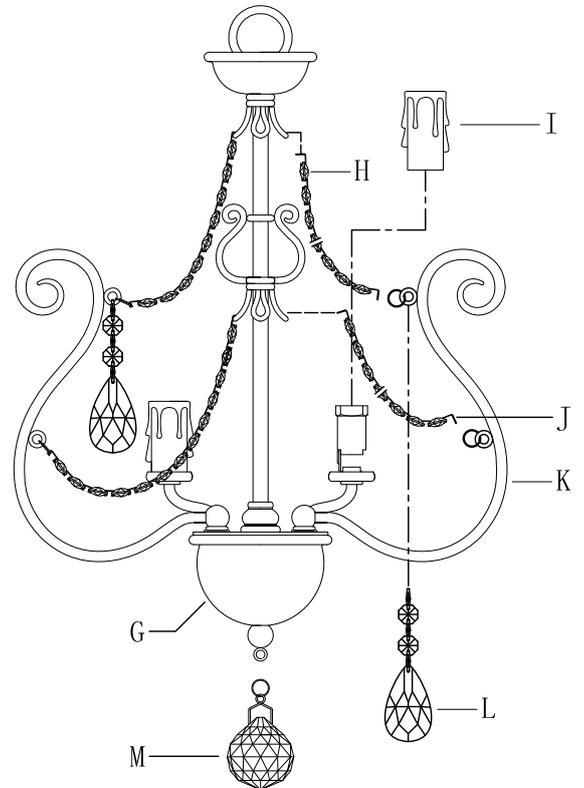


Fig.3

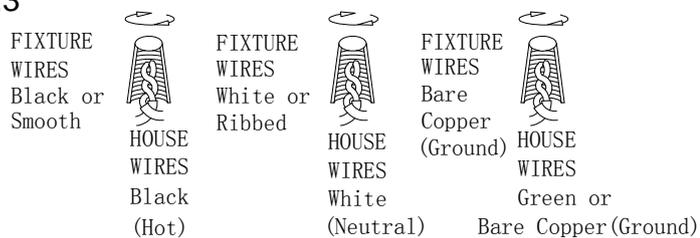

ASSEMBLING & INSTALLATION INSTRUCTIONS PRODUCT# 51914

For Semi Flush Mount Ceiling Fixtures

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

ASSEMBLING THE FIXTURE (Fig.1).

1. Shut off the power at the circuit breaker and remove the old fixture from ceiling, including the old crossbar.
2. Carefully unpack the new fixture and lay all the parts on a clear surface.
3. Attach the crossbar (A) to the junction box using screws (B). The side of the crossbar marked "GND" must face out.
The junction box is not included.
4. Loosen the loop (F) and the canopy (C), remove the loop (F) and the chain (E) (**Fig.3**)
5. Loosen and remove the loop (F) and the cup (R) (**Fig.4**).
6. Attach the column (Q) and the canopy (C), the washer (P) to the center of the fixture body (G), then lock the canopy (C) with the hex nut (O).
7. While holding the column assembly towards the ceiling, connect the electrical wires as Shown in **Fig.2**, making sure that all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. Otherwise connect fixture's ground wire directly to the crossbar with the green screw provided. After wires are connected, tuck them carefully inside the Junction Box.
8. Put the fixture body (G) onto the junction box, aligning screws on crossbar with mounting holes in canopy and lock it securely with the brass ball (D).
9. Place the tube (I) over the socket of the fixture body (G).
10. Hook the end of long crystals (J) to the middle loop of the fixture body (G) and the bottom loop of the arm (K).
11. Hook the end of short crystals (H) to the top loop of the fixture body (G) and the top loop of the arm (K).
12. Hang the crystals (L) to the top loop of the arm (K). Hang the crystal (M) to the bottom loop of the fixture body (G). Hang the crystals (N) to the loop of the column (Q).
13. Install the light bulbs (not included) in accordance with the fixture's specifications: **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the junction box and test the fixture.

Fig.1

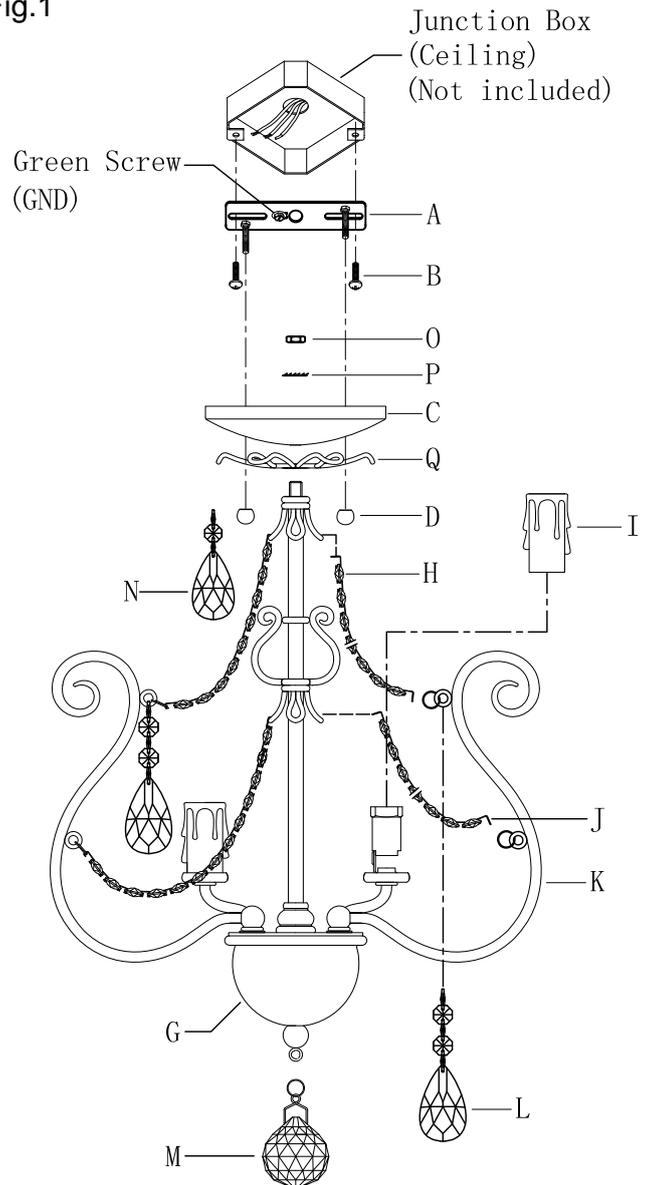


Fig.3

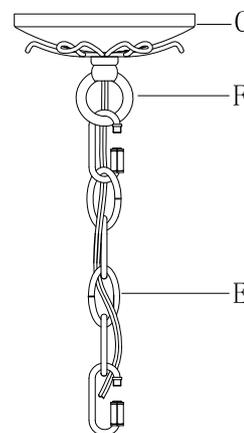


Fig.4




Fig.2

<p>FIXTURE WIRES Black or Smooth</p>	<p>HOUSE WIRES Black (Hot)</p>	<p>FIXTURE WIRES White or Ribbed</p>	<p>HOUSE WIRES White (Neutral)</p>	<p>FIXTURE WIRES Bare Copper (Ground)</p>	<p>HOUSE WIRES Green or Bare Copper (Ground)</p>
--	------------------------------------	--	--	---	--