

Please go to [www.quoizel.com](http://www.quoizel.com) for product cleaning tips. Go to the **Care + Maintenance** selection.

**Tools Required:** Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

**Light Source:** (7) MR-16 GU10 base bulbs (Supplied), 50W Maximum.

**Estimated Assembly Time:** 30-45 minutes

**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

**IMPORTANT:** Do **NOT** remove the bags on cables before you assemble Crystal Drops.


### ⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.


Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.

### Package Contents

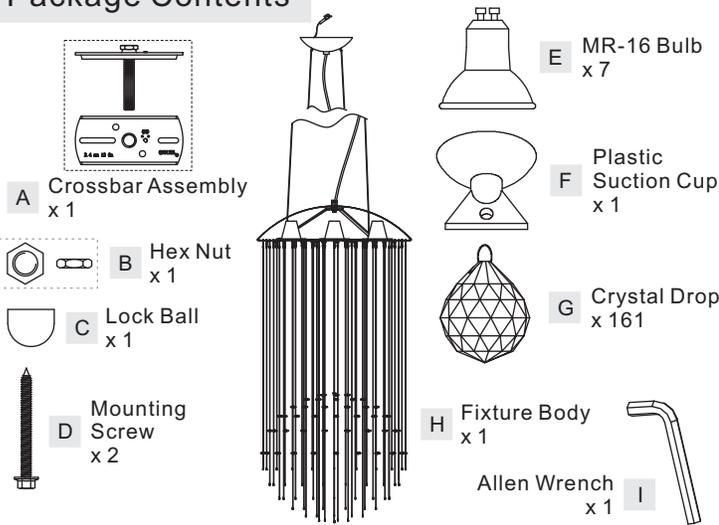


### STEP 1 – Adjust the Fixture Body

- Push the Button (Refer to **Front View**) and pull the Wire Rope to adjust the length of Wire Rope to achieve your desired fixture height. Unlock Set Screw on Wire Clasp A and then adjust the Wire Clasp A touch the Nipple in the Canopy. By using Allen Wrench (I), tighten the Set Screw in the Wire Clasp A until snug.
- Remove the Screw to open the Wire Clasp B. Adjust the length of Wire to achieve your desired fixture height. Secure by reinstalling the Screw. Loosen Clasp B prior to Step A if Necessary.

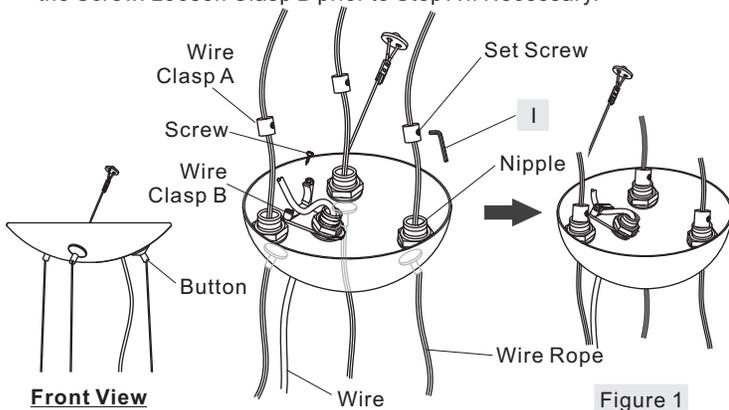


### STEP 2 – Install Crossbar Assembly

- Place Crossbar (A) onto Outlet Box and line up mounting holes with a set of holes on Crossbar (A). Thread Outlet Box Screws (not supplied) into the mounting holes on the Outlet Box and tighten until snug to secure the Crossbar (A). By using a screwdriver, thread Mounting Screws (D) into the Structural or Bridging Member and tighten until snug.

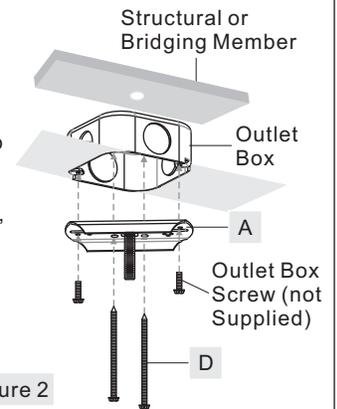

### STEP 3 – Attach Lanyard

- The purpose of the lanyard is to provide the installer a means to support the fixture from the junction box while connecting the electrical wires. This enables the fixture to hang from the junction box and your hands are free to make the wire connections.
- Turn the Button Stop so it may be inserted into the Crossbar slot. Make sure the Button Stop is completely inside the Crossbar. Slowly release the fixture to make sure it is supported by the Button Stop. Proceed to the wiring steps in the next step. Once you are complete with the wiring there is nothing to do with Lanyard. The Lanyard will push into the junction box when the fixture is placed for final mounting.

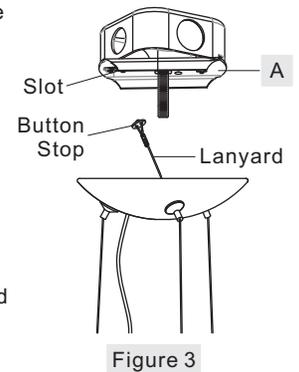

### STEP 4 – Make Wire Connections

- Use standard wire connectors to make all wire connections. (Connectors are not included with fixture.) Strip and prepare wire ends according to instructions supplied with connectors.
- If the electrical wire is going to be cut shorter than provided you will need to identify the "L" line wire and the "N" wire before you cut the excess wire off. One is labeled N and the other labeled L. The third wire has a green stripe on it. To do this strip back the clear wire covering the 3 fixture wires as far as you need to. This will expose each fixture wire individually. Separate the "L" wire from the other two and re-label the wire near where you want to make the cut. Be

**Thank you for purchasing a Quoizel product.**  
**Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700**  
**or visit us on-line at [www.quoizel.com](http://www.quoizel.com)**

sure to mark the wire on the side of the fixture and not on the excess wire being cut and removed. Do the same labeling with the "N" wire.

- C. Connect White Supply Wire from the Outlet Box to Wire Labeled "N" from fixture.
- D. Connect Black (or Red) Supply Wire from the Outlet Box to Wire Labeled "L" from fixture.
- E. Connect Ground Wire from the Outlet Box to Green Striped Wire from fixture.
- F. Twist connectors until wires are tightly joined together.
- G. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

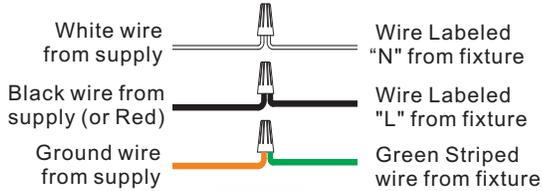


Figure 4

**STEP 5 - Attach Ceiling Canopy to Crossbar**

- A. Lift the fixture up and pass the Ceiling Canopy over the Nipple on the Crossbar Assembly (A). Secure by threading the Hex Nut (B) onto the Nipple. Hand tighten until snug.
- B. Thread the Lock Ball (C) onto the Nipple and hand tighten until snug.

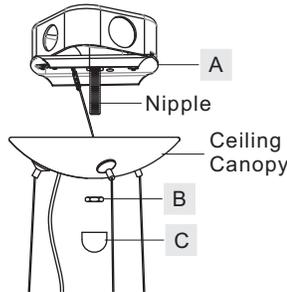


Figure 5

**STEP 6 - Install Crystal Drops**

- A. Start from the smallest to the largest circle. Remove the bag on one cable and attach one Crystal Drop (G) to the cable on the Fixture Body (H) one by one until all Crystal Drops (G) are assembled.
- B. Carefully remove Protective Film from Fixture Body (H) to avoid cables are twisted together.  
Note: Gloves are required to avoid leaving fingerprints or scratches on Fixture Body (H).
- C. Remove the Plastic Strip between the cup and the bottom panel, which is for shipping purpose to protect the fixture.

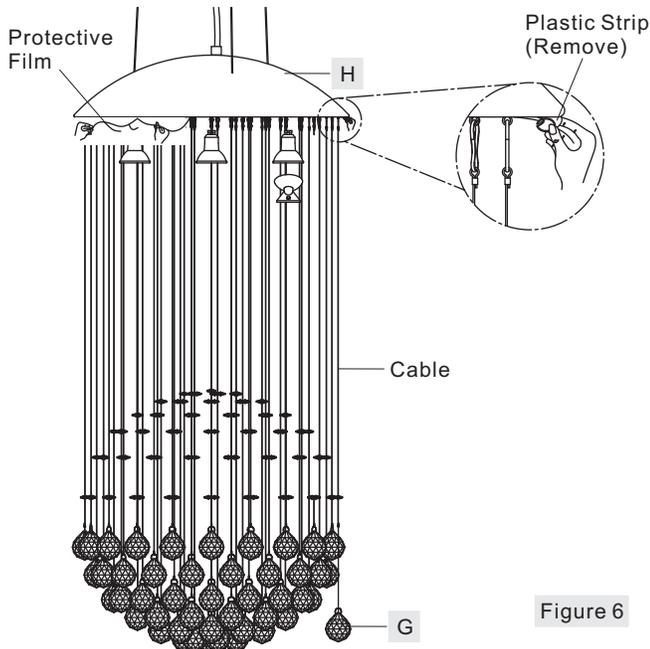


Figure 6

**STEP 7 - Install MR-16 Bulb**

- A. Put the Plastic Suction Cup (F) onto the MR16 - GU10 Bulb (E) as shown.
- B. Install the MR16 - GU10 Bulb (E) into the Socket by aligning the pins on the Bulb with the keyholes in the Socket. Once they are aligned, gently push the MR16 - GU10 Bulb (E) into the keyholes and twist the MR16 - GU10 Bulb (E) to lock it in place.
- C. Remove the Plastic Suction Cup (F) from the MR16 - GU10 Bulb (E).





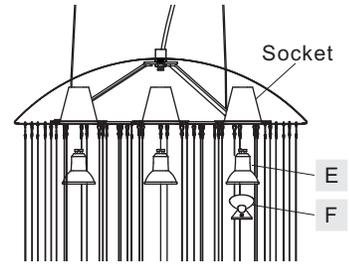


Figure 7

Your fixture is now assembled and ready to use. Enjoy!

PCGX1826C  
FINISH: POLISHED CHROME

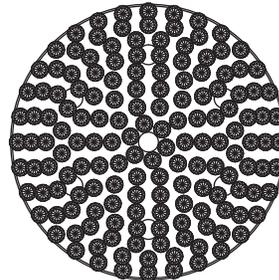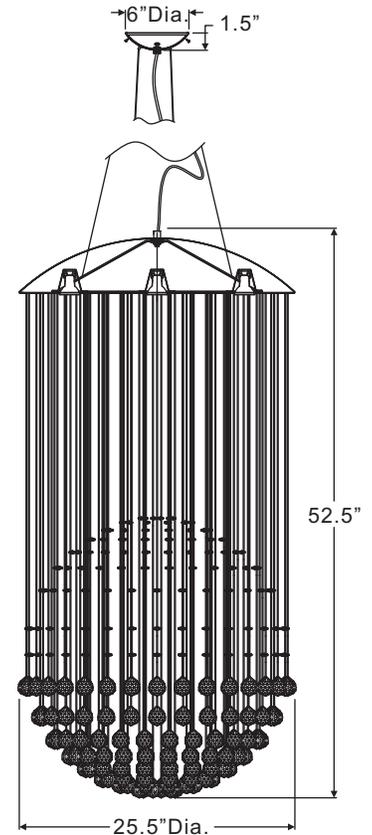

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/4"

	NO.	PART NUMBER	REPLACEMENT PART	REQ.
(7) 50W Maximum MR-16 GU10 Bulbs (Supplied)	1			

Thank you for purchasing a Quoizel product.  
Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700  
or visit us on-line at [www.quoise.com](http://www.quoise.com)