

**Tools Required:** Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

**Bulb Recommended:** (6) G9 Xenon clear bulbs (supplied), 40W Maximum

**Estimated Assembly Time:** 20-30 minutes

**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

### ⚠ Warnings and Cautions


Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.

Do not touch the bulb with bare hands use a cloth or glove.

### Package Contents

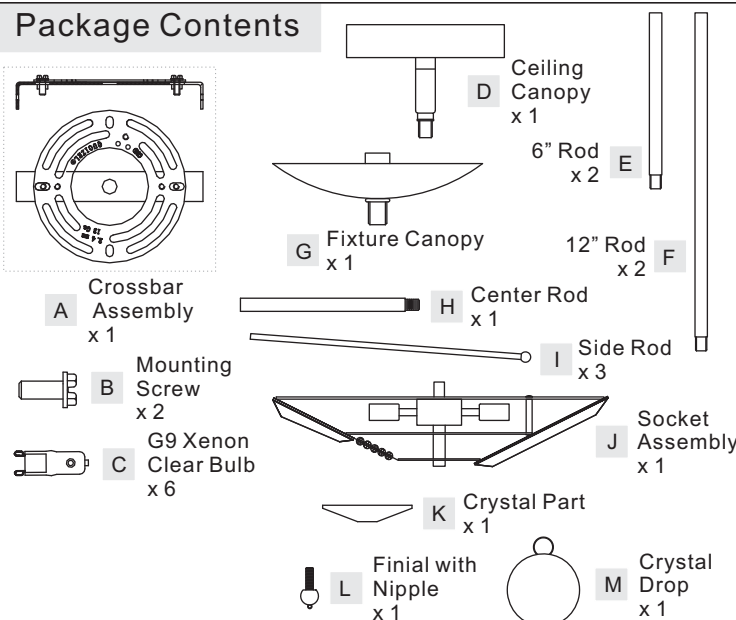

### STEP 1 – Install Center Rod, Fixture Canopy and Side Rods

- Thread Center Rod (H) to the coupling on the top center of Socket Assembly (J) and hand tighten until snug.
- Thread Fixture Canopy (G) onto top end of Center Rod (H). Align the holes on the side of the Fixture Canopy (G) to spider on the Socket Assembly (J) before tighten Fixture Canopy (G).
- Place Side Rod (I) through the holes on the side of the Fixture Canopy (G). Insert the bottom end of Side Rod (I) to the holes on the Spider.

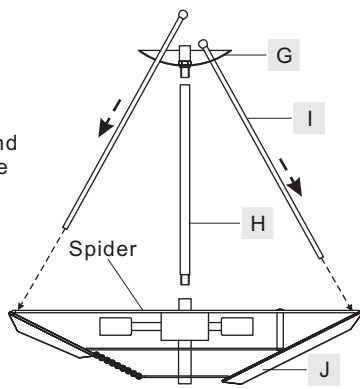


Figure 1

### STEP 2 – Install Crystal Part and Crystal Drop

- Remove Nipple from Finial (L). Thread the Nipple into the end of the Rod in the bottom center of Socket Assembly (J). Tighten until snug.
- Pass Crystal Part (K) over the Nipple and secure with Finial (M). Hand tighten until snug.
- Attach Crystal Drop (M) to Finial (L).




Figure 2

### STEP 3 – Assemble Rods and Ceiling Canopy

- Determine the Rods (E/F) to be assembled to the fixture according to your hanging height.
- Pass the supply wires and ground wire through the chosen rods (E/F) and the Ceiling Canopy (D). Thread the fixture, the chosen Rods (E/F) and the Ceiling Canopy (D) together. Hand tighten until snug.

Suggested rods for Ceiling height :

- 8' ceiling : use (1) 12" rod
- 9' ceiling : use (2) 12" rods
- 10' ceiling: use (2) 6" rods and (2) 12" rods

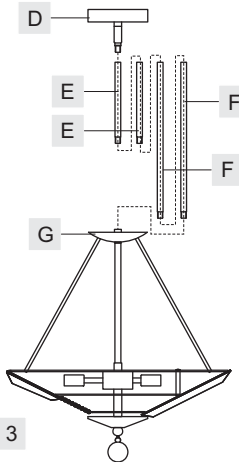


Figure 3

### STEP 4 – Attach Crossbar to Outlet Box

- Attach the Crossbar Assembly (A) to Outlet Box and secure by threading Outlet Box Screws (not supplied) into the Mounting Holes on the Outlet Box. Tighten until snug.




Figure 4

### STEP 5 - Wire Connections

- Use standard wire connectors (not included) to make all wire connections. (Connectors are not included with fixture.) Twist

Thank you for purchasing a Quoizel product.  
Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700  
or visit us on-line at [www.quoizel.com](http://www.quoizel.com)

connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

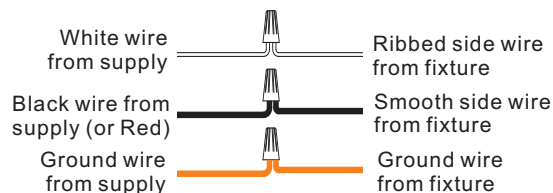


Figure 5

#### STEP 6 - Install Ceiling Canopy to Ceiling

- A. Place the Ceiling Canopy (D) over the Crossbar Assembly (A). Line up Holes on the side of the Ceiling Canopy (D) and the Mounting Hole on the Crossbar Assembly (A). Secure by threading Mounting Screws (B) into the Crossbar Assembly (A). Tighten until snug.




Figure 6

#### STEP 7 - Install Bulbs

- A. This fixture uses G9 Xenon clear bulbs (C). Maximum 40 watts. Insert Bulbs and seat properly into place.

**IMPORTANT:** Do not touch the bulb with bare hands use a cloth or glove.

Your fixture is now assembled and ready to use. Enjoy!






Figure 7

#### CAUTION FOR BULB REPLACING



- When replace bulb, turn off power and allow lamp to cool. For safety purpose, wear gloves and eye protection.
- If bulb is scratched or cracked, DO NOT use the lamp to avoid breakage during use or installation.
- Use only in fixtures rated for lamps wattage and voltage.
- Lamp operate under high pressure generating intense heat. Prevent contact with liquid and combustible materials.

PCSP2823C

FINISH: POLISHED CHROME



**Socket Orientation**

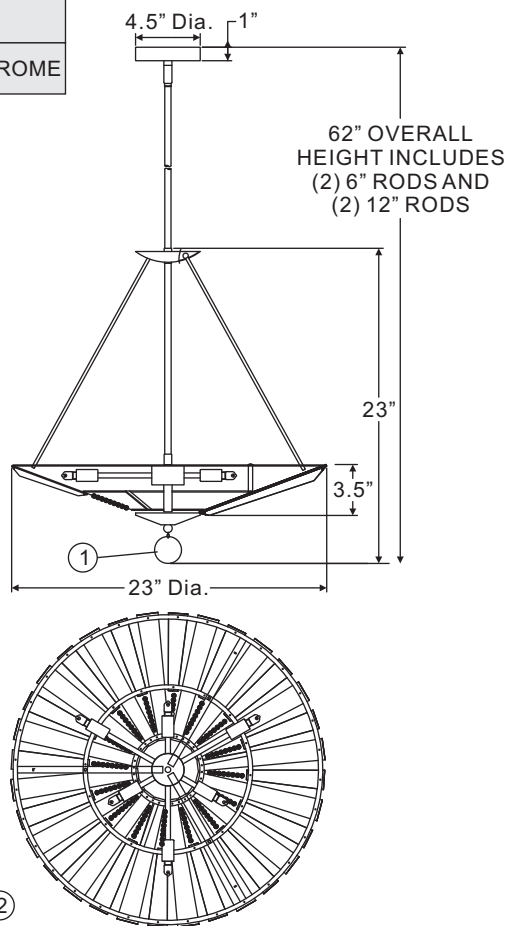

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/2"

NO.	PART NUMBER	REPLACEMENT PART	REQ.
1	G3957CR	CRYSTAL DROP	1
2	I1202SC	G9 XENON CLEAR BULB	4

Thank you for purchasing a Quoizel product.  
Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700  
or visit us on-line at [www.quoizel.com](http://www.quoizel.com)