

Assembly Instruction Sheet #IS-PCSR8602C For Styles PCSR8602C and PCSR8602CLED

Please go to www.quoizel.com for product cleaning tips. Go to the Care + Maintenance selection.

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Light Source: (2) LED G94.5W Bulbs, Maximum 40W G9 Xenon Clear Bulbs

Estimated Assembly Time: 20-30 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.


Note: If the style you purchased is PCSR8602Cit is NOT provided with light bulbs. If the style you purchased is PCSR8602CLED it is provided with (2) G9 LED light bulbs. The G9 LED bulb is an energy efficient bulb and will reduce the use of electricity in comparison to G9 Xenon bulbs, saving you money. Please go to Quoizel.com to see the G9 LED bulb specifications provided with your fixture.

$oldsymbol{\Delta}$ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.


These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.

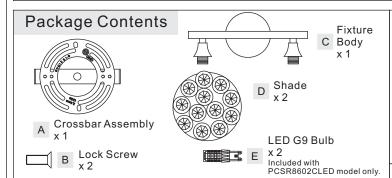

STEP 3 - Install Fixture Body

A. Place the backplate of the Fixture Body (C) over the outlet box and line up the hole on the side of the backplate to the mounting holes on the flat bar. Secure by threading Mounting Screw (B) into the mounting hole on the flat bar. Hand tighten until



STEP 1 - Install Crossbar Assembly

A. Attach the Crossbar Assembly (A) to the Outlet Box with the head of the Green Ground Screw facing you. Make sure the Flat Bar is vertical before you tighten it to outlet box with outlet box screws (not included). Hand tighten until snug.





Figure 1

Green

STEP 2 - Wire Connections

© 2015 Quoizel Inc.

A. Use standard wire connectors (not included) to make all wire connections. (Connectors are not included with fixture.) Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.




STEP 4 - Install Bulbs and Shades

A. Install either the G9 Xenon bulb as specified (not provided) or install the G9 LED bulbs (provided) if the fixture purchased is the LED model.

Note: This fixture is rated to use 40W maximum G9 Xenon bulbs. You may use a lower wattage G9 Xenon or if you purchased the LED model it is supplied with G9 LED bulbs.

B. Thread Shade (D) onto the Socket and hand tighten until snug.

Your fixture is now assembled and ready to use. Enjoy!



CAUTION FOR BULB REPLACING

When replacing bulbs, turn off power and allow lamp to cool. For safety purpose, wear gloves and eye protection.

Thank you for purchasing a Quoizel product. Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700 or visit us on-line at www.quoizel.com

December 2015

1of2

