

QUOIZEL

6 CORPORATE PARKWAY
GOOSE CREEK, SC. 29445
www. quoizel. com

Quoizel, Inc.
6 Corporate Parkway
Goose Creek, SC 29445

Customer Service
Phone 631.273.2700
Fax 631.231.7102
www. quoizel. com

Assembly Instruction Sheet #IS-BRN8412IB For Style BRN8412IB

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Bulb Recommended: (2) Medium Base Decorative Filament 60W bulbs (provided), Maximum 100W, Alternate bulb (2) 23W CFL Maximum.

Estimated Assembly Time: 30-45 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

Fixture can only be mounted in the direction indicated on page 2.

⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.


These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.

Package Contents



A Bulb
x 2



B Fixture
x 1

STEP 1 – Adjust the Glass panels

Remove the fixture from the package and check glass panels. If there are any loosen glass panels, please refer to the follows to make adjustment.

- Remove the Cage from the Fixture by unscrewing Lock Screws.
- Remove the Glass Panel Holder from the top of the Cage by unlocking Hex Nuts.
- Adjust Glass Panels to proper location and then secure with the removed Glass Panel Holder. Hand tighten until with Hex Nuts.
- Place Cage back onto Fixture and secure with Lock Screws.


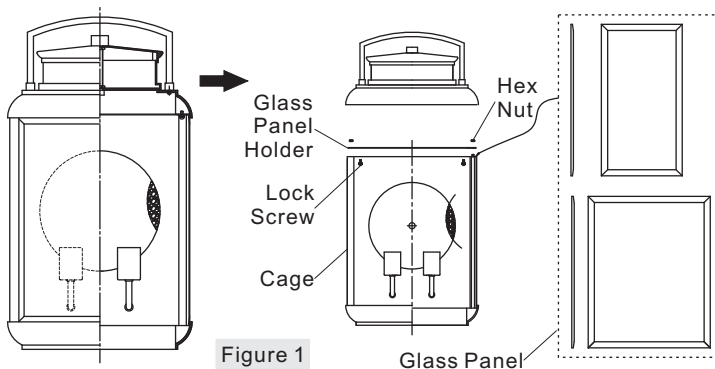


Figure 1

STEP 2 – Install Inner Backplate

- Pass the supply wires through the existing hole on the Inner Backplate (AA).
- Attach the Inner Backplate (AA) to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws (not included). Tighten until snug.



Hardware Contents

AA Inner Backplate
x 1

BB Lock Screw
x 2


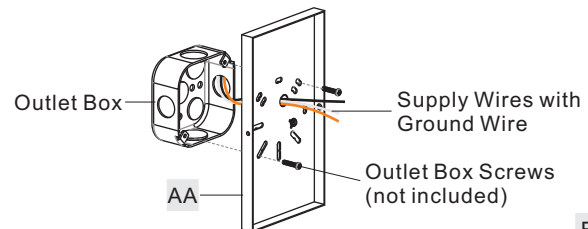


Figure 2

STEP 3 - Attach Lanyard

- The purpose of the lanyard is to provide the installer a means to support the fixture from the junction box while connecting the electrical wires. This enables the fixture to hang from the junction box and your hands are free to make the wire connections.
- Turn the Button Stop so it may be inserted into the Inner Backplate slot. Make sure the Button Stop is completely inside the Inner Backplate. Slowly release the fixture to make sure it is supported by the Button Stop. Proceed to the wiring steps in the next step. Once you are complete with the wiring there is nothing to do with Lanyard. The Lanyard will push into the junction box when the fixture is placed for final mounting.

Figure 3

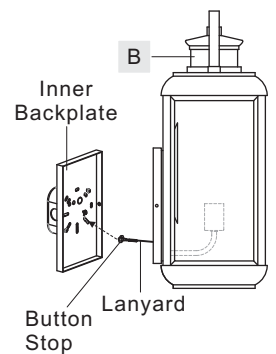

STEP 4 - Wire Connections

- Use standard wire connectors (not included) to make all wire connections. (Connectors are not included with fixture.) Strip and prepare wire ends according to instructions supplied with connectors.
- Connect White Supply Wire from the Outlet Box to Ribbed side Wire from fixture.
- Connect Black (or Red) Supply Wire from the Outlet Box to Smooth

Thank you for purchasing a Quoizel product.
Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700
or visit us on-line at www. quoizel. com

side Wire from fixture.

D. Connect Ground Wire from the Outlet Box to Ground Wire from fixture.

E. Twist connectors until wires are tightly joined together.

F. Wrap each connection with approved Electrical tape and carefully stuff all the connected wires into the Outlet Box.

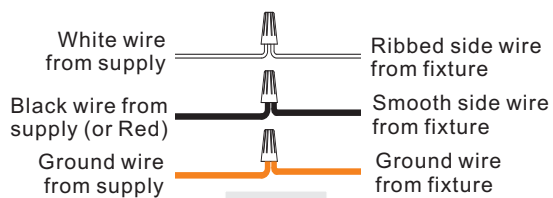


Figure 4

STEP 5 – Install Fixture to Inner Backplate

A. Attach the Fixture (B) over the Inner Backplate (AA) and secure with the Lock Screws (BB). Tighten until snug with screwdrivers.

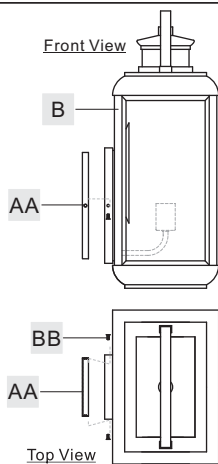


Figure 5

STEP 6 – Install Bulb

A. This fixture uses standard bulb with medium base . Maximum 100 watts.

B. Insert bulb and screw snugly into place.




Figure 6

STEP 7 – Apply Silicone Sealer

A. Make sure exterior wall surface and fixture backplate are free of dirt before applying caulk. Using exterior grade caulk, caulk over top of backplate and down other side. Do not caulk bottom of fixture backplate to ensure proper moisture drainage.

Your fixture is now assembled and ready to use. Enjoy!






Figure 7

BRN84121B

FINISH: IMPERIAL BRONZE



Fixture can only be mounted in the direction indicated

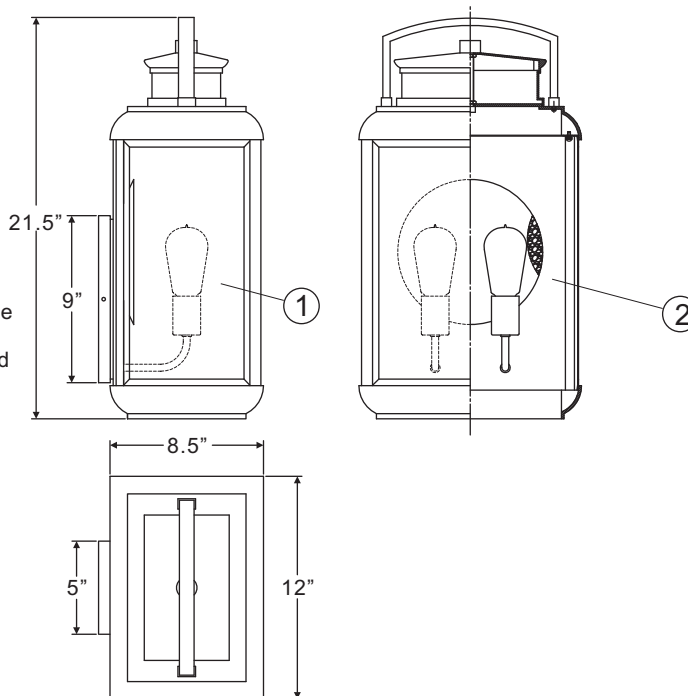

(2)Medium Base Decorative Filament 60W bulbs (provided), Maximum 100W.

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/2"

NO.	PART NUMBER	REPLACEMENT PART DESCRIPTION	REQ.
1	G3828PA	GLASS PANEL CLEAR BEVELED	2
2	G3829PA	GLASS PANEL CLEAR BEVELED	1

Thank you for purchasing a Quoizel product.
Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700
or visit us on-line at www.quoise.com