

Please go to www.quoizel.com for product cleaning tips. Go to the **Care + Maintenance** selection.

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Light Source: (8) G9 Xenon Clear Bulbs (supplied), 40W Maximum

Estimated Assembly Time: 30-45 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

⚠ Warnings and Cautions


Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.


Do not touch the bulb with bare hands use a cloth or glove.

Package Contents

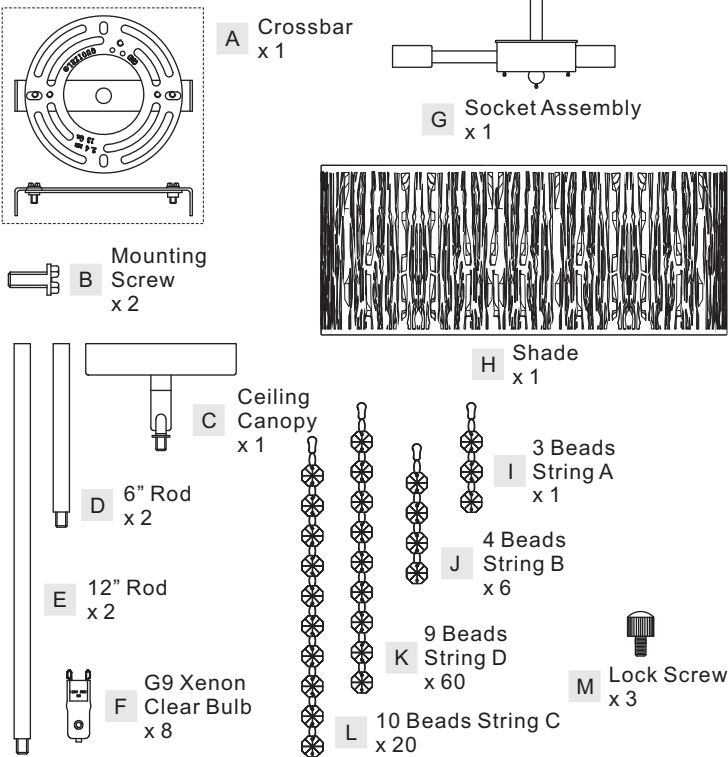

STEP 1 – Attach Crossbar to Outlet Box

A. Attach the Crossbar (A) to Outlet Box and secure by threading Outlet Box Screws (not supplied) into the Mounting Holes on the Outlet Box. Tighten until snug.

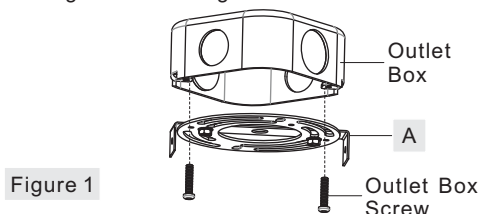

STEP 2 – Assemble the Rods and Ceiling Canopy to Socket Assembly

A. Determine the Rods (D/E) to be assembled to the coupling on the top center of the Socket Assembly (G) according to your hanging height.

C. Pass the supply wires through the chosen rods (D/E) and the Ceiling Canopy (C). Thread the Socket Assembly (G), the chosen Rods (D/E) and the Ceiling Canopy (C) together. Hand tighten until snug.

Suggested rods for Ceiling height :


8' ceiling : use (2) 12" rods

9' ceiling : use (2) 6" rods

and (2) 12" rods

Supply Wires and Ground Wire

Figure 2

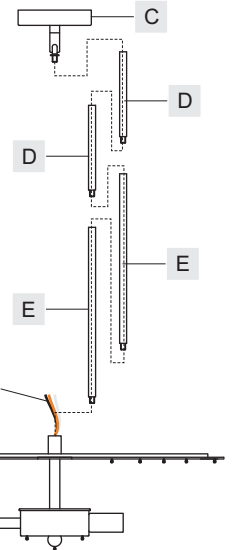

STEP 3 - Wire Connections

A. Use standard wire connectors (not included) to make all wire connections. (Connectors are not included with fixture.) Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.


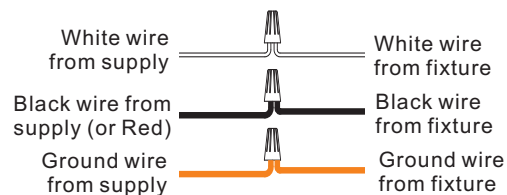


Figure 3

STEP 4 – Attach Ceiling Canopy to Crossbar

A. Line up the holes on the side of the Ceiling Canopy (C) to the mounting holes on the Crossbar (A). Secure them with Mounting Screws (B). Tighten until snug.



Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700 or visit us on-line at www.quoizel.com

STEP 5 - Attach Bead Strings to Fixture Body

- A. Attach 3 Beads Strings A (I) to location "A" on the bottom center of the Socket Assembly (G). Attach 4 Beads Strings B (J) to locations "B" on the bottom of the Junction Box. Attach 10 Beads Strings C (L) to locations "C" on the Socket Assembly (G). Attach 9 Beads strings D (K) to locations "D" on the Socket Assembly (G).

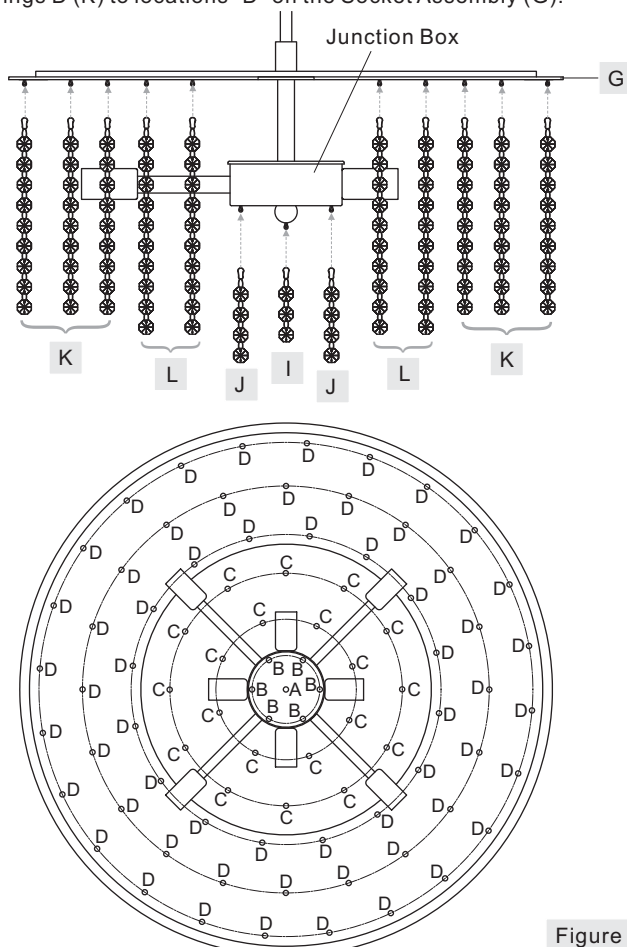


Figure 5

BEAD STRING DISTRIBUTION GRAPH

STEP 6 - Install Shade and Bulbs

- A. This fixture uses G9 Xenon Clear Bulbs (F). Maximum 40 watts. Insert bulb and seat properly into place.
IMPORTANT: Do not touch the bulb with bare hands use a cloth or glove.
- B. Place the Shade (H) over bead strings and attach Tabs on the top edge of the Shade (H) to the Bracket on the Socket Assembly (G). Secure them together by threading Lock Screws (M) onto Tabs. Hand tighten until snug.
- C. Remove Protective Film from the bottom of the Shade (H).

Your fixture is now assembled and ready to use. Enjoy!

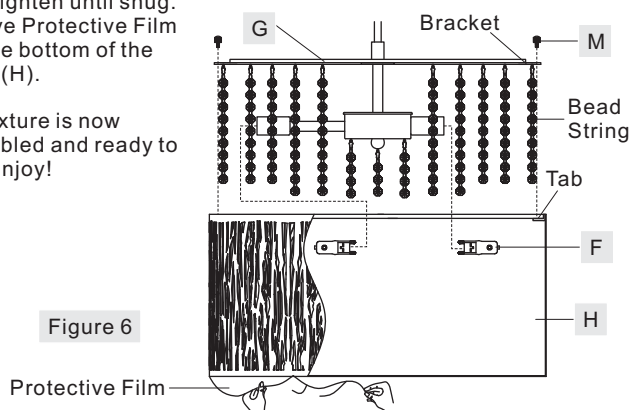


Figure 6



CAUTION FOR BULB REPLACING

- A. When replace bulb, turn off power and allow lamp to cool. For safety purpose, wear gloves and eye protection.
- B. If bulb is scratched or cracked, DO NOT use the lamp to avoid breakage during use or installation.
- C. Use only in fixtures rated for lamps wattage and voltage.
- D. Lamp operate under high pressure generating intense heat. Prevent contact with liquid and combustible materials.

PCGO1822C

FINISH: POLISHED CHROME

NOTE: ALL DIMENSIONS ARE
 ROUNDED UP TO THE NEAREST 1/4"

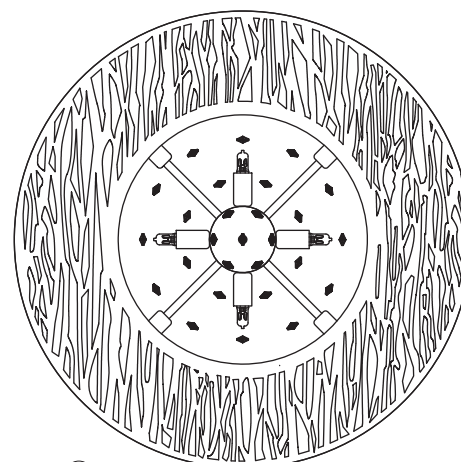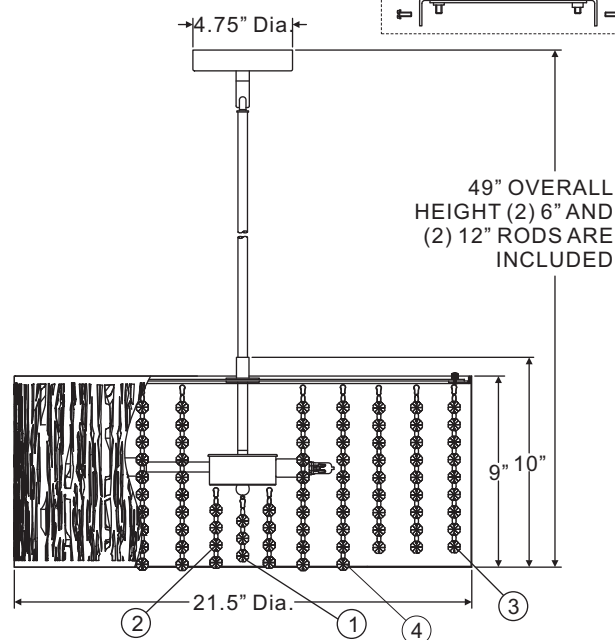

NO.	PART NUMBER	REPLACEMENT PART	QTY.
1	G12729CR	3 BEADS STRING	1
2	G12732CR	4 BEADS STRING	6
3	G12731CR	9 BEADS STRING	60
4	G12733CR	10 BEADS STRING	20
5	I1202SC	G9 XENON CLEAR BULB	8

(8) 40W Maximum
 G9 Xenon Clear
 Bulbs (Supplied)

Thank you for purchasing a Quoizel product.
 Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700
 or visit us on-line at www.quoizel.com