

Please go to www.quoizel.com for product cleaning tips. Go to the **Care + Maintenance** selection.

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Light Source: (2) A19 Medium Base bulbs 100W Maximum, Alternate bulbs (2) 23W CFL.

Estimated Assembly Time: 20-30 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.


⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.


These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.


Package Contents



A Fixture Body
x 1




B Shade
x 2



C Socket Collar
x 2


Hardware Contents




AA Crossbar
x 1



BB Lock Washer
x 2



CC Hex Nut
x 2



DD Mounting Screw
x 2



EE Mounting Ball
x 2



FF Alternate Short
Mounting screw
x 2

STEP 1 – Attach Mounting Screws, Lock Washers and Hex Nuts to Crossbar

A. Line up a set of holes on the Crossbar (AA) and Holes on the Backplate of the Fixture Body (A). Thread Mounting Screws (DD) or Alternate Shorter Mounting Screws (FF) into the holes on the Crossbar (AA). Pass Lock Washers (BB) and thread Hex Nuts (CC) onto the Mounting Screws (DD) or Alternate Shorter Mounting Screws (FF). Hand tighten until snug.

Note: Use the Alternate Shorter Mounting Screw (B) if your installation requires a shorter mounting screw.

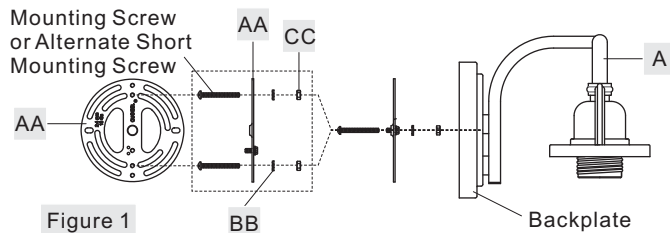


Figure 1

(Step 3 Continued)

Balls (EE). Note: The backplate on Fixture Body (A) should be snug against the wall and the Mounting Balls (EE). If not, adjust the length of the Mounting Screws (DD) or Alternate Short Mounting Screws (FF) by unscrewing the Hex Nut (CC) and Lock Washer (BB) and then screwing Mounting Screws (DD) or Alternate Short Mounting Screws (FF) in or out of the Crossbar (AA) until the correct length is achieved. Once the backplate on Fixture Body (A) is secure, remove the Mounting Ball (EE) and Fixture Body (A) and proceed to Step 4.

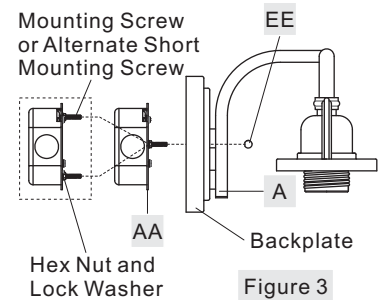


Figure 3

STEP 2 – Attach Crossbar to Outlet Box

A. Pass the supply wires through the Crossbar (AA). Attach the Crossbar (AA) to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws (not included). Tighten until snug.

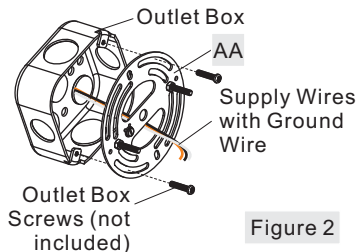


Figure 2

STEP 4 - Wire Connections

A. Use standard wire connectors (not included) to make all wire connections. (Connectors are not included with fixture.) Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

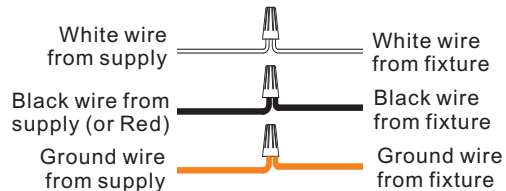


Figure 4

STEP 3 – Fit Backplate to Crossbar Assembly

A. Fit the backplate on Fixture Body (A) to Mounting Screws (DD) or Alternate Short Mounting Screws (FF) and secure with Mounting

STEP 5 – Install Fixture Body

A. Carefully tuck all wires into the outlet box and position the backplate of Fixture Body (A) over the outlet box. Align the holes in the

Thank you for purchasing a Quoizel product.
Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700
or visit us on-line at www.quoizel.com

(Step 5 Continued)

backplate with the Mounting Screws (DD) or Alternate Short Mounting Screws (FF). Secure with Mounting Balls (EE) and hand tighten until snug.


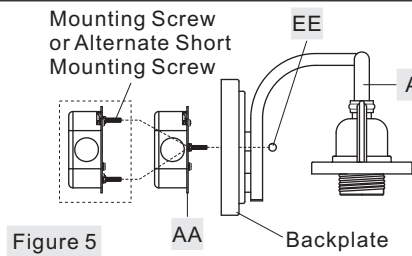


Figure 5

DBN8602BN
FINISH: BRUSHED NICKEL

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/4"

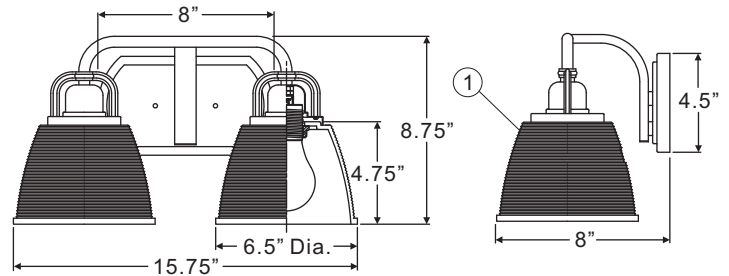

STEP 6 - Install Shades and Bulbs

- A. Place the Shade (B) over the socket and secure with the Socket Collar (C). Hand tighten until snug.
- B. This fixture uses standard bulb with medium base. Maximum 100 watts. Insert bulb and screw snugly into place.



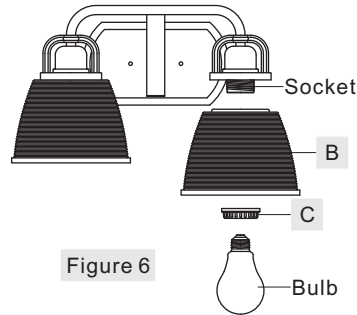


Figure 6

Your fixture is now assembled and ready to use. Enjoy!



(2) 100W Medium Base Bulbs (Not Supplied)



NO.	PART NUMBER	REPLACEMENT PART	QTY.
1	G12063SH	SHADE	2

Thank you for purchasing a Quoizel product.
Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700
or visit us on-line at www.quoizel.com