QUOIZEL
6 CORPORATE PARKWAY
GOOSE CREEK, SC. 29445
www. quoizel. com

Assembly Instruction Sheet #IS-DBN8701
For Styles DBN8701BN and DBN8701PN

Please go to **www.quoizel.com** for product cleaning tips. Go to the **Care + Maintenance** selection.
Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.
Light Source: (1) A19 Medium Base Bulb 100W Maximum.
Estimated Assembly Time: 20-30 minutes
Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents

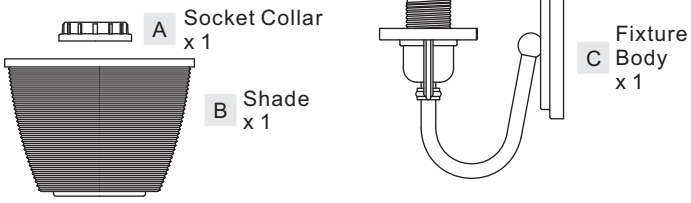

Hardware Contents

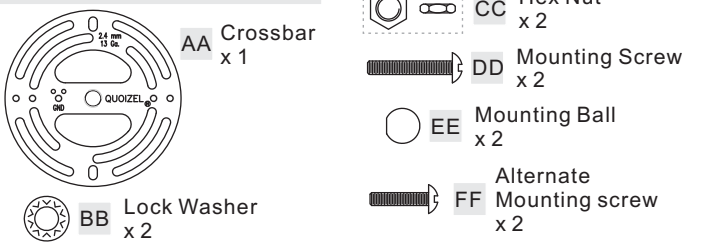

STEP 1 – Attach Mounting Screws, Lock Washers and Hex Nuts to Crossbar

A. Line up a set of holes on the Crossbar (AA) and Holes on the Backplate of Fixture Body (C). Thread Mounting Screws (DD) or Alternate Shorter Mounting Screws (FF) into the holes on the Crossbar (AA). Pass Lock Washers (BB) and thread Hex Nuts (CC) onto the Mounting Screws (DD) or Alternate Shorter Mounting Screws (FF). Hand tighten until snug.

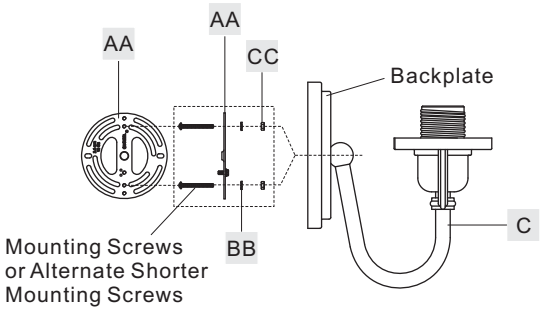

Figure 1

STEP 2 – Attach Crossbar to Outlet Box

A. Pass the supply wires through the Crossbar (AA). Attach the Crossbar (AA) to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws (not included). Tighten until snug.



Figure 2

STEP 3 – Test Fitting Backplate to Mounting Screws

A. Fit the backplate on Fixture Body (C) to Mounting Screws (DD) or Alternate Shorter Mounting Screws (FF) and secure with Mounting Balls (EE). Note: The backplate on Fixture Body (C) should be snug against the wall and the Mounting Balls (EE). If not, adjust the length of the Mounting screws (DD) or Alternate Short Mounting Screws (FF) on the Crossbar (AA) by unscrewing the Hex Nut (CC) and Lock Washer (BB) and then screwing the Mounting screws (DD) or Alternate Short Mounting Screws (FF) in or out of the Crossbar (AA) until the correct length is achieved. Once the Backplate on Fixture Body (C) is secure, remove the Mounting Balls (EE) and Fixture Body (C) and proceed to Step 4.

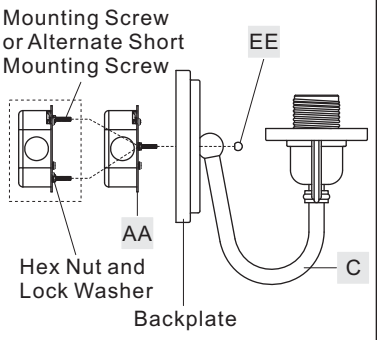

Figure 3

STEP 4 - Wire Connections

A. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

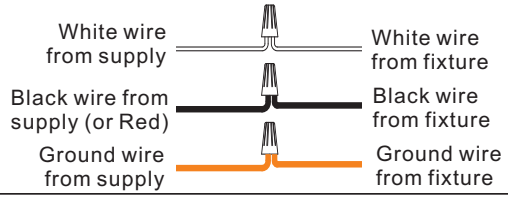

Figure 4

Thank you for purchasing a Quoizel product.
Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184
or visit us on-line at www.quoizel.com

© 2016 Quoizel Inc.

Released Date: 2016-09-01

STEP 5 – Install Fixture Body

A. Carefully tuck all wires into the outlet box and position the backplate of Fixture Body (C) over the outlet box. Align the holes in the backplate with the Mounting Screws (DD) or Alternate Short Mounting Screws (FF). Attach Fixture Body (C) using the Mounting Balls (EE). Hand tighten until snug.

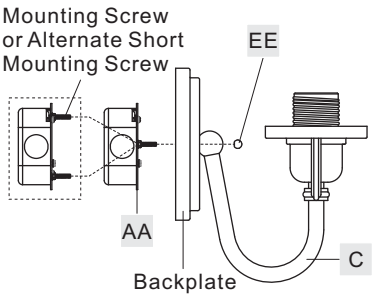

Figure 5

STEP 6 – Install Shade and Bulb

A. Place the Shade (B) over the socket and secure with the Socket Collar (A). Hand tighten until snug.
B. Insert bulb onto socket and screw snugly into place.

Your fixture is now assembled and ready to use. Enjoy!



Figure 6

DBN8701BN	DBN8701PN
FINISH: BRUSHED NICKEL	FINISH: PALLADIAN BRONZE

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/4″



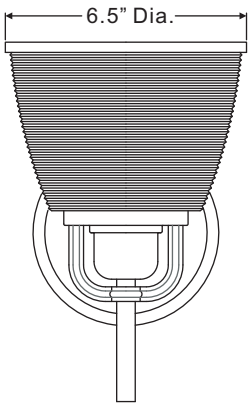

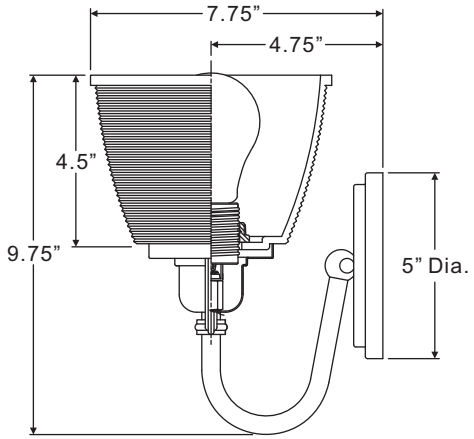

Thank you for purchasing a Quoizel product.
Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184
or visit us on-line at www.quoizel.com

© 2016 Quoizel Inc.

Released Date: 2016-09-01